



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED

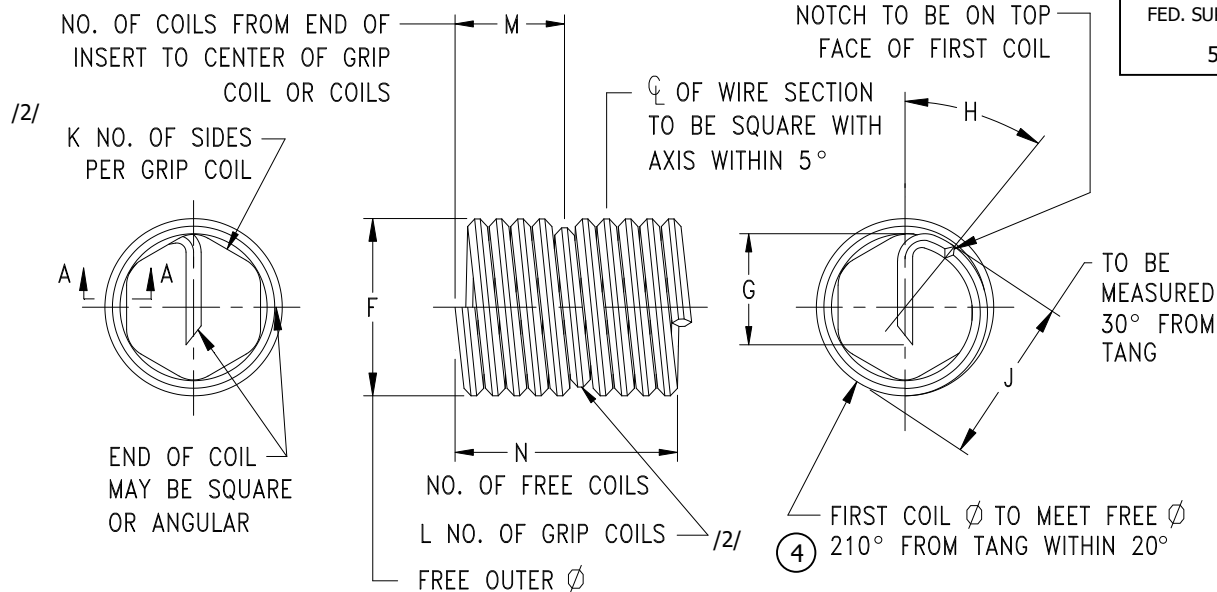


FIG.1

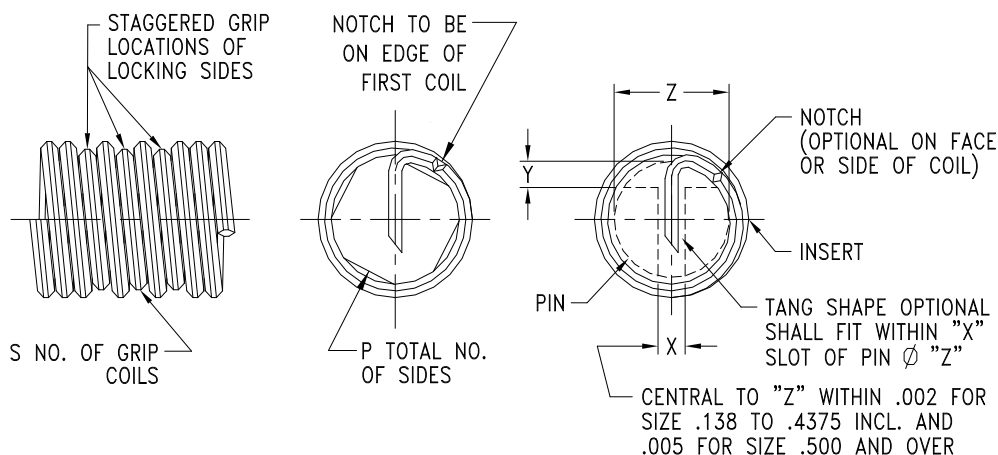


FIG.2

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21209, REVISION E. PART NUMBERS REMAIN MS21209.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 4
		CLASSIFICATION PART STANDARD NASM21209 SHEET 1 OF 8
PROCUREMENT SPECIFICATION NASM8846	TITLE INSERT, SCREW THREAD, COARSE AND FINE, SCREW LOCKING, HELICAL COIL, CRES	



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



④ TABLE I – DASH NUMBERS AND DIMENSIONS FOR COARSE THREAD SERIES (CONTINUED)

2 DIAMETER NOMINAL LENGTH						2.5 DIAMETER NOMINAL LENGTH				
NOMINAL THREAD SIZE	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL
.086-56	C0220	.172	.0117	3.6875	7.375	C0225	.215	.015	5.9375	9.625
.099-48	C0320	.198	.0174	3.625	7.250	C0325	.248	.0224	5.750	9.375
.112-40	C0420	.224	.0272	3.375	6.750	C0425	.280	.0348	5.500	8.875
.125-40	C0520	.250	.0345	3.875	7.750	C0525	.312	.044	6.125	10.000
.138-32	C0620	.276	.0525	3.4375	6.875	C0625	.345	.0666	5.4375	8.875
.164-32	C0820	.328	.0776	4.1875	8.375	C0825	.410	.1008	6.5625	10.750
.190-24	C1-20	.380	.1330	3.5625	7.125	C1-25	.475	.172	5.6875	9.250
.216-24	C2-20	.432	.172	4.1875	8.375	C2-25	.540	.208	6.4375	10.625
.250-20	C4-20	.500	.308	4.000	8.000	C4-25	.625	.385	6.375	10.375
.3125-18	C5-20	.625	.510	4.625	9.250	C5-25	.781	.658	7.250	11.875
.375-16	C6-20	.750	.862	5.000	10.000	C6-25	.938	1.064	7.875	12.875
.4375-14	C7-20	.875	1.250	5.125	10.250	C7-25	1.094	1.667	8.000	13.125
.500-13	C8-20	1.000	1.852	5.500	11.000	C8-25	1.250	2.273	8.625	14.125
.5625-12	C9-20	1.125	2.632	5.750	11.500	C9-25	1.406	3.226	9.000	14.750
.625-11	C1020	1.250	3.448	5.875	11.750	C1025	1.562	4.348	9.125	15.000
.750-10	C1220	1.500	5.263	6.500	13.000	C1225	1.875	6.667	10.000	16.500
.875-9	C1420	1.750	8.333	6.875	13.750	C1425	2.188	10.000	10.625	17.500
1.000-8	C1620	2.000	12.500	7.000	14.000	C1625	2.500	14.286	10.750	17.750
1.125-7	C1820	2.250	17.464	6.8125	13.625	C1825	2.812	22.000	10.6875	17.500
1.250-7	C2020	2.500	21.653	7.6875	15.375	C2025	3.125	27.236	11.8125	19.500
1.375-6	C2220	2.750	30.122	7.1875	14.375	C2225	3.438	37.981	11.1875	18.375
1.500-6	C2420	3.000	36.268	7.9375	15.875	C2425	3.750	45.620	12.1875	20.125

④ TABLE I – DASH NUMBERS AND DIMENSIONS FOR COARSE THREAD SERIES (CONTINUED)

3 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL
.086-56	C0230	.258	.0183	8.1875	11.875
.099-48	C0330	.297	.0271	7.875	11.500
.112-40	C0430	.336	.0423	7.500	10.875
.125-40	C0530	.375	.0536	8.375	12.250
.138-32	C0630	.414	.0807	7.4375	10.750
.164-32	C0830	.492	.125	9.0625	13.250
.190-24	C1-30	.570	.219	7.8125	11.375
.216-24	C2-30	.648	.279	8.9375	13.125
.250-20	C4-30	.750	.490	8.750	12.750
.3125-18	C5-30	.938	.806	10.000	14.625
.375-16	C6-30	1.125	1.316	10.875	15.750
.4375-14	C7-30	1.312	2.000	11.000	16.125
.500-13	C8-30	1.500	2.857	11.625	17.125
.5625-12	C9-30	1.688	4.000	12.125	17.875
.625-11	C1030	1.875	5.263	12.500	18.375
.750-10	C1230	2.250	8.333	13.625	20.125
.875-9	C1430	2.625	12.500	14.375	21.250
1.000-8	C1630	3.000	16.670	14.625	21.625
1.125-7	C1830	3.375	26.536	14.4375	21.250
1.250-7	C2030	3.750	32.819	16.0625	23.750
1.375-6	C2230	4.125	45.839	15.0625	22.250
1.500-6	C2430	4.500	54.972	16.5625	24.500

REVISION

4

NAS21209

SHEET 3



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



4 TABLE II – DASH NUMBERS AND DIMENSIONS FOR FINE THREAD SERIES

1 DIAMETER NOMINAL LENGTH						1.5 DIAMETER NOMINAL LENGTH				
NOMINAL THREAD SIZE	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL
.099-56	F0310	.099	.0051	1.6875	3.375	F0315	.148	.0084	2.8125	5.625
.112-48	F0410	.112	.0099	1.6875	3.375	F0415	.168	.0160	2.8125	5.625
.138-40	F0610	.138	.020	1.750	3.500	F0615	.207	.0304	3.000	6.000
.164-36	F0810	.164	.0325	1.9375	3.875	F0815	.246	.0502	3.250	6.500
.190-32	F1-10	.190	.0474	2.0625	4.125	F1-15	.285	.0784	3.4375	6.875
.250-28	F4-10	.250	.109	2.500	5.000	F4-15	.375	.155	4.125	8.250
.3125-24	F5-10	.312	.180	2.750	5.500	F5-15	.469	.284	4.4375	8.875
.375-24	F6-10	.375	.259	3.4375	6.875	F6-15	.562	.420	5.500	11.000
.4375-20	F7-10	.438	.459	3.3125	6.625	F7-15	.656	.699	5.3125	10.625
.500-20	F8-10	.500	.595	3.9375	7.875	F8-15	.750	.909	6.1875	12.375
.5625-18	F9-10	.562	.826	4.000	8.000	F9-15	.844	1.266	6.250	12.500
.625-18	F1010	.625	1.010	4.500	9.000	F1015	.938	1.562	7.0625	14.125
.750-16	F1210	.750	1.695	4.875	9.750	F1215	1.125	2.564	7.5625	15.125
.875-14	F1410	.875	2.564	4.9375	9.875	F1415	1.312	4.000	7.750	15.500
1.000-12	F1610	1.000	3.875	4.8125	9.625	F1615	1.500	6.063	7.500	15.000
1.125-12	F1810	1.125	4.917	5.5625	11.125	F1815	1.688	7.572	8.625	17.250
1.250-12	F2010	1.250	6.254	6.250	12.500	F2015	1.875	9.502	9.6875	19.375
1.375-12	F2210	1.375	7.359	6.875	13.750	F2215	2.062	11.276	10.6875	21.375
1.500-12	F2410	1.500	8.799	7.625	15.250	F2415	2.250	13.650	11.750	23.500

4 TABLE II – DASH NUMBERS AND DIMENSIONS FOR FINE THREAD SERIES (CONTINUED)

2 DIAMETER NOMINAL LENGTH						2.5 DIAMETER NOMINAL LENGTH				
NOMINAL THREAD SIZE	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL
.099-56	F0320	.198	.0117	4.000	8.000	F0325	.248	.0192	6.375	10.375
.112-48	F0420	.224	.0222	3.9375	7.875	F0425	.280	.0285	6.3125	10.250
.138-40	F0620	.276	.0408	4.1875	8.375	F0625	.345	.0512	6.5625	10.750
.164-36	F0820	.328	.0680	4.5625	9.125	F0825	.410	.0857	7.0625	11.625
.190-32	F1-20	.380	.112	4.750	9.500	F1-25	.475	.140	7.500	12.000
.250-28	F4-20	.500	.212	5.6875	11.375	F4-25	.625	.276	8.8125	14.500
.3125-24	F5-20	.625	.397	6.125	12.250	F5-25	.781	.490	9.500	15.625
.375-24	F6-20	.750	.553	7.500	15.000	F6-25	.938	.709	11.625	19.125
.4375-20	F7-20	.875	.917	7.3125	14.625	F7-25	1.094	1.250	11.1875	18.500
.500-20	F8-20	1.000	1.234	8.4375	16.875	F8-25	1.250	1.563	12.9375	21.375
.5625-18	F9-20	1.125	1.695	8.5625	17.125	F9-25	1.406	2.128	13.1875	21.750
.625-18	F1020	1.250	2.083	9.625	19.250	F1025	1.562	2.632	14.625	24.250
.750-16	F1220	1.500	3.448	10.3125	20.625	F1225	1.875	4.348	15.6875	26.000
.875-14	F1420	1.750	5.263	10.5625	21.125	F1425	2.188	6.667	16.0625	26.625
1.000-12	F1620	2.000	8.188	10.250	20.500	F1625	2.500	10.406	15.750	26.000
1.125-12	F1820	2.250	10.227	11.6875	23.375	F1825	2.812	12.882	17.8125	29.500
1.250-12	F2020	2.500	12.750	13.125	26.250	F2025	3.125	15.998	19.875	33.000
1.375-12	F2220	2.750	15.194	14.4375	28.875	F2225	3.438	19.111	22.0625	36.500
1.500-12	F2420	3.000	18.501	15.8125	31.625	F2425	3.750	23.352	24.0625	39.875

REVISION

4

NASM21209

SHEET 4



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



TABLE II – DASH NUMBERS AND DIMENSIONS FOR FINE THREAD SERIES (CONTINUED)

4

3 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO.	LENGTH (REF)	WEIGHT LBS/100	M ±1 COIL	N ± .25 COIL
.099-56	F0330	.297	.0234	8.625	12.625
.112-48	F0430	.336	.0346	8.5625	12.500
.138-40	F0630	.414	.0616	9.0625	13.250
.164-36	F0830	.492	.1034	9.6875	14.250
.190-32	F1-30	.570	.170	10.125	14.875
.250-28	F4-30	.750	.338	11.9375	17.625
.3125-24	F5-30	.938	.602	12.875	19.000
.375-24	F6-30	1.125	.862	15.625	23.125
.4375-20	F7-30	1.312	1.493	15.1875	22.500
.500-20	F8-30	1.500	1.887	17.4375	25.875
.5625-18	F9-30	1.688	2.564	17.6875	26.250
.625-18	F1030	1.875	3.030	19.750	29.375
.750-16	F1230	2.250	5.263	21.1875	31.500
.875-14	F1430	2.625	7.692	21.6875	32.250
1.000-12	F1630	3.000	12.815	21.250	31.500
1.125-12	F1830	3.375	15.536	24.0625	35.750
1.250-12	F2030	3.750	19.246	26.750	39.875
1.375-12	F2230	4.125	23.028	29.5625	44.000
1.500-12	F2430	4.500	28.203	32.3125	48.125

TABLE III – INSERT DIMENSIONS COARSE THREAD

NOMINAL THREAD SIZE	A MIN	B		C GAGE	D		E		F	
		MIN	MAX		MIN	MAX	MIN	MAX	MIN	MAX
.086-56	.0027	.0163	.0193	.00893	.0112	.0116	.0126	.0156	.110	.119
.099-48	.0043	.0196	.0226	.01042	.01313	.01353	.0152	.0182	.128	.137
.112-40	.0068	.0241	.0271	.0125	.01584	.01624	.0189	.0219	.144	.159
.125-40	.0068	.0241	.0271	.0125	.01584	.01624	.0189	.0219	.158	.173
.138-32	.0076	.0295	.0338	.01563	.01985	.02030	.0233	.0273	.178	.193
.164-32	.0076	.0295	.0338	.01563	.01985	.02030	.0233	.0273	.205	.220
.190-24	.0120	.0410	.0449	.02083	.02656	.02706	.0305	.0365	.244	.259
.216-24	.0120	.0410	.0449	.02083	.02656	.02706	.0305	.0365	.270	.285
.250-20	.0164	.050	.0540	.02500	.03198	.03248	.0378	.0438	.310	.330
.3125-18	.0176	.056	.060	.02778	.03558	.03608	.0416	.0486	.380	.400
.375-16	.0215	.0636	.0677	.03125	.04009	.04059	.0477	.0547	.452	.472
.4375-14	.0267	.0730	.0770	.03571	.04589	.04639	.0545	.0625	.526	.551
.500-13	.0273	.0758	.0829	.03846	.04946	.04996	.0593	.0673	.597	.622
.5625-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	.669	.694
.625-11	.0351	.0909	.0980	.04545	.05855	.05905	.0715	.0795	.742	.767
.750-10	.0402	.1007	.1079	.05000	.06445	.06495	.0795	.0875	.881	.906
.875-9	.0466	.1124	.1199	.05556	.07167	.07217	.0892	.0972	1.022	1.052
1.000-8	.0544	.1264	.1350	.06250	.08069	.08119	.1004	.1094	1.166	1.196
1.125-7	.0645	.1451	.1546	.07143	.09229	.09279	.1160	.1250	1.315	1.355
1.250-7	.0645	.1451	.1546	.07143	.09229	.09279	.1160	.1250	1.443	1.483
1.375-6	.0775	.1695	.1799	.08333	.10775	.10825	.1368	.1458	1.598	1.643
1.500-6	.0775	.1695	.1799	.08333	.10775	.10825	.1368	.1458	1.727	1.772

REVISION

4

NASM21209

SHEET 5

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR ANY LIABILITY THEREIN OF PATENT OR TRADEMARK RIGHTS.



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



TABLE IV – INSERT DIMENSIONS FINE THREAD

NOMINAL THREAD SIZE	A MIN	B		GAGE	D		E		F	
		MIN	MAX		MIN	MAX	MIN	MAX	MIN	MAX
.099-56	.0027	.0163	.0193	.00893	.0112	.0116	.0126	.0156	.131	.146
.112-48	.0043	.0196	.0226	.01042	.01313	.01353	.0152	.0182	.147	.162
.138-40	.0068	.0241	.0271	.01250	.01584	.01624	.0189	.0219	.173	.193
.164-36	.0059	.0261	.0301	.01389	.01764	.01804	.0203	.0243	.204	.224
.190-32	.0076	.0295	.0338	.01563	.01985	.02030	.0233	.0273	.236	.256
.250-28	.0085	.0347	.0387	.01786	.02270	.02320	.0253	.0313	.306	.326
.3125-24	.0120	.0410	.0449	.02083	.02656	.02706	.0305	.0365	.380	.400
.375-24	.0120	.0410	.0449	.02083	.02656	.02706	.0305	.0365	.448	.468
.4375-20	.0164	.0500	.0540	.02500	.03198	.03248	.0378	.0438	.524	.549
.500-20	.0164	.0500	.0540	.02500	.03198	.03248	.0378	.0438	.592	.617
.5625-18	.0176	.0560	.0600	.02778	.03558	.03608	.0416	.0486	.666	.691
.625-18	.0176	.0560	.0600	.02778	.03558	.03608	.0416	.0486	.733	.758
.750-16	.0215	.0636	.0677	.03125	.04009	.04059	.0477	.0547	.876	.901
.875-14	.0267	.0730	.0770	.03571	.04589	.04639	.0545	.0625	1.021	1.051
1.000-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	1.169	1.199
1.125-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	1.304	1.334
1.250-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	1.439	1.469
1.375-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	1.575	1.610
1.500-12	.0334	.0861	.0900	.04167	.05363	.05413	.0649	.0729	1.710	1.745

④

TABLE IV – INSERT DIMENSIONS FINE THREAD (CONTINUED)

NOMINAL THREAD SIZE	G		H		J		K OPTIONAL /2/	L OPTIONAL /2/	P	S ± .25 COIL	R MIN	T MIN
	MIN	MAX	MIN	MAX	MIN	MAX						
.099-56	.072	.090	75°	150°	.131	.146	4	±	-	-	.0032	.0056
.112-48	.060	.095	75°	150°	.147	.162	4	±	4	2.33	.0038	.0065
.138-40	.100	.130	25°	100°	.173	.193	4	±	4	2.33	.0045	.0078
.164-36	.117	.147	20°	100°	.204	.224	4	±	4	2.33	.0050	.0087
.190-32	.131	.182	15°	90°	.236	.256	5	±	4	1.75	.0056	.0098
.250-28	.178	.244	15°	75°	.306	.326	5	±	6	4.0	.0064	.0112
.3125-24	.209	.291	15°	75°	.380	.400	6	±	9	5.25	.0075	.0130
.375-24	.240	.353	15°	75°	.448	.468	6	±	10	5.25	.0075	.0130
.4375-20	.287	.416	15°	75°	.524	.549	6	±	8	4.0	.0090	.0156
.500-20	.318	.479	15°	75°	.592	.617	6	±	10	5.25	.0090	.0156
.5625-18	.354	.541	15°	75°	.666	.691	6	±	10	5.25	.0100	.0174
.625-18	.386	.588	15°	75°	.733	.758	6	±	10	5.25	.0100	.0174
.750-16	.464	.557	15°	75°	.876	.901	7	±	12	6.25	.0113	.0195
.875-14	.495	.604	15°	75°	1.021	1.051	8	±	12	6.25	.0129	.0223
1.000-12	.526	.728	15°	75°	1.169	1.199	8	±	14	7.5	.0150	.0260
1.125-12	.557	.819	10°	70°	1.304	1.334	8	±	14	7.5	.0150	.0260
1.250-12	.679	.941	10°	70°	1.344	1.374	8	±	14	7.5	.0150	.0260
1.375-12	.689	1.001	10°	70°	1.469	1.504	10	±	14	7.5	.0150	.0260
1.500-12	.811	1.123	10°	70°	1.594	1.629	11	±	14	7.5	.0150	.0260

REVISION

4

NASM21209

SHEET 7



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2021 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



TABLE IV – INSERT DIMENSIONS FINE THREAD (CONTINUED)

NOMINAL THREAD SIZE	X +.001 -.000	Y +.001 -.000	Z +.000 -.001
.099-56	-	-	-
.112-48	-	-	-
.138-40	-	-	-
.164-36	-	-	-
.190-32	.052	.020	.153
.250-28	.060	.020	.208
.3125-24	.070	.024	.265
.375-24	.070	.024	.328
.4375-20	.088	.046	.380
.500-20	.090	.046	.422
.5625-18	.100	.066	.500
.625-18	.100	.089	.563
.750-16	.109	.087	.679
.875-14	.125	.135	.794
1.000-12	-	-	-
1.125-12	-	-	-
1.250-12	-	-	-
1.375-12	-	-	-
1.500-12	-	-	-

- ④ NOMINAL LENGTH: NOMINAL LENGTH EQUALS MINIMUM THROUGH HOLE LENGTH WITHOUT COUNTERSINK AND WITH INSERT LOCATED .25 TO .50 THREAD PITCH BELOW TOP SURFACE.
- FREE COILS: THE NUMBER OF FREE COILS OF THE INSERT ARE COUNTED 90° FROM TANG FOR ALL SIZES.
- MATERIAL: STEEL, CORROSION RESISTANT. SEE PROCUREMENT SPECIFICATION.
- THREAD: INSERT, WHEN ASSEMBLED IN BASIC TAPPED HOLE AS SPECIFIED ON STANDARD NASM33537, SHALL PRODUCE A FINISHED THREAD MEETING THE REQUIREMENTS OF FED-STD-H28 AND SHALL ACCEPT EXTERNAL THREADED PARTS WHICH ARE THREADED TO MIL-S-7742 OR AS8879.
- SURFACE ROUGHNESS: ASME B46.1.
- DIMENSIONS IN INCHES, APPLY BEFORE PLATING. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
- COLOR IDENTIFICATION: (a) BARE INSERTS - DYED RED
(b) DRY FILM LUBRICATED - DARK GREY
(c) CADMIUM PLATED - OLIVE DRAB
- LUBRICANT: DRY FILM LUBRICANT SHALL BE IN ACCORDANCE WITH AS5272.
- PLATING: CADMIUM PLATING SHALL BE IN ACCORDANCE WITH AMS-QQ-P-416, TYPE II, EXCEPT THE THICKNESS SHALL BE A MINIMUM OF 0.0001.
- ADD THE LETTER "L" AFTER THE PART NUMBER TO DESIGNATE A DRY FILM LUBRICANT COATED INSERT.
- ADD THE LETTER "P" AFTER THE PART NUMBER TO DESIGNATE A CADMIUM PLATED INSERT.
- THE MS PART NUMBER CONSISTS OF THE BASIC MS NUMBER PLUS THE DASH NUMBER.

EXAMPLE OF PART NUMBER: MS21209C0415 = A SCREW LOCKING HELICAL COIL INSERT (MS21209), COARSE THREAD (C), .112-40 THREAD SIZE (04), 1.5 DIA NOMINAL LENGTH (15).
MS21209F4-20L = A SCREW LOCKING HELICAL COIL INSERT (MS21209), FINE THREAD (F), .250-28 THREAD SIZE (4), 2.0 DIA NOMINAL LENGTH (-20), WITH A DRY FILM LUBRICANT (L).
MS21209F1225P = A SCREW LOCKING HELICAL COIL INSERT (MS21209), FINE THREAD (F), .750-16 THREAD SIZE (12), 2.5 DIA NOMINAL LENGTH (25), WITH CADMIUM PLATING (P).

- NOTE: (1) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- /2/ NUMBER OF GRIP COILS AND NUMBER OF SIDES PER GRIP COIL ARE OPTIONAL. INSERTS MUST MEET LOCKING TORQUE REQUIREMENTS PER NASM8846.

REVISION
4
NASM21209
SHEET 8