

Aerospace series
Bolt, blind, 130° flush shear head
Self-locking

When this standard is applied, a careful check must be made as to whether any protective rights exist. This standard issuer hereby disclaims any liability for infringement of patent or design rights resulting from the use of this standard.

Published and distributed by :
AIRBUS S.A.S.
ENGINEERING DIRECTORATE
31707 BLAGNAC Cedex
FRANCE

Contents

- 1 Scope
- 2 Normative references
- 3 Requirements
- 4 Designation
- 5 Marking
- 6 Technical specification
- 7 Example of installation

1 Scope

This standard specifies the required characteristics of a blind, 130° flush shear head, self-locking bolt for use in aerospace applications.

2 Normative references

This Airbus Standard incorporates by dated or undated reference provisions from other publications. All normative references cited at the appropriate places in the text are listed hereafter. For dated references, subsequent amendments to or revisions of any these publications apply to this Airbus Standard only when incorporated in it by amendment of revision. For undated references, the latest issue of the publication referred to shall be applied.

ABS2320	Fastener, Blind, High strength, General technical specification
AMS2486	Conversion Coating of Titanium Alloys Fluoride-Phosphate Type ²
AMS2700	Passivation of corrosion resistant steels ²
AMS4928	Titanium Alloy Bars, Wire, Forgings, Rings, and Drawn Shapes 6Al - 4V Annealed ²
AMS4967	Titanium Alloy, Bars, Wire, Forgings, and Rings 6.0Al - 4.0V Annealed, Heat Treatable ²
AMS5639	Steel, Corrosion-Resistant, Bars, Wire, Forgings, Tubing, and Rings 19Cr - 10Ni Solution Heat Treated ²
AMS5731	Steel, Corrosion and Heat-Resistant, Bars, Wire, Forgings, Tubing, and Rings 15Cr - 25.5Ni - 1.2Mo - 2.1Ti - 0.006B - 0.30V Consumable Electrode Melted, 1800 °F (982 °C) Solution Heat Treated ²
AMS5732	Steel, Corrosion and Heat-Resistant, Bars, Wire, Forgings, Tubing, and Rings 15Cr - 25.5Ni - 1.2Mo - 2.1Ti - 0.006B - 0.30V Consumable Electrode Melted 1800 °F (982 °C) Solution and Precipitation Heat Treated ²
AMS5737	Steel, Corrosion and Heat-Resistant, Bars, Wire, Forgings and Tubing, 15Cr - 25.5Ni - 1.2Mo - 2.1Ti - 0.006B - 0.30V Consumable Electrode Melted 1650 °F (899 °C) Solution and Precipitation Heat Treated ²
AMS6930	Titanium Alloy Bars, Forgings and Forging Stock 6.0Al – 4.0V Solution Heat Treated and Aged ²
AMS-H-81200	Heat Treatment of Titanium and Titanium Alloys ²
AS5272	Lubricant, Solid film, Heat Cured, Corrosion Inhibiting, Procurement Specification ²
AS87132	Lubricant, Cetyl Alcohol, 1-Hexadecanol, Application to Fasteners ¹
ASTM D4181	Classification for Acetal molding and extrusions ²
EN2424	Aerospace series – Marking of aerospace products ³
FCBF200	Procurement Specification
ISO2768-1	General tolerances – Tolerances for linear and angular dimensions without individual tolerance indications
MBF2000	Procurement Specification
MBF2003	Installation and inspection specification
MIL-C-83488	Coating, aluminium, Ion Vapor Deposited ⁴

¹ Published by: Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001, USA

² Published by: American Society for Testing and Materials (ASTM),
100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, USA

³ Published as ASD Standard at the date of publication of this standard

⁴ Published by: Department of Defense (DoD), the Pentagon, Washington, D.C., 20307, USA

3 Requirements

3.1 Configuration, dimensions, tolerances and mass

The configuration, dimensions, tolerances and mass shall be in accordance with figures 1, 2 and 3, and tables 1, 2 and 3.

For 1st oversizes the configuration dimensions tolerances and mass shall be in accordance with figures 1, 2 and 3, and tables 4 and 5.

Tolerances not specified, shall be in accordance with ISO2768-1 tolerance class m.

3.1.1 Locking

Locking feature consists of three indentations located approximately 120° apart on the periphery of the nut component. Distortion of the shank shall not prevent insertion of the fastener into a ring gauge of diameter equivalent to minimum recommended hole size. Force of insertion shall not exceed 5.0 pounds.

3.1.2 Holes

Holes should be straight and perpendicular to surface, and should be reasonably round and free from delaminations.


Edges of holes should be given a slight chamfer.

3.1.3 Core bolt break-off


Core bolt break-off limits are measured from top of nut head.

3.1.4 Specification

Installation and inspection specification as per MBF2003.

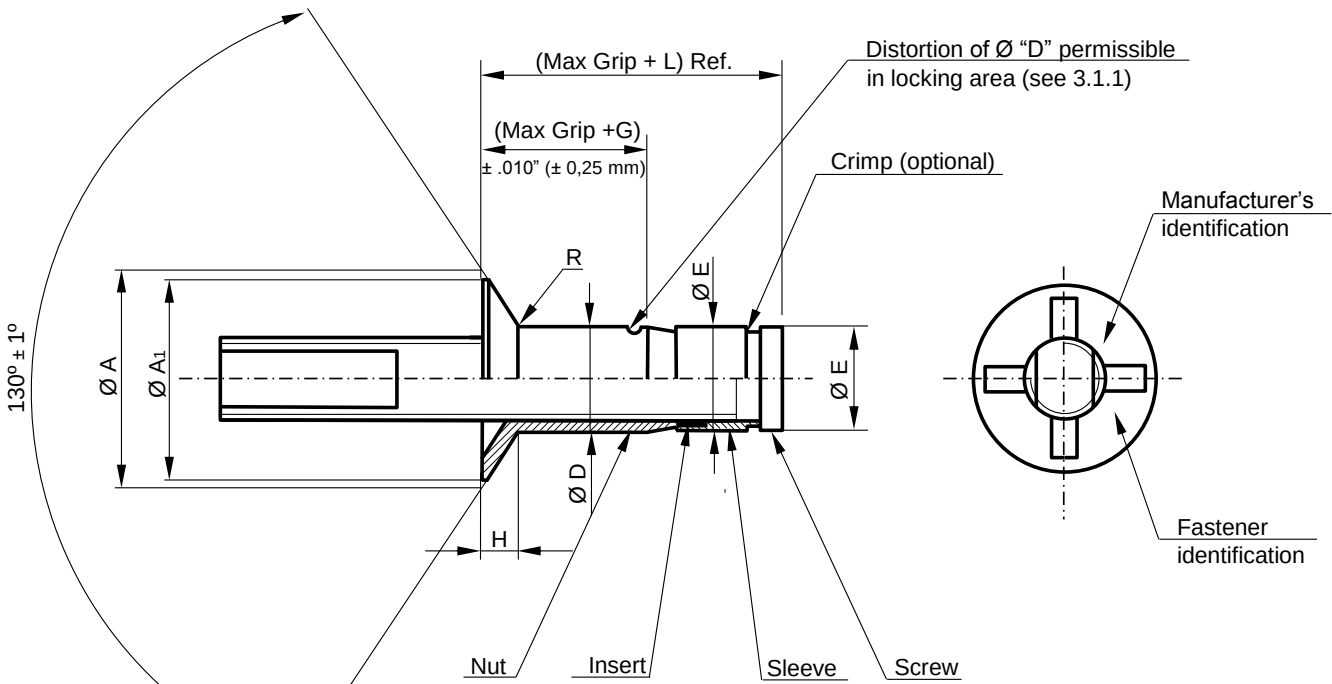

Inactive for Design as of 1st August 2014
use Code Z


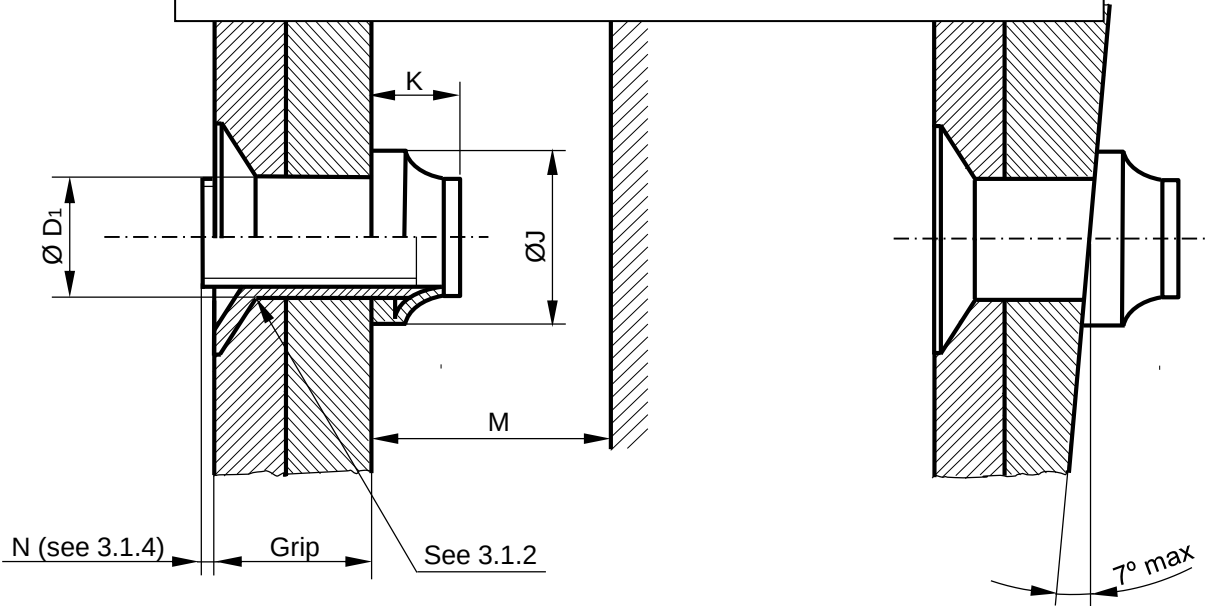


Typical installation


To be used on surfaces
with slope up to 7° max

Code "Y" (without drive nut for installation)

Figure 1: Configuration code Y

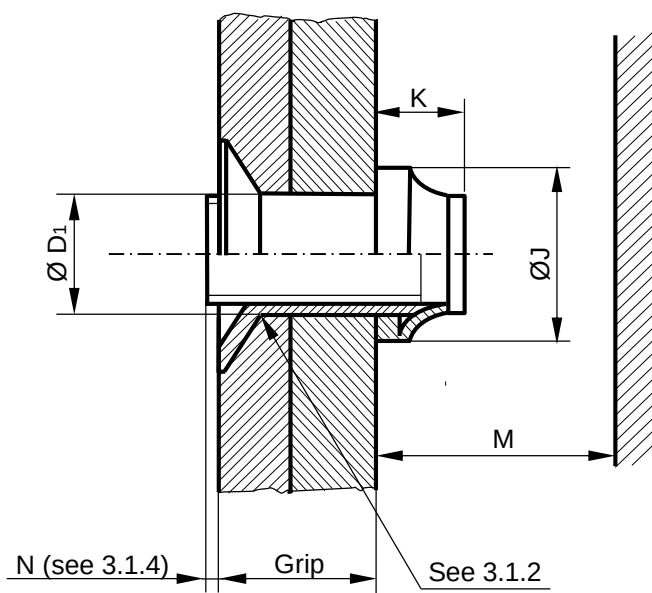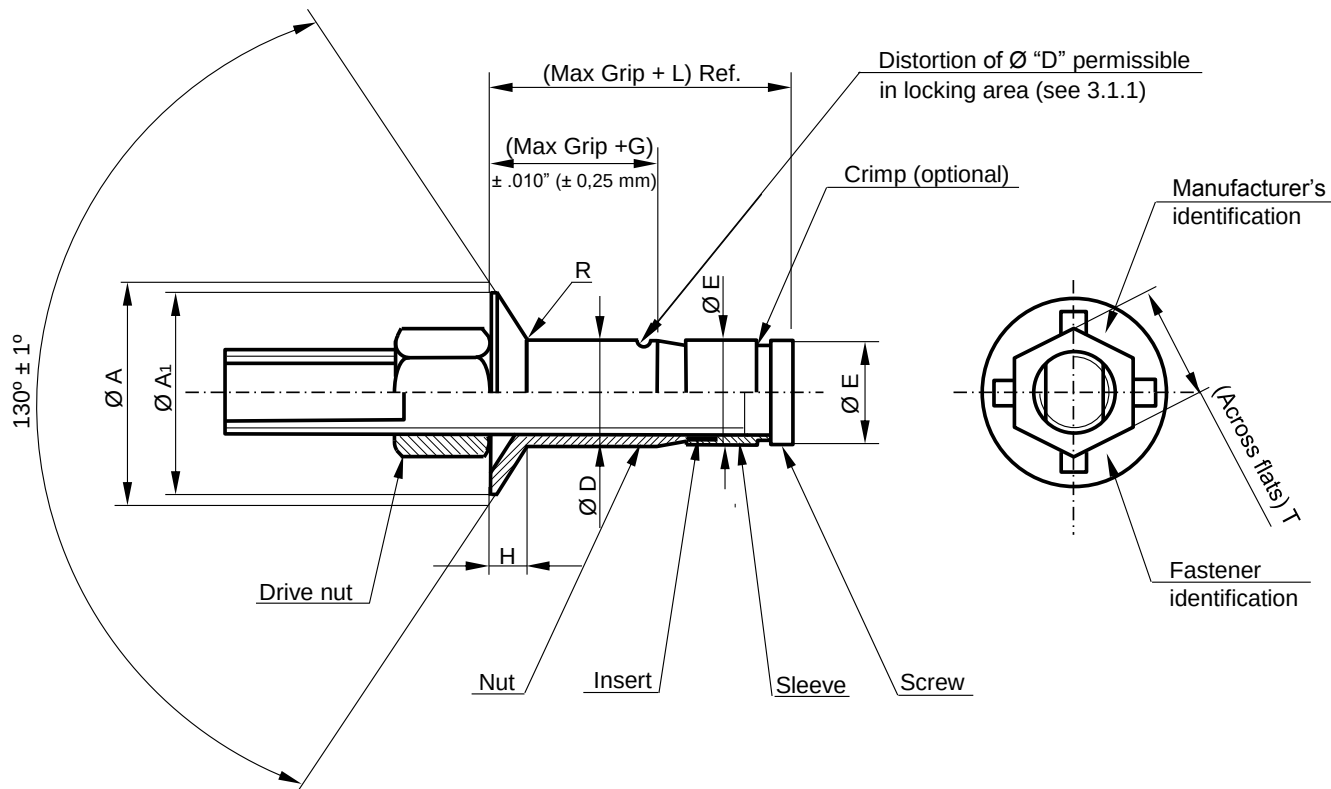


Typical installation

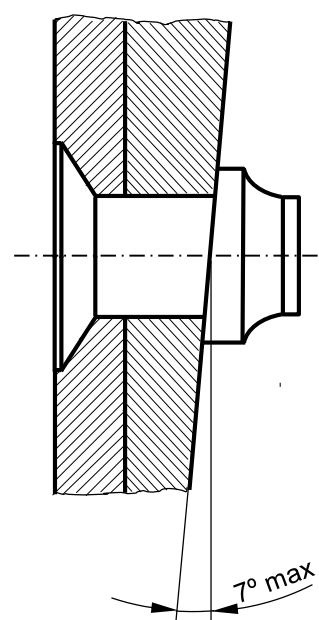


To be used on surfaces
with slope up to 7° max

Code "Z" (with drive nut for installation)

Figure 2: Configuration code Z

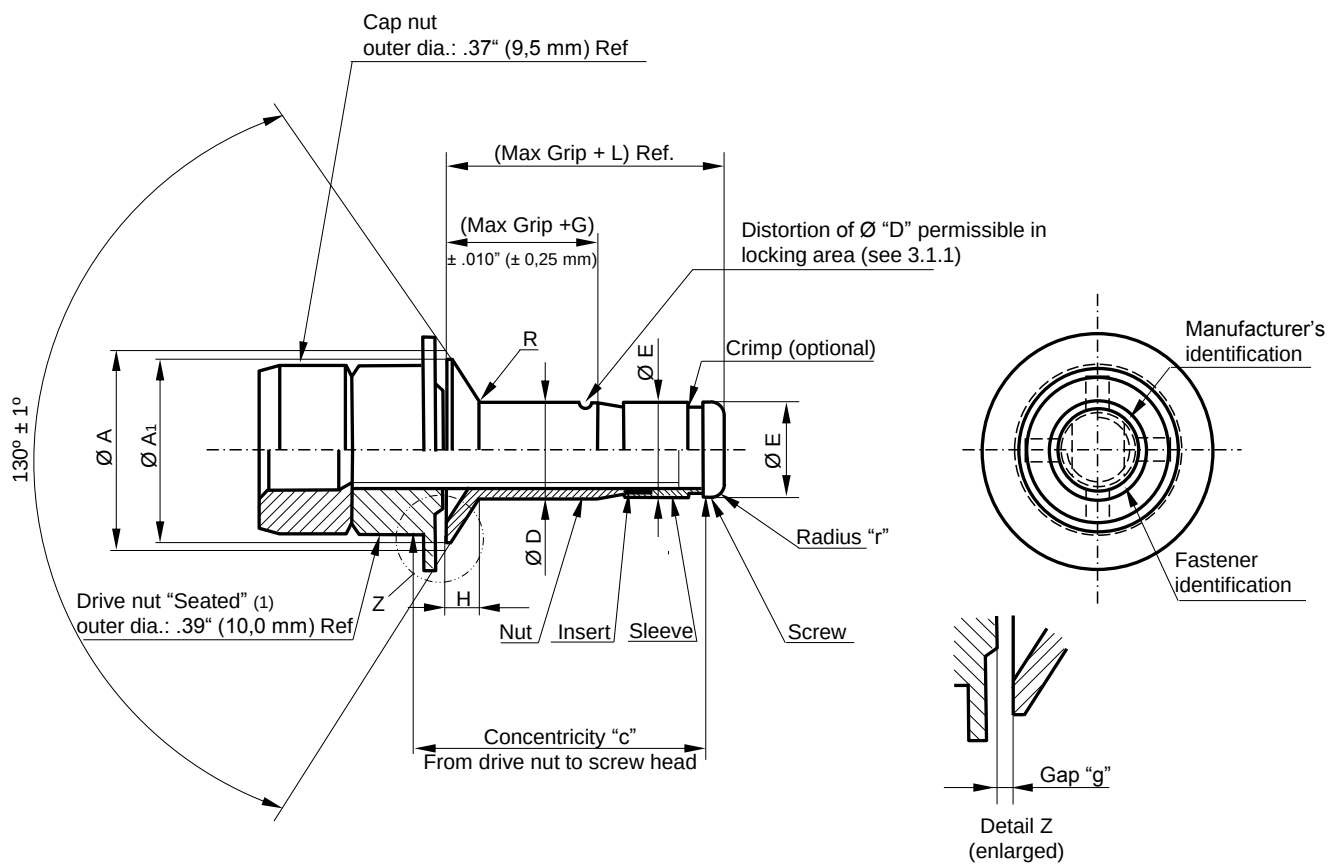

- (1) Normal shipping condition is with the drive nut seated on the fastener body
(2) Specific dimensions and tolerances for robotic version are indicated in table 2

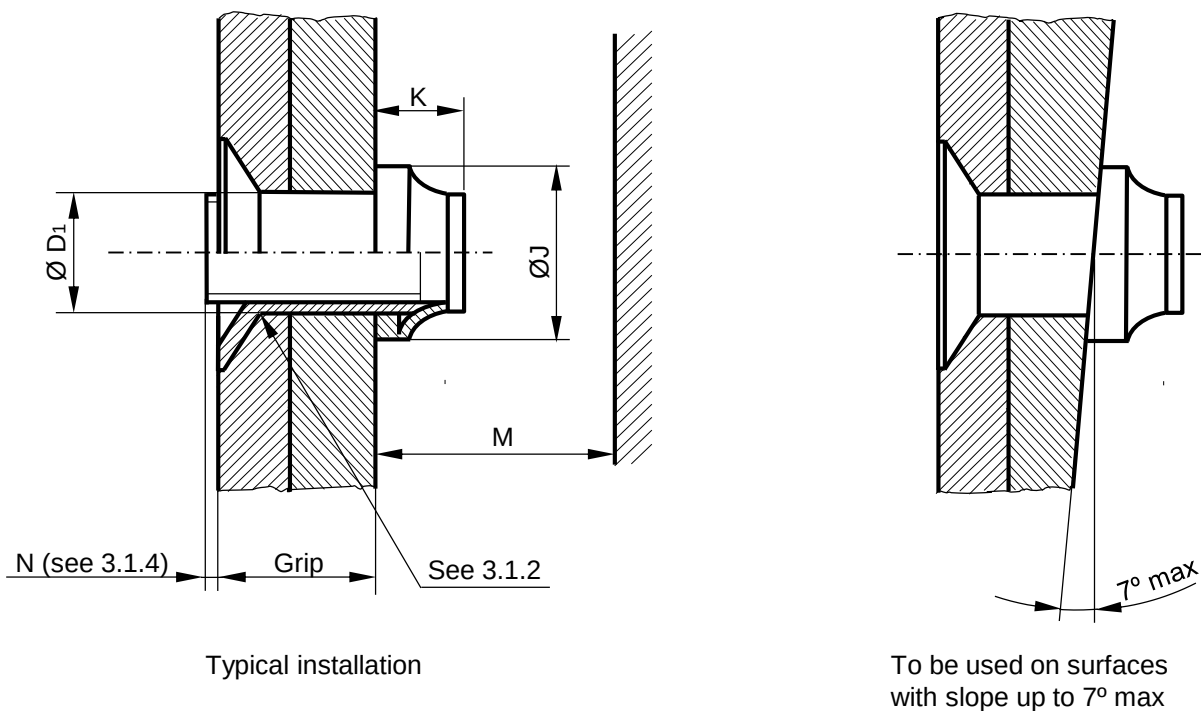

Code "A" (with cap and drive nuts for robotic installation)

Figure 3: Configuration code A

Table 1: Dimensions and tolerances (continued)

Dimensions in inch (mm)

Diameter Dash Number	Nominal Ø	Ø A Theoretical Not for insp. purposes	Ø A ₁ Min.	Ø D	Ø E Max.	G Ref.	H Ref.	L Ref.	R Max.	T Ref.		
−5	5/32 (4,0)	.332 .325 (8,43) (8,26)	.296 (7,52)	.1645 .1625 (4,178) (4,128)	.1640 (4,165)	.017 (0,43)	.039 (0,99)	.512 (13,00)	.030 (0,76)	.375 (9,52)		
−6	3/16 (4,8)	.385 .378 (9,78) (9,60)	.342 (8,69)	.1985 .1965 (5,042) (4,991)	.1985 (5,041)	.027 (0,68)	.043 (1,09)	.575 (14,60)				
−7	7/32 (5,6)	.416 .409 (10,56) (10,39)	.373 (9,47)	.2275 .2255 (5,778) (5,728)	.2275 (5,778)	.035 (0,89)		.635 (16,13)				
−8	1/4 (6,4)	.507 .499 (12,88) (12,67)	.463 (11,76)	.2595 .2575 (6,591) (6,541)	.2595 (6,591)	.055 (1,40)	.057 (1,45)	.700 (17,78)				
−9	9/32 (7,2)	.538 .530 (13,66) (13,46)	.494 (12,55)	.2895 .2875 (7,353) (7,303)	.2895 (7,353)	.065 (1,65)		.815 (20,70)		.500 (12,70)		
-10	5/16 (7,9)	.635 .626 (16,13) (15,90)	.577 (14,66)	.3115 .3095 (7,912) (7,861)	.3110 (7,899)	.070 (1,78)	.075 (1,90)	.892 (22,66)	.040 (1,02)			
-11	11/32 (8,7)	.666 .657 (16,92) (16,69)	.608 (15,44)	.3435 .3415 (8,725) (8,674)	.3433 (8,720)	.075 (1,90)	.074 (1,88)	.941 (23,90)				

Table 1: Dimensions and tolerances (concluded)

Dimensions in inch (mm)							
Diameter Dash Number	Nominal Ø	Ø D1 Recm hole size 1) 2)	Ø J Min. 2)	K Max. 2)	M Ref. 2)	N See sub-chapter 3.1.4 2)	
-5	5/32 (4,0)	.168 .165 (4,27) (4,19)	.250 (6,35)	.300 (7,62)	.582 (14,78)	+.103 0 +(2,62) (0)	
-6	3/16 (4,8)	.202 .199 (5,13) (5,06)	.300 (7,62)	.350 (8,89)	.645 (16,38)		
-7	7/32 (5,6)	.231 .228 (5,87) (5,79)	.350 (8,89)	.400 (10,16)	.704 (17,88)		
-8	1/4 (6,4)	.263 .260 (6,68) (6,60)	.400 (10,16)	.450 (11,43)	.770 (19,56)		
-9	9/32 (7,2)	.293 .290 (7,44) (7,37)	.450 (11,43)	.500 (12,70)	.885 (22,48)		
-10	5/16 (7,9)	.315 .312 (8,00) (7,92)	.475 (12,06)	.550 (13,97)	.962 (24,43)		
-11	11/32 (8,7)	.347 .344 (8,81) (8,74)	.525 (13,34)	.575 (14,60)	1.011 (25,68)		
1) Only for information. Check applicable Engineering documentation. 2) Installation, see sub-chapters 3.1.2 to 3.1.5.							

Table 2: Dimensions and tolerances of fastener for robotic installation

Dimensions in inch (mm)

Diameter Dash Number	Nominal Ø	Radius “r”		Gap “g”		Concentricity “c”
		Min.	Max.	Min.	Max.	Max.
-5	5/32 (4,0)	.010 (0,25)	.030 (0,76)	.005 (0,13)	.042 (1,07)	.030 (0,76)
-6	3/16 (4,8)	.015 (0,38)	.035 (0,89)	.006 (0,15)	.050 (1,27)	.030 (0,76)
-7	7/32 (5,6)	.015 (0,38)	.035 (0,89)	.006 (0,15)	.055 (1,40)	.030 (0,76)
-8	1/4 (6,4)	.020 (0,51)	.040 (1,02)	.008 (0,20)	.062 (1,58)	.030 (0,76)
-9	9/32 (7,2)	.020 (0,51)	.040 (1,02)	.071 (1,80)	.030 (0,76)	.030 (0,76)

Table 3: Grip range and mass

Diameter Dash Number						-5	-6	-7	-8	-9	-10	-11	
Nominal Diameter					inch	5/32	3/16	7/32	1/4	9/32	5/16	11/32	
					mm	4,0	4,8	5,6	6,4	7,2	7,9	8,7	
Grip Code No		Grip Range				Mass kg/1000 Parts (Ref)							
		inch		mm									
Old ¹⁾	New	Max.	Min.	Max.	Min.								
-100	-100	.100	.050	2,54	1,27	0,89	---	---	---	---	---	---	
-150	-150	.150	.100	3,81	2,54	1,15	1,84	2,63	3,79	5,31	6,43	8,19	
-200	-200	.200	.150	5,08	3,81	1,25	1,99	2,82	4,05	5,63	6,79	8,63	
-250	-250	.250	.200	6,35	5,08	1,35	2,13	3,02	4,30	5,95	7,15	9,07	
-300	-300	.300	.250	7,62	6,35	1,44	2,28	3,21	4,56	6,27	7,50	9,51	
-350	-350	.350	.300	8,89	7,62	1,54	2,43	3,40	4,81	6,60	7,86	9,95	
-400	-400	.400	.350	10,16	8,89	1,64	2,57	3,60	5,07	6,92	8,22	10,40	
-450	-450	.450	.400	11,43	10,16	1,74	2,72	3,79	5,32	7,24	8,58	10,84	
-500	-500	.500	.450	12,70	11,43	1,84	2,87	3,99	5,57	7,56	8,94	11,28	
-550	-550	.550	.500	13,97	12,70	1,94	3,02	4,18	5,83	7,88	9,30	11,72	
-600	-600	.600	.550	15,24	13,97	2,04	3,16	4,37	6,08	8,21	9,66	12,16	
-650	-650	.650	.600	16,51	15,24	2,13	3,31	4,57	6,34	8,53	10,02	12,61	
-700	-700	.700	.650	17,78	16,51	2,23	3,46	4,76	6,59	8,85	10,38	13,05	
-750	-750	.750	.700	19,05	17,78	2,33	3,60	4,96	6,85	9,17	10,73	13,49	
-800	-800	.800	.750	20,32	19,05	2,43	3,75	5,15	7,10	9,49	11,09	13,93	
-850	-850	.850	.800	21,59	20,32	2,53	3,90	5,34	7,36	9,82	11,45	14,37	
-900	-900	.900	.850	22,86	21,59	2,63	4,04	5,54	7,61	10,14	11,81	14,81	
-950	-950	.950	.900	24,13	22,86	2,72	4,19	5,73	7,86	10,46	12,17	15,26	
-1000	M00	1.000	.950	25,40	24,13	2,82	4,34	5,93	8,12	10,78	12,53	15,70	
-1050	M05	1.050	1.000	26,67	25,40	2,92	4,49	6,12	8,37	11,10	12,89	16,14	
-1100	M10	1.100	1.050	27,94	26,67	3,02	4,63	6,32	8,63	11,43	13,25	16,58	
-1150	M15	1.150	1.100	29,21	27,94	3,12	4,78	6,51	8,88	11,75	13,60	17,02	
-1200	M20	1.200	1.150	30,48	29,21	3,22	4,93	6,70	9,14	12,07	13,96	17,47	
-1250	M25	1.250	1.200	31,75	30,48	3,31	5,07	6,90	9,39	12,39	14,32	17,91	
-1300	M30	1.300	1.250	33,02	31,75	3,41	5,22	7,09	9,64	12,71	14,68	18,35	
-1350	M35	1.350	1.300	34,29	33,02	3,51	5,37	7,29	9,90	13,04	15,04	18,79	
-1400	M40	1.400	1.350	35,56	34,29	3,61	5,51	7,48	10,15	13,36	15,40	19,23	
-1450	M45	1.450	1.400	36,83	35,56	3,71	5,66	7,67	10,41	13,68	15,76	19,67	
-1500	M50	1.500	1.450	38,10	36,83	3,81	5,81	7,87	10,66	14,00	16,12	20,12	
-1550	M55	1.550	1.500	39,37	38,10	3,90	5,95	8,06	10,92	14,32	16,47	20,56	
-1600	M60	1.600	1.550	40,64	39,37	4,00	6,10	8,26	11,17	14,65	16,83	21,00	
1) Not for new Design.													

Table 4: Dimensions and tolerances for 1st oversizes (continued)

Dimensions in inch (mm)										
Diameter Dash Number	Nominal Ø	ØA Theoretical Not for insp. purposes	ØA ₁ Min.	ØD	ØE Max.	G Ref.	H Ref.	L Ref.	R Max.	T Ref.
-5X	5/32 (4,0)	.332 .325 (8,43) (8,25)	.296 (7,52)	.1800 .1780 (4,572) (4,521)	.1796 (4,561)	.017 (0,43)	.039 (0,99)	.544 (13,82)	.030 (0,76)	.375 (9,52)
-6X	3/16 (4,8)	.385 .378 (9,78) (9,60)	.342 (8,69)	.2140 .2120 (5,436) (5,385)	.2141 (5,438)	.027 (0,68)		.605 (15,37)		
-8X	1/4 (6,4)	.507 .499 (12,88) (12,67)	.463 (11,76)	.2750 .2730 (6,985) (6,934)	.2751 (6,987)	.055 (1,40)		.758 (19,25)		

Table 4: Dimensions and tolerances for 1st oversizes (concluded)

Dimensions in inch (mm)						
Diameter Dash Number	Nominal Ø	Ø D1 Recm hole size ^{1) 2)}	Ø J Min. ²⁾	K Max. ²⁾	M Ref. ²⁾	N See sub-chapter 3.1.4 ²⁾
-5X	5/32 (4,0)	.183 .181 (4,65) (4,60)	.270 (6,86)	.325 (8,26)	.614 (15,59)	+.103 0 +(2,62) (0)
-6X	3/16 (4,8)	.218 .215 (5,54) (5,46)	.330 (8,38)	.350 (8,89)	.675 (17,14)	
-8X	1/4 (6,4)	.279 .276 (7,08) (7,01)	.420 (10,66)	.450 (11,43)	.828 (21,03)	

1) Only for information. Check Engineering applicable documentation.

2) Installation, see sub-chapter 3.1.2 to 3.1.5.

Table 5: Grips range and mass for 1st oversizes

Diameter Dash Number						-5X	-6X	-8X	
Nominal Diameter						inch	5/32	3/16	1/4
						mm	4,0	4,8	6,4
Grip Code No		Grip Range				Mass kg/1000 Parts (Ref)			
		inch		mm					
Old ¹⁾	New	Max	Min.	Max	Min.				
-100	-100	.100	.050	2,54	1,27	---	---	---	
-150	-150	.150	.100	3,81	2,54	1,41	2,18	4,44	
-200	-200	.200	.150	5,08	3,81	1,50	2,34	4,70	
-250	-250	.250	.200	6,35	5,08	1,60	2,49	4,96	
-300	-300	.300	.250	7,62	6,35	1,70	2,65	5,22	
-350	-350	.350	.300	8,89	7,62	1,80	2,80	5,49	
-400	-400	.400	.350	10,16	8,89	1,90	2,96	5,75	
-450	-450	.450	.400	11,43	10,16	2,01	3,11	6,01	
-500	-500	.500	.450	12,70	11,43	2,11	3,27	6,28	
-550	-550	.550	.500	13,97	12,70	2,21	3,42	6,54	
-600	-600	.600	.550	15,24	13,97	2,31	3,57	6,80	
-650	-650	.650	.600	16,51	15,24	2,40	3,72	7,06	
-700	-700	.700	.650	17,78	16,51	2,49	3,88	7,33	
-750	-750	.750	.700	19,05	17,78	2,59	4,03	7,59	
-800	-800	.800	.750	20,32	19,05	2,68	4,19	7,85	
-850	-850	.850	.800	21,59	20,32	2,78	4,34	8,11	
-900	-900	.900	.850	22,86	21,59	2,87	4,49	8,38	
-950	-950	.950	.900	24,13	22,86	2,97	4,65	8,64	
-1000	M00	1.000	.950	25,40	24,13	3,06	4,80	8,90	
-1050	M05	1.050	1.000	26,67	25,40	3,16	4,96	9,17	
-1100	M10	1.100	1.050	27,94	26,67	3,25	5,11	9,43	
-1150	M15	1.150	1.100	29,21	27,94	3,35	5,26	9,69	
-1200	M20	1.200	1.150	30,48	29,21	3,44	5,42	9,96	
-1250	M25	1.250	1.200	31,75	30,48	3,54	5,57	10,22	
-1300	M30	1.300	1.250	33,02	31,75	3,63	5,73	10,48	
-1350	M35	1.350	1.300	34,29	33,02	3,73	5,88	10,74	
-1400	M40	1.400	1.350	35,56	34,29	3,82	6,03	11,01	
-1450	M45	1.450	1.400	36,83	35,56	3,92	6,19	11,27	
-1500	M50	1.500	1.450	38,10	36,83	4,01	6,34	11,53	
-1550	M55	1.550	1.500	39,37	38,10	4,11	6,50	11,80	
-1600	M60	1.600	1.550	40,64	39,37	4,20	6,65	12,06	
1) Not for new Design.									

3.2 Material and surface treatment

The material and surface treatment shall be in accordance with table 6.

Table 6: Material and surface treatment

Material code	Item	Material	Heat treatment	Surface treatment ¹⁾
None	Nut	6Al-4V Titanium as per AMS6930, AMS4928 or AMS4967	Per AMS-H-81200, To 95 KSI (655 MPa) shear strength minimum. Maximum hydrogen 125ppm	Phosphate Fluoride as per AMS2486
	Screw	A-286 With chemical composition as per AMS5731, AMS5732 or AMS5737	To 175 KSI (1207 MPa) Tensile minimum	Passivate as per as per AMS2700 method 1, type 2, type 6, type 7 or type 8, or as per ASTM- A967-96, Nitric 1 treatment, nitric 3 or nitric 4
	Sleeve	304 Stainless steel as per AMS5639	Annealed	
	Insert	Acetal as per ASTM D4181	---	None
	Drive Nut (Code "Z")	Mild steel	As required for performance	Light grey corrosion protective coating
	Cap Nut / Drive Nut (Robotic version – Code "A")	Mild steel	As required for performance	Black Oxide

(continued)

Table 6: Material and surface treatment (concluded)

Material code	Item	Material	Heat treatment	Surface treatment ¹⁾
A	Nut	6Al-4V Titanium as per AMS6930, AMS4928 or AMS4967	Per AMS-H-81200, To 95 KSI (655 MPa) shear strength minimum. Maximum hydrogen 125ppm	IVD Aluminium coat as per MIL-C-83488, Class 3, Type II
	Screw	A-286 With chemical composition as per AMS5731, AMS5732 or AMS5737	To 175 KSI (1207 MPa) Tensile minimum	Passivate as per as per AMS2700 method 1, type 2, type 6, type 7 or type 8, or as per ASTM-A967-96, Nitric 1 treatment, nitric 3 or nitric 4
	Sleeve	304 Stainless steel as per AMS5639	Annealed	
	Insert	Acetal as per ASTM D4181	---	None
	Drive Nut (Code "Z")	Mild steel	As required for performance	Light grey corrosion protective coating
	Cap Nut / Drive Nut (Robotic version - Code "A")	Mild steel	As required for performance	Black Oxide
1) Following lubricants may be applied to each one of the components by the fastener manufacturer, as required for performance (no other being allowed). – Nut: Cetyl Alcohol per AS87132. – Screw and Sleeve: Dry film lube per AS5272 (Type I), Everlube 812, or Cetyl Alcohol per AS87132.				

3.3 Mechanical properties


The mechanical properties shall be in accordance with table 7

Table 7: Mechanical properties

Diameter Dash No	Locking Torque (Min)		Double Shear Strength (Min)		Tensile Strength (Min)	
	In-lb	Nm	lb	daN	lb	daN
-5	1.0	0,11	3150	1401	900	400
-5X			3780	1681		
-6	1.5	0,17	4600	2046	1400	623
-6X			5350	2380		
-7	2.0	0,23	6050	2691	1600	712
-8	2.5	0,28	7900	3514	2100	934
-8X			8850	3937		
-9	3.0	0,34	9800	4359	2600	1157
-10	3.5	0,40	11350	5048	3600	1601
-11	4.0	0,45	13850	6161	4400	1957

4 Designation

This type of standard shall be designated according to the philosophy of the following examples:

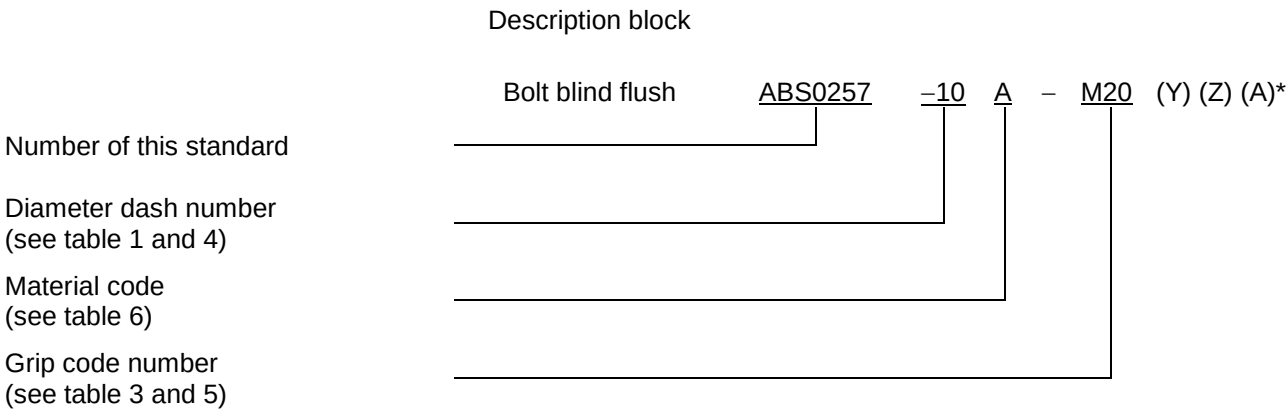

- * Due to the different tooling available the letters “Y”, “Z”, and “A” are reserved for the sole use of Manufacturing Engineering and Procurement Departments for selecting and ordering purposes, according to:
- “Y”: Fasteners without “drive nut”.
 - “Z”: Fasteners with “drive nut”.
 - “A”: Fasteners for robotic installation.

However due to standardization of tooling the only parts that are valid for drawing call up as of 1st August 2014 are ‘A’ code for robotic installation and ‘Z’ code fasteners for manual installation.

5 Marking

EN2424, style A

6 Technical specification

MBF2000 or FCBF200 (depending on supplier).
Or ABS2320 Type 1, Style C, Class 1, Code A, Subclass 1.

7 Example of installation

Not applicable.

RECORD OF REVISIONS

Issue	Clause modified	Description of modification
6 03/04	N/A	Rewritten in new format.
7 11/04	3.2 (note), and Figure 1	Removal of paraffin wax lubricant. Addition of "Procurement code (Y)".
8 08/06	3.1, Table-1, and Figure 3	Introduction of version for robotic installation (code "A").
9 09/07	Tables 2 to 4	Introduction of diameter dash (-9). Modification of Item "Drive Nut and Cap Nut" in Table 3 (Material and surface treatment). Correction of double shear value for diameter dash (-7).
10 04/08	Tables 1, 2 & 4 Figure 3 Table 1A	Introduction of diameters dash (-10) and (-11). Modification of Figure 3 (Robotic Version) Introduction of Table 1A (Dimensions for Robotic Version)
11 08/10	Tables 4 & 5	Introduction of 1 st oversizes for dash (-5), (-6) and (-8) Correction of "G" value for dash (-6) Correction of "recommended hole" value for dash (-9) Correction of "M" value for all sizes Suppression of manufacturers installation documents
12 02/11	Tables 3 & 5 Table 2 Table 4 Tables 1 & 4	Correction of max grip in mm for grip codes (-600) and (-1600). Correction of min grip in mm for grip code (-650). Modification of Max "r" values Correction of "Ø D ₁ recom. hole size" min value in mm for dia. dash (-5X) and min value in inches for dia. dash (-8X). Ø P csk removed from figures -1, -2 and -3 and tables -1 & -4 (because same dimension as Ø A)

Issue	Clause modified	Description of modification
13 07/14	General	The contents have been adapted to the current template. All the contents have been revised according to the M20060.4.5 rules.
	2	Normative references have been updated and its corresponding footnotes added. Old references have been replaced by the new ones: AMS-T-9047 has been replaced by AMS6930; AST A967 by AMS2700; MIL-L-46010 by AS5272; FCB200 by FCBF200; and FCB 203 and MBF2001 by MBF2003. AMS2486 has been added.
	3.1.5	Installation and inspection specifications MBF2001 and FCB203 from previous issue have been replaced by MBF2003.
	Figure 1 to 3	Reference to "Procurement code (Y)", "Procurement code (Z)" and "Procurement code (A)" have been replaced by "Code Y", "Code Z" and "Code A".
	Table 2	Concentricity for diameter dash number -6 and -8 have been changed from .027 inches and .022 inches. to .030. Dimensions for diameter dash number -7 and -9 have been added.
	Table 3 and 5	Old Grip Codes No from 1000 to 1600 have been replaced by new ones M00 to M60 respectively. Footnote 1) has been added.
	Table 6	Normative references have been updated and footnote 2) has been added.
	4	Designation has been updated according to new Grip Code No.
14 10/18	7	Chapter has been added according to the current template.
	2 and 6	ABS2320 added