



ABS5319

Issue 2

Page 1 of 5

March 2008

Aerospace series

**Structural epoxy
Adhesive film for composite bonding
(120°C performance), 180°C cure**

When this standard is applied, a careful check must be made as to whether any protective rights exist. This standard issuer hereby disclaims any liability for infringement of patent or design rights resulting from the use of this standard.

**Published and distributed by :
AIRBUS S.A.S.
ENGINEERING DIRECTORATE
31707 BLAGNAC Cedex
FRANCE**

Contents

- 1 Scope
- 2 Normative references
- 3 Requirements
- 4 Designation
- 5 Marking
- 6 Technical specification

1 Scope

This standard specifies the characteristics of structural epoxy adhesives for composite bonding, supplied in the form of a film supported by a carrier, curing at 180°C.

2 Normative references

This Airbus Standard incorporates by dated or undated reference provisions from other publications. All normative references cited at the appropriate places in the text are listed hereafter. For dated references, subsequent amendments to or revisions of any these publications apply to this Airbus Standard only when incorporated in it by amendment of revision. For undated references, the latest issue of the publication referred to shall be applied.

AIMS 10-01-000 Part 1	Airbus Material Specification – Structural adhesive systems; General requirements –Technical Specification
AIMS 10-01-000 Part 3	Airbus Material Specification – Structural adhesive systems – Qualification program/batch release testing. Film for composite bonding. –Technical Specification
AIMS 10-01-005	Airbus Material Specification – Structural adhesive system – Film epoxy, for composite bonding (120°C performance), 180°C cure. – Material Specification

3 Requirements

3.1 Material, dimensions, tolerances and mass

The material, dimensions, tolerances and mass shall conform with Table 1.

Table 1: Material, mass and dimensions

Material Code ⁽¹⁾	Material	Adhesive Grade	Mass per unit area	Width ⁽²⁾	Nominal uncured thickness
			(g/m ²)	(mm)	(mm)
A	AIMS 10-01-005 A	A	150 ± 25	≈ 914	0.13 ± 0.02
B	AIMS 10-01-005 B	B	250 ± 25		0.20 ± 0.02
C	AIMS 10-01-005 C	C	300 ± 25		0.25 ± 0.02
Notes:					
1) For previous designation see table 3					
2) Other sizes may be ordered per agreement (tol. +5%)					
Note: Delivery length could be found in general MS or IPS if necessary.					

3.2 Carrier

The carrier shall conform with table 2.

Table 2: Carrier type

Carrier Code	Carrier type
M	Polyester mat (non woven)
K	Polyamide or Polyester knit
N ¹⁾	Carrier type not defined
Notes:	
1) If IPS number is not specified, it is allowed not to write this code.	

Table 3: Codes equivalence (Previous codes)


Column 1 will be applicable designation for drawing. In case that different drawing designation has been already used, column block 2 provide information of cross references applicable.	
Column 1	Column block 2 (previous designation)
ABS5319AM	ABS5319AA1
ABS5319AK	ABS5319AA2
ABS5319BM	ABS5319AB1
ABS5319BK	ABS5319AB2

3.3 Material

-55°C up to 120°C

4 Designation

This type of standard shall be designated according to the philosophy of the following example:

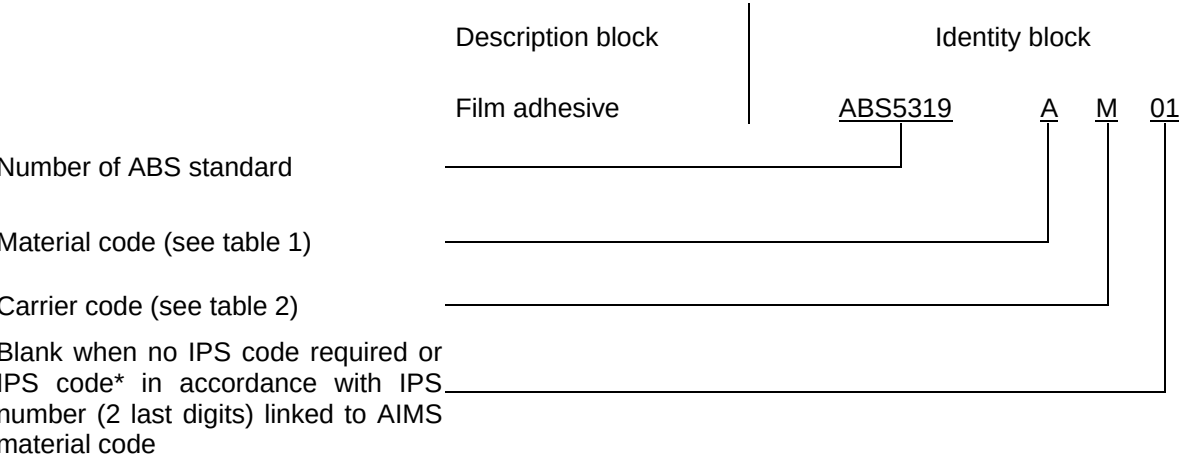

*Note: Designation with IPS code when required by the design

5 Marking

In accordance with AIMS 10-01-000 Part 1

6 Technical specification

In accordance with AIMS 10-01-000 Part 1 and AIMS 10-01-000 Part 3

RECORD OF REVISIONS

Issue	Clause modified	Description of modification
1 03/00		New Standard
2 03/08	5	Introduction of code designation for IPS number and codification changed