



ABS5341

Issue 2

Page 1 of 6

June 2004

**Honeycomb cores, N-636 Polyamide paper
(meta and para-aramid),
phenolic resin impregnated/ Hexagonal**

**Published and distributed by :
AIRBUS S.A.S.
ENGINEERING DIRECTORATE
31707 BLAGNAC Cedex
FRANCE**

Contents

- 1 Scope
- 2 Normative references
- 3 Requirements
- 4 Designation
- 5 Technical specification

1 Scope

This standard specifies the required characteristics of honeycomb cores made of N-636 polyamide paper (meta and para-aramid) impregnated with phenolic resin in hexagonal configuration in a cured state for light-weight sandwich components..

2 Normative references

This Airbus Standard incorporates by dated or undated reference provisions from other publications. All normative references cited at the appropriate places in the text are listed hereafter. For dated references, subsequent amendments to or revisions of any these publications apply to this Airbus Standard only when incorporated in it by amendment of revision. For undated references, the latest issue of the publication referred to shall be applied.

AIMS 11-01-000 Part 1	Honeycomb cores, phenolic resin impregnated – Part 1, General requirements. Technical Specification.
AIMS 11-01-000 Part 2	Honeycomb cores, phenolic resin impregnated – Part 2, Qualification program/ Batch release testing - Polyamide Paper/ Hexagonal/ Over-expanded/ Flexible. Technical Specification.
AIMS 11-01-004	Honeycomb cores, N-636 Polyamide paper (meta and para-aramid). Phenolic resin impregnated/ Hexagonal. Material Specification.

3 Requirements

3.1 Configuration, dimensions, tolerances and mass

The configuration, dimensions, tolerances and mass shall conform with Figure 1 and Table 1.

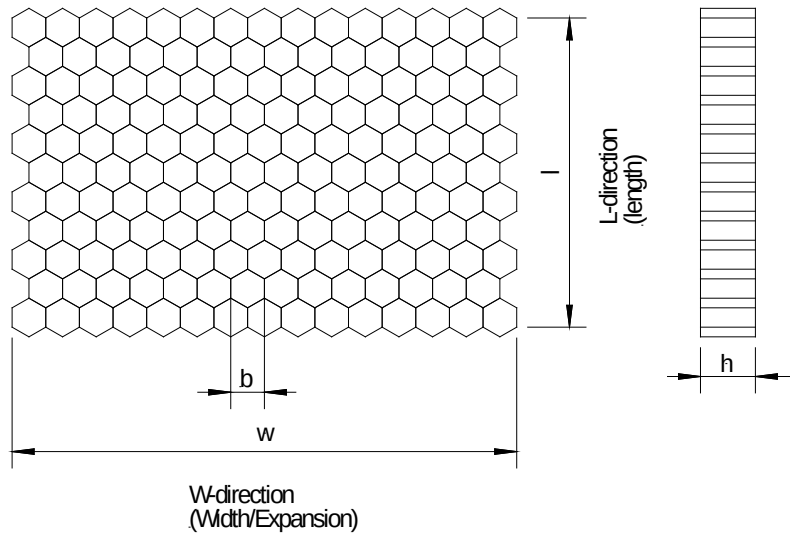


Figure 1: Configuration

3.2 Individual product code, Corresponding to IPS11-01-004-XX

See table 2

Table 1 : Code for IPS

Code	IPS corresponding to	
without	1)	
A	IPS11-01-004-	01
B		02
C		03
D		04
E		05
F		06
G		07
1) Manufacturing choice into the qualified IPS.		


Table 2 : Dimensions, tolerances and mass

Dimensions in mm

Material code	Material	Density		Cell size	Length	Width	Height
		kg/m ³		b	l ¹⁾	w ¹⁾	
				± 10%	± 50 ²⁾	± 75 ²⁾	Max. variation
A0	AIMS11-01-004A	28	±10%	4,8	1120	2440	3,0 to 400,0 < 50 ± 0,13 ≥ 50 ≤ 100 ± 0,25 > 100 +3/- 0
A1	AIMS11-01-004B	32		4,8			
A2	AIMS11-01-004C	37		4,8			
A3	AIMS11-01-004D	40		3,2			
A5	AIMS11-01-004F	48		3,2			
A6	AIMS11-01-004G	48		4,8			
A9	AIMS11-01-004L	64		3,2			
C1	AIMS11-01-004P	72		4,0	1120 x 2440 or 1970 x 2950		
C5	AIMS11-01-004T	96		3,2			
C8	AIMS11-01-004W	96		4,0			
C6	AIMS11-01-004U	96		4,0			
C7	AIMS11-01-004Y	40			9,6	1120	
1) Other widths or lengths to be agreed 2) Smaller tolerances to be agreed							

4 Designation

This type of Standard shall be designated according to the philosophy of the following example:

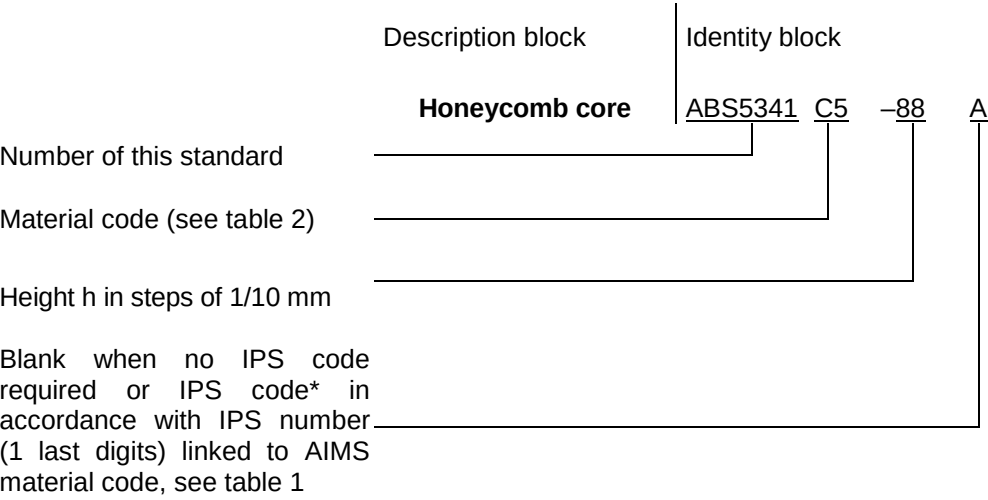

Designation for delivery:

Honeycomb core AIMS 11-01-004T, Height h=8.8, L-Direction l= 1120, W-Direction w=2440
Honeycomb core ABS 5341C5 – 8.8 x 1120 x 2440 (-0+30) ¹⁾

5 Technical specification

AIMS 11-01-000 Part 1 and AIMS 11-01-000 Part 2.

¹⁾ Applicable in case of different tolerances from Table

RECORD OF REVISIONS

Issue	Clause modified	Description of modification
1 06/02		New Standard
2 05/04	3	New material code C8 for material AIMS11-01-004W included