


USB-C, ESD, fuse, Schottky, VBUS bleed

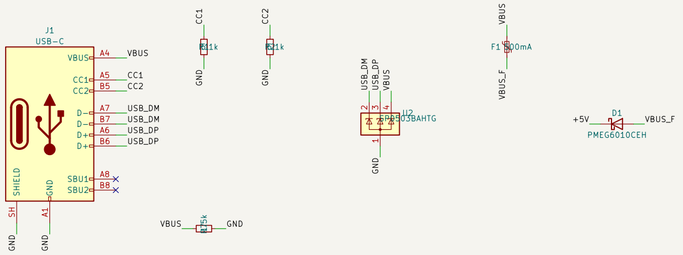


3.3 V LDO with soft start (DS Table 2.14), power LED

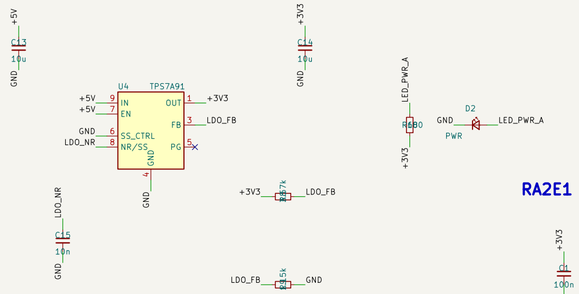


RA2E1 supplies, VCL, AVCC0 filter




Uno R3 shield headers

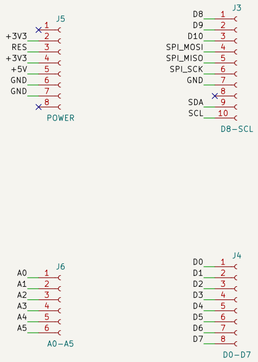

R7FA2E1A92DFM

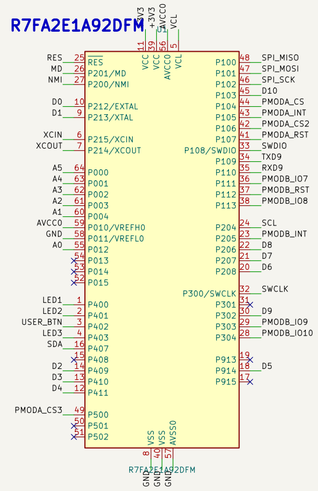


32.768 kHz sub-clock (R01AN7202 Table 4.2.7)




Pmod host ports




USB-UART: CP2102N on SCI9 (SCI boot port)

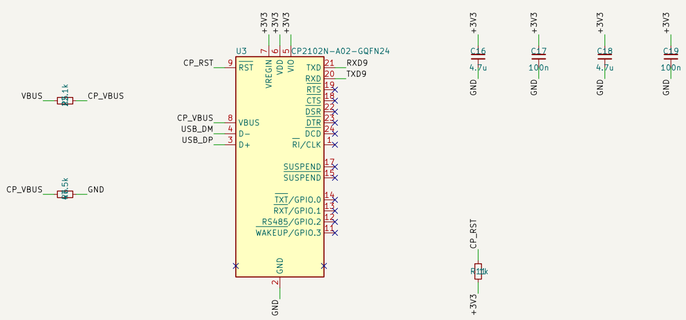


Power nets




User button, user LEDs

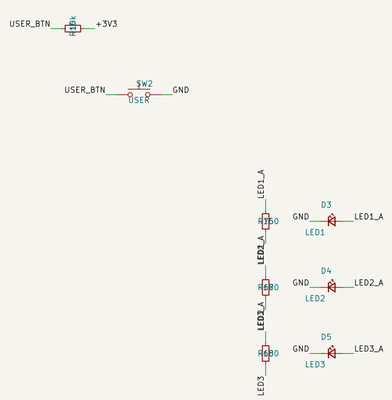


Reset, MD jumper, NMI, SWD

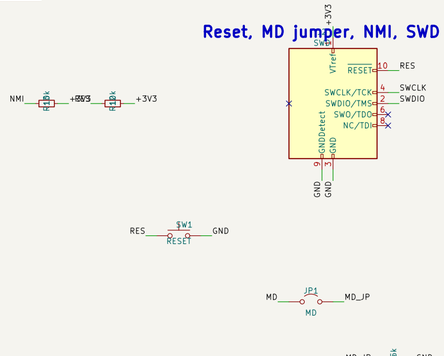

Mounting holes



I2C pull-ups (jumpered)



Uno R3 mounting holes (4 x 3.20 mm at 15.24 / 2.54 / 66.04 / 17.78 / 45.72 / 50.80 mm) and p
Uno R3 outline (2700 x 2100 mil) and shield header positions: Matthew Beckler, "Arduino Uno R3" di
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /
File: eos-ra2e1-board.kicad_sch

Title: EoS RA2E1 Board

Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1