


USB-C, ESD, CC, fuse




LiPo charger (MCP73831) and load sharing (AN1149)

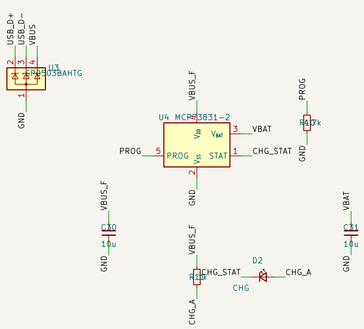


3.3 V regulator, Feather EN

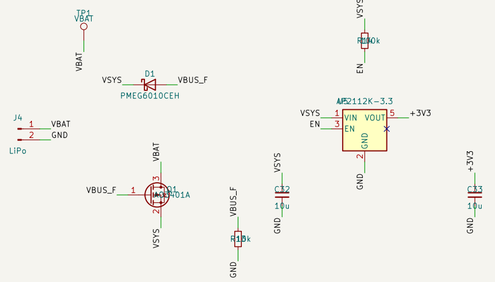


QSPI flash, BOOTSEL

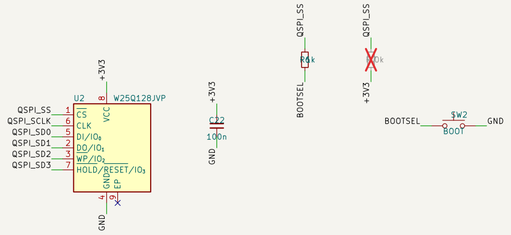


12 MHz crystal (ABM8-272-T3)




Buttons







Feather headers (male, on the back)




USB termination




RP2040

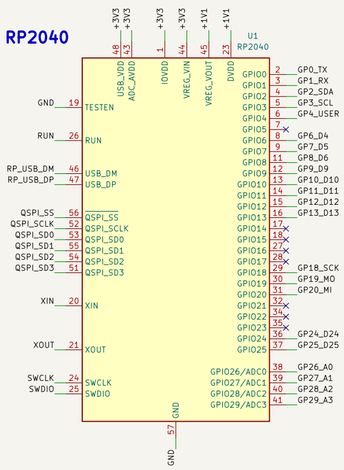

Core regulator and decoupling

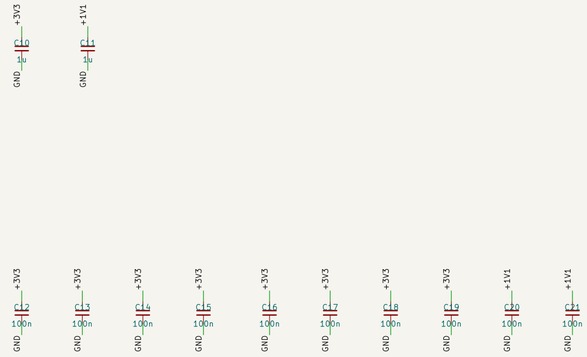

D13 LED




SWD and STEMMA QT



Power nets



Mounting holes



EoS Feather RP2040, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Outline, holes and headers from Adafruit's Feather Specification; signals from the Feather RP2040 pinout.
Values: RP2040 datasheet and Hardware design with RP2040: MCP73831 DS20001984H; AN1149:
AP2112 DS39724; W25Q128JV Rev. F; SP05xBA: 0805L: A03401A; PMEG6010CEH: Kingbright; Omron B3U.
R7 (QSPI_SS pull-up) is not fitted. GPIO4 (user button) needs its internal pull-up in firmware.

Header signal assignment, user button on GPIO4 and battery polarity: facts from Adafruit's published
Feather outline, corner holes, header positions and pin order: facts from Adafruit's Feather Specificati
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /
File: eos-feather-rp2040.kicad_sch

Title: EoS Feather RP2040

Size: A2	Date: 2026-10-22	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1