


J1: USB-C, COM port and power

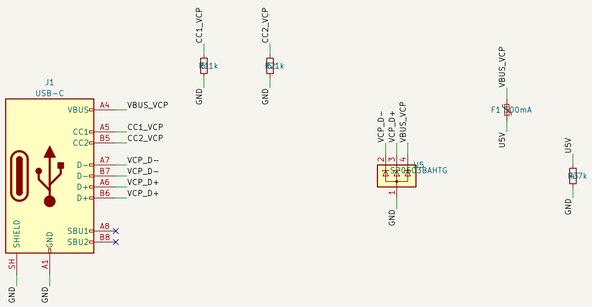


5 V rail: J1, J2, E5V, VIN (buck), ORed

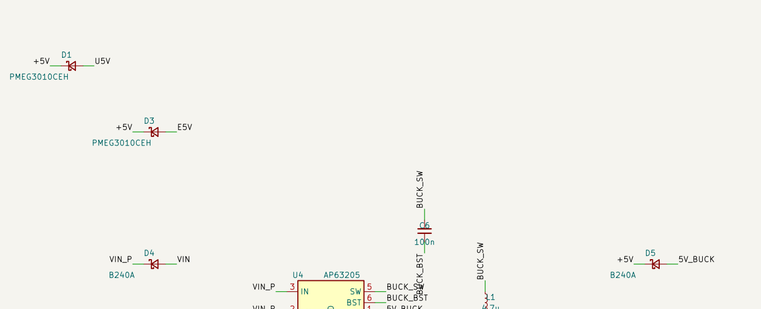


J2: USB-C to the STM32 USB OTG FS

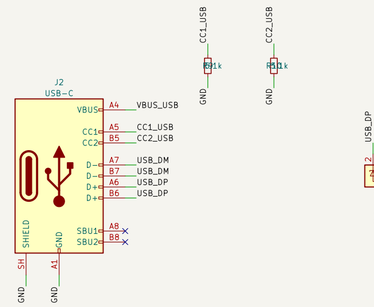


Debug connector, buttons, user LED

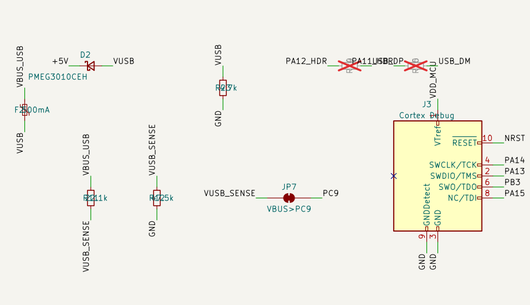


CP2102N USB-UART on 3.3 V, VBUS-sensing J1

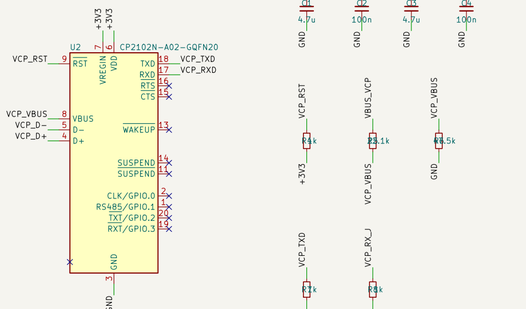

3.3 V LDO, power LED, IDD jumper




HSE 8 MHz, LSE 32.768 kHz

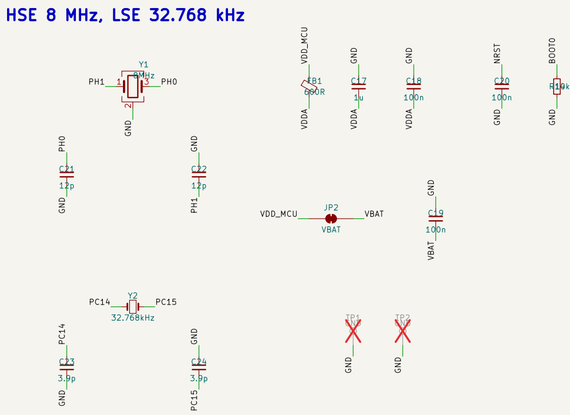


STM32F411RET6


VDD, VCAP, VDDA, VBAT, NRST, BOOT, PA10

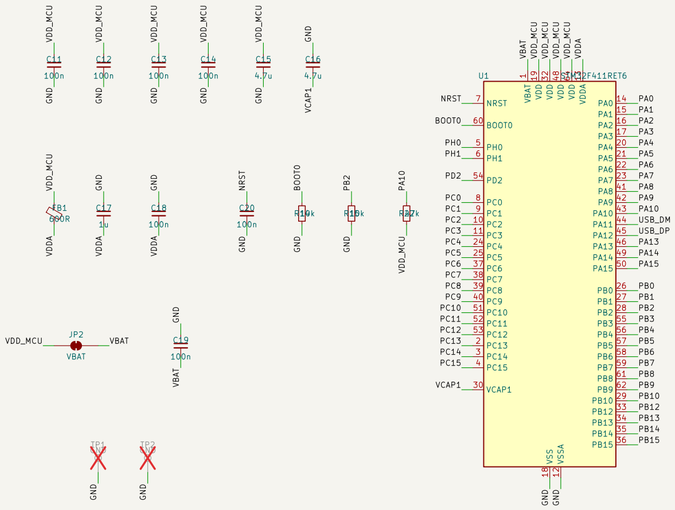

ST morpho (UM1724 Table 29)

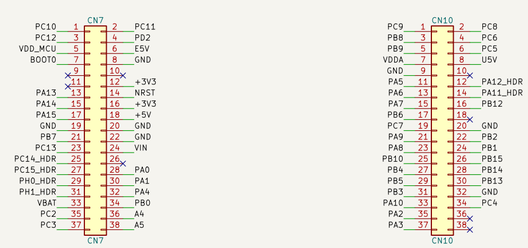

Arduino Uno V3 (UM1724 Table 16)

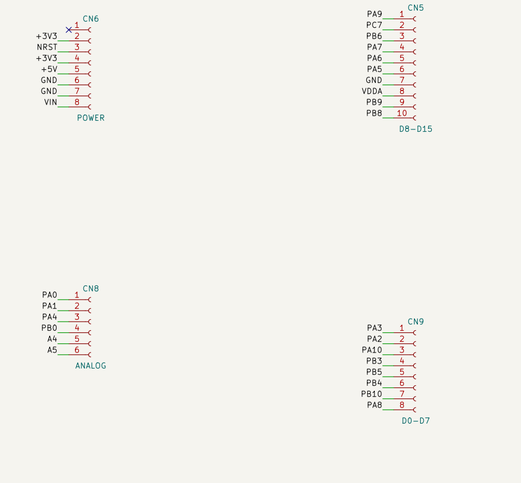

Power nets

Mounting holes



EoS STM32 64, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved: see LICENSE.txt.
Values from ST DS10314 Rev 8, RM0383 Rev 3, AN4488 Rev 7, AN2867 Rev 24, AN2606 Rev 70;
Silicon Labs CP2102N Rev. 1.5; Diodes DS37274, DS41326, DS13004; Nexperia PMEG3010CEH;
Littelfuse SP05xx8A; Bourns SRP5030T; ECS ECX-53B; Abracon ABS07-120; TDK MMZ1608; Kingbright.
Firmware: HSE 8 MHz crystal (not bypass); LSE high drive (LSEMOD = 1);
USB: J2's VBUS on PC9 (JP7); keep the D+ pull-up off (SDIS) while PC9 is low.
BOOT0: hold B3, press B2 (DFU). RDP Level 2 locks out SWD and DFU for good.
IDD: cut JP1, ammeter across J4. JP8/JP9 cut: D0/D1 free of the COM port.

Arduino and ST morpho header signal assignment for NUCLEO-F411RE: STMicroelectronics LM1724 Rev 8
Nucleo-64 outline (70.00 x 82.50 mm). Arduino and ST morpho header positions and mounting holes:
Generated by tools/pos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /
File: eos-stm32-64.kicad_sch

Title: EoS STM32 64

Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1