

BLE Mesh based IR AC Controller Software Design Document

Apr 01, 2024

Table of Contents

1. Introduction	5
2. Purpose of Document	5
3. Product Brief	5
4. Software Architecture	5
4.1 Basic processes and Terminologies	6
4.1.1 Central Server	6
4.1.2 Gateway	6
4.1.3 Registration	6
4.1.4 Unregistration	6
4.1.5 Node	6
4.1.6 Provisioning	6
4.1.7 Unprovisioning	6
4.1.8 MQTT Publishing	6
4.1.9 MQTT Subscribing	6
4.2 Gateway LED Indications	7
4.3 Node LED Indications	7
4.4 MQTT Communication Packets	8
4.4.1 Error codes	9
4.4.2 Common JSON parameters	11
4.4.3 Gateway Registration Packet	12
4.4.4 Gateway Registration Ack	13
4.4.5 Gateway AC Remote Configuration Ack	14
4.4.6 Gateway Unregistration Packet	15
4.4.7 Gateway Unregistration Ack	16
4.4.8 Gateway AC Control Packet	17
4.4.9 Gateway AC Control Ack	19
4.4.10 Gateway AC manual control Ack	20
4.4.11 Gateway AC Remote Reconfiguration Packet	21
4.4.12 Gateway AC Remote Reconfiguration Ack	22
4.4.13 Gateway Temperature Data Ack	23
4.4.14 Gateway Temperature Publish configuration Packet	24
4.4.15 Gateway Temperature Publish configuration Ack	25
4.4.16 Gateway Reset MQTT Packet	26
4.4.17 Gateway Reset MQTT Ack	27
4.4.18 Node Provision Packet	28
4.4.19 Node Provision Ack	29
4.4.20 Node AC Remote Configuration Ack	30
4.4.21 Node Unprovision Packet	31
4.4.22 Node Unprovision Ack	32
4.4.23 Node AC Control Packet	33
4.4.24 Node AC Control Ack	35
4.4.25 Node AC manual control Ack	36
4.4.26 Node AC Remote Reconfiguration Packet	37
4.4.27 Node AC Remote Reconfiguration Ack	38
4.4.28 Node Temperature Data Ack	39
4.4.29 Node Temperature Publish Configuration Packet	40
4.4.30 Node Temperature Publish Configuration Ack	41

Table of Figures

Figure 4.1 Software Architecture Block Diagram	5
Figure 4.2 Gateway Registration process flow	12
Figure 4.3 Gateway Registration process flow	13
Figure 4.4 Gateway Configuration process flow	14
Figure 4.5 Gateway Unregistration Process flow	15
Figure 4.6 Gateway Unregistration Process Flow.....	16
Figure 4.7 Gateway AC Control Process flow	18
Figure 4.8 Gateway AC Control Process flow	19
Figure 4.9 Gateway AC manual control Process flow.....	20
Figure 4.10 Gateway AC Remote Reconfiguration Process Flow	21
Figure 4.11 Gateway AC Remote Reconfiguration Process flow.....	22
Figure 4.12 Gateway Temperature Data Process flow.....	23
Figure 4.13 Gateway Publish Configuration Process flow.....	24
Figure 4.14 Gateway Publish Configuration Process flow.....	25
Figure 4.16 Gateway Reset MQTT Process flow.....	26
Figure 4.17 Gateway Reset MQTT Process flow.....	27
Figure 4.18 Node Provisioning Process flow	28
Figure 4.19 Node Provisioning Process flow	29
Figure 4.20 Node Configuration Process flow	30
Figure 4.21 Node Unprovisioning Process flow.....	31
Figure 4.22 Node Unprovisioning Process flow.....	32
Figure 4.23 Node AC Control Process flow.....	34
Figure 4.24 Node AC Locking Process flow.....	36
Figure 4.25 Node Reconfiguration Process flow	37
Figure 4.26 Node Reconfiguration Process flow	38
Figure 4.27 Node Temperature Data Process flow	39
Figure 4.28 Node Publish Configuration process flow	40
Figure 4.29 Node Publish Configuration process flow	41

Revision History

Version	Release Date	Prepared by	Remarks
0.1	01.04.2024	Kulasekaran	

Acronyms and Abbreviations

MQTT	Message Queuing Telemetry Transport
BLE	Bluetooth Low Energy
UART	Universal Asynchronous Receiver / Transmitter
LTE	Long-term evolution (4G)
GWY	Gateway
IR	Infrared
ACK	Acknowledgement

1. Introduction

Unimation Robotics intends to develop a Bluetooth Mesh based system to control Air conditioners remotely. QMAX Systems India Pvt. Ltd. an Electronics Engineering and R&D Services Company will design, develop, test, and deliver prototypes matching the requirements for Unimation Robotics.

2. Purpose of Document

The purpose of this document is to describe the Software design details of the product being developed by QMAX Systems India Pvt. Ltd. for Unimation Robotics.

3. Product Brief

The overall product mainly focuses on building a BLE Mesh based system consisting of two types of devices: 1. Gateway 2. Node. Both the devices are capable of controlling Air conditioners by transmitting IR signals using the IR transmitter on-board. Also both the devices are capable of detecting IR signals using the IR receiver on-board. Adding to that, both the devices have temperature sensors on-board, that help in tracking the ambient temperature and do logical operation based on requirement. Gateway is master type device and Node is a slave type device. Gateways receive commands from cloud and perform necessary operation or relay them to the appropriate node to perform the necessary task. Nodes after performing the task will relay back acknowledgement to Gateway, which will be relayed back to Cloud.

4. Software Architecture

The following image represents the Software architecture of the whole system and how the devices communicate with each other.

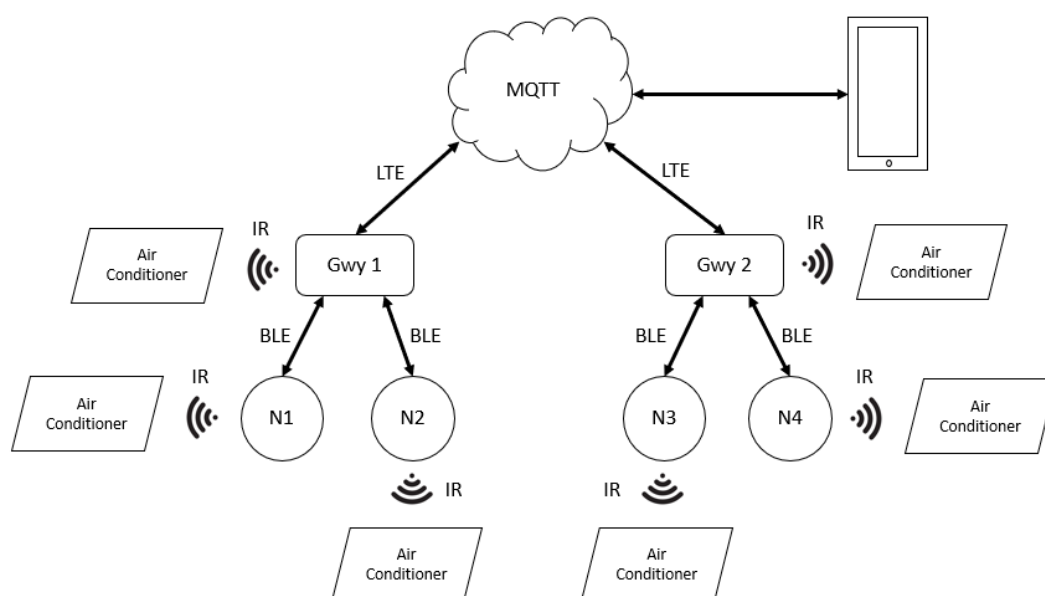


Figure 4.1 Software Architecture Block Diagram

4.1 Basic processes and Terminologies

BLE Mesh based systems involve a few initial steps to be followed in order to add/remove devices into/from the network. The following section provides information regarding what those steps/processes are.

4.1.1 Central Server

Central server is the place from where the entire system receives commands and sends ACKs.

4.1.2 Gateway

Gateway is a type of device in the BLE Mesh network which act as a mediator between the slave devices (Nodes) and the central server. Each Gateway is identified the BLE Mesh network by their unique serial number.

4.1.3 Registration

Registration is the process of adding a Gateway device into the BLE Mesh network.

4.1.4 Unregistration

Unregistration is the process of removing a Gateway device from the BLE Mesh network.

4.1.5 Node

Node is a type of device in the BLE Mesh network which act as slaves. Typically, Nodes on a BLE Mesh network don't communicate with the Central Server directly. They will communicate via Gateway to the Central Server.

4.1.6 Provisioning

Provisioning is the process of adding a Node device into the BLE Mesh network.

4.1.7 Unprovisioning

Unprovisioning is the process of removing a Node device from the BLE Mesh network.

4.1.8 MQTT Publishing

In MQTT, publishing is the concept of sending data to a specific topic. Topics are like channels in MQTT. There can be any number of topics and all topics are unique. Devices that have subscribed to the topic will receive data from that topic.

4.1.9 MQTT Subscribing

In MQTT, Subscribing is the concept of listening for data from a specific topic.

4.2 Gateway LED Indications

Table 4.1 Gateway LED Indication

Sl.No	Pattern	Description
1	Toggle Red + Green + Blue	Gateway is in MQTT configuration mode.
2	Solid Red	Gateway is not connected with MQTT server.
3	Blinking Red + Blue	Gateway is not registered.
4	Slow Blinking Blue (500ms ON 500ms OFF)	Gateway is in AC remote configuration mode.
5	Fast Blinking Blue (200ms ON 200ms OFF)	Gateway is in Teaching mode.
6	Solid Green	Gateway is connected with MQTT, Registered and Configured. Meaning, the Gateway is fully operational.

4.3 Node LED Indications

Table 4.2 Node LED Indication

Sl.No	Parameter	Description
1	Blinking Red + Blue	Node is not Provisioned.
2	Slow Blinking Blue (500ms ON 500ms OFF)	Node is in AC remote configuration mode.
3	Fast Blinking Blue (200ms ON 200ms OFF)	Node is in Teaching mode.
4	Solid Green	Node is provisioned and configured. Meaning, the node is fully operational.

4.4 MQTT Communication Packets

The communication between Gateway and MQTT cloud is based on JSON packets. The communication can take place in both directions i.e., from the gateway to the cloud and vice-versa.

Note: If a packet name has “Ack” at its end, then it means, the origin of the packet is from the device’s side. All other packets, have origin from the Cloud end.

Table 4.3 MQTT Communication Packets

Packet Name	Packet ID	Packet Description
GATEWAY MQTT PACKETS		
Gateway Registration	0	Adds a Gwy into BLE Mesh network
Gateway AC Remote Configuration Ack	1	Sent back as ACK to cloud. Contains information about Gateway AC remote configuration
Gateway Unregistration	2	Removes a Gwy from BLE Mesh network
Gateway AC Control	3	Contains AC control settings to control AC using Gwy
Gateway AC manual control Ack	4	Sent back as ACK to cloud. Contains information about manual control of AC using remote
Gateway AC Remote Reconfiguration	5	Puts Gwy into AC remote configuration mode
Gateway Temperature data Ack	6	Sent back as ACK to cloud. Contains ambient temperature value measured by the on-board Temperature sensor on Gwy. This data acts as a Heartbeat as well.
Gateway Temperature Publish configuration	7	Tells the Gwy, how frequently it needs to send the Temperature data ACK to cloud
Gateway Reset MQTT	8	Disconnects Gateway from MQTT network. Resets MQTT parameters in Gwy and puts the Gwy into MQTT configuration mode.
NODE MQTT PACKETS		
Node Provisioning	100	Adds a Node into BLE Mesh network
Node AC Remote Configuration Ack	101	Sent back as ACK to cloud. Contains information about Node AC remote configuration
Node Unprovisioning	102	Removes a Node from BLE Mesh network
Node AC control	103	Contains AC control settings to control AC using Node
Node AC manual control Ack	104	Sent back as ACK to cloud. Contains information about manual control of AC using remote
Node AC Remote Reconfiguration	105	Puts Node into Configuration mode

Node Temperature data Ack	106	Sent back as ACK to cloud. Contains ambient temperature value measured by the on-board Temperature sensor on Node
Node Temperature Publish configuration	107	Tells the Node, how frequently it needs to send the Temperature data ACK to Gwy

4.4.1 Error codes

Below table contains all the error codes used across the application and what they mean.

Table 4.4 Error Codes

Error code	Error code name	Description / Use Case
GENERAL		
-1	FAILURE	Operation has failed
0	SUCCESS	Operation has succeeded
1	INVALID_JSON_PACKET_ID	Unknown JSON Packet ID
2	INVALID_MSG_SEQ_NO	Invalid Msg Sequence No
3	INVALID_GWY_SER_NO	Invalid Gwy Serial No
4	INVALID_NODE_SER_NO	Invalid Node Serial No
5	INVALID_LOCATION_STR	Invalid Location
6	NODE_COMM_TIMEOUT	Gwy has failed to connect with Node
GWY REG & UNREG		
100	GWY_ALREADY_REG	User is trying to register a Gwy that is already registered
101	GWY_ALREADY_UNREG	User is trying to Unregister a Gwy that is not yet registered
NODE PROV & UNPROV		
200	NODE_ALREADY_PROV	User is trying to provision a node that is already provisioned
201	NODE_ALREADY_UNPROV	User is trying to Unprovision a node that is already provisioned
CONFIG & RECONFIG		

300	GWY_ALREADY_AC_REMOTE_UNCONF	User is trying to unconfigure a Gwy that has not been configured
301	NODE_ALREADY_AC_REMOTE_UNCONF	User trying to unconfigure a Node that has not been configured
AC CONTROL		
400	GWY_NOT_REG	User is trying to control AC with a Gwy that has not been registered
401	GWY_NOT_AC_REMOTE_CONF	User is trying to control AC with a Gwy that has not been AC remote configured
402	INVALID_POWER	Invalid Power
403	INVALID_MODE	Invalid Mode
404	INVALID_FAN_SPEED	Invalid Fan speed
405	INVALID_TEMPERATURE	Invalid Temperature
406	INVALID_SWING_H	Invalid Horizontal Swing
407	INVALID_SWING_V	Invalid Vertical Swing
408	INVALID_ONTIMER	Invalid On timer
409	INVALID_OFFTIMER	Invalid Off timer
410	INVALID_LOCKING	Invalid Locking
411	INVALID_TEMP_UPPER_LIMIT	Invalid Upper Temperature limit
412	INVALID_TEMP_LOWER_LIMIT	Invalid Lower Temperature limit
413	LOCKING_TEMP_UP_LIMIT_EXCEEDING_TEMP_UP_LIMIT	User set locking temperature up limit is more than the the absolute temperature up limit
414	LOCKING_TEMP_LOW_LIMIT_EXCEEDIGN_TEMP_LOW_LIMIT	User set locking temperature low limit is lower than the absolute temperature low limit
415	ILLOGICAL_LOCKING_TEMP_LIMIT	TempLockUpLimit is lower than TempLockLowLimit
416	EXCEEDING_TEMP_LOWER_LIMIT	User set temperature value is exceeding the

		absolute temperature low limit.
417	EXCEEDING_TEMP_UPPER_LIMIT	User set temperature value is exceeding the absolute temperature up limit
HEARTBEAT		
500	INVALID_PUBLISH_PERIOD	
MISCELLANEOUS		
999	UNKNOWN_ERROR	

4.4.2 Common JSON parameters

The following parameters are used across most of the MQTT communication packets. Below table provides information about these parameters and the purpose behind it.

Table 4.5 Common JSON Parameter description

Sl.No	Parameter	Description
1	JsonPacketId	This is used for identification on both cloud side and Gwy side to know which packet is being received
2	MsgSeqNo	The message sequence number is used to identify which ACK corresponds to which command.
3	GwySerNo	Which Gateway device, the command is intended for
4	Error Code	Included on all ACK packets. Lets the cloud know if the operation has succeeded or needs attention.
5	Location	This is used to identify the physical location of where the device was installed. User sets this information upon Registration / Provision process.

4.4.3 Gateway Registration Packet

Description : This packet is used to add a Gwy device into the BLE Mesh network.

LED Indication: If Unregistered, Gateway blinks RED + BLUE.

Gateway Registration JSON (Cloud to Gateway):

		Range
{		
"JsonPacketId"	: 0 // (Number)	
"MsgSeqNo"	: 12 // (Number)	[0 - 65535]
"GwySerNo"	: "GWY00001" // (String)	[00001 - 99999]
"Location"	: "1 st Floor" // (String)	[20 chars long]
}		

Process flow diagram :

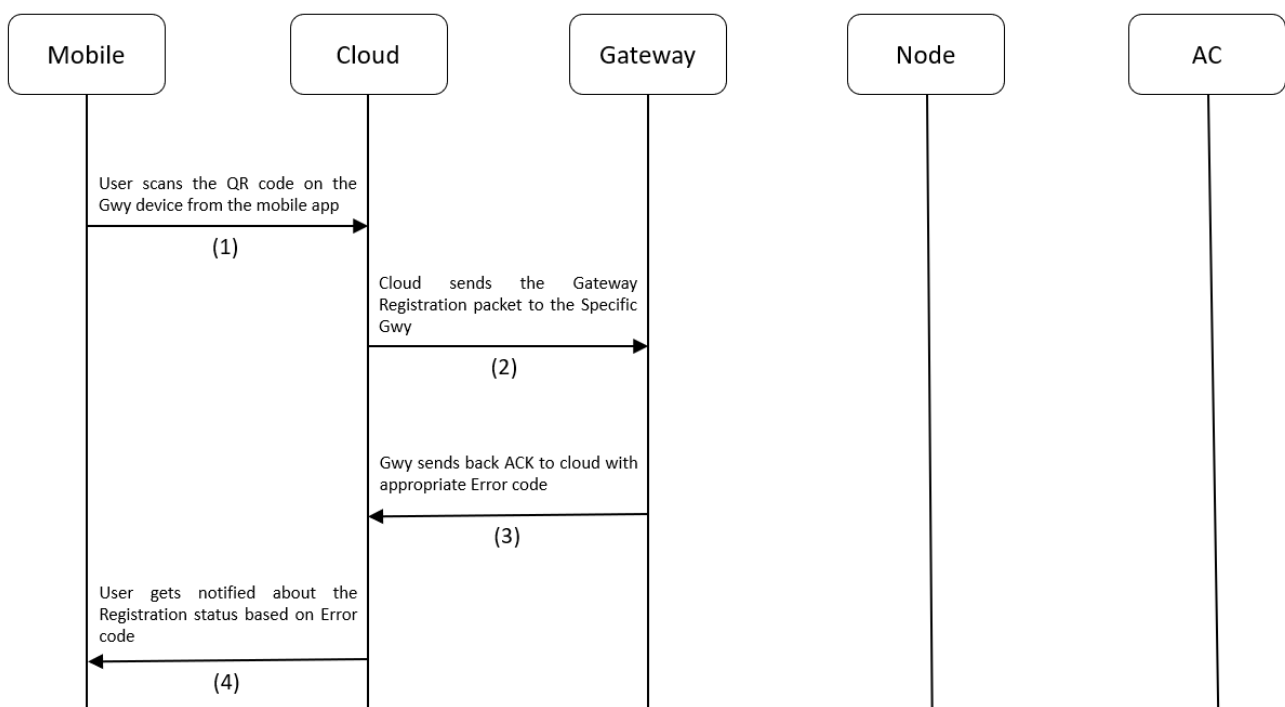


Figure 4.2 Gateway Registration process flow

4.4.4 Gateway Registration Ack

Description : This ack is used by cloud to know whether the Gwy registration was successful or not. Gateway sends back this packet after receiving Gateway Registration packet.

Gateway Registration JSON ACK (Gateway to Cloud):

		Range
{		
“JsonPacketId”	: 0 // (Number)	
“MsgSeqNo”	: 12 // (Number)	[0 - 65535]
“GwySerNo”	: “GWY00001” // (String)	[00001 - 99999]
“Location”	: “1 st Floor” // (String)	[20 chars long]
“ErrorCode”	: 0 // (Number)	
}		

Process flow diagram :

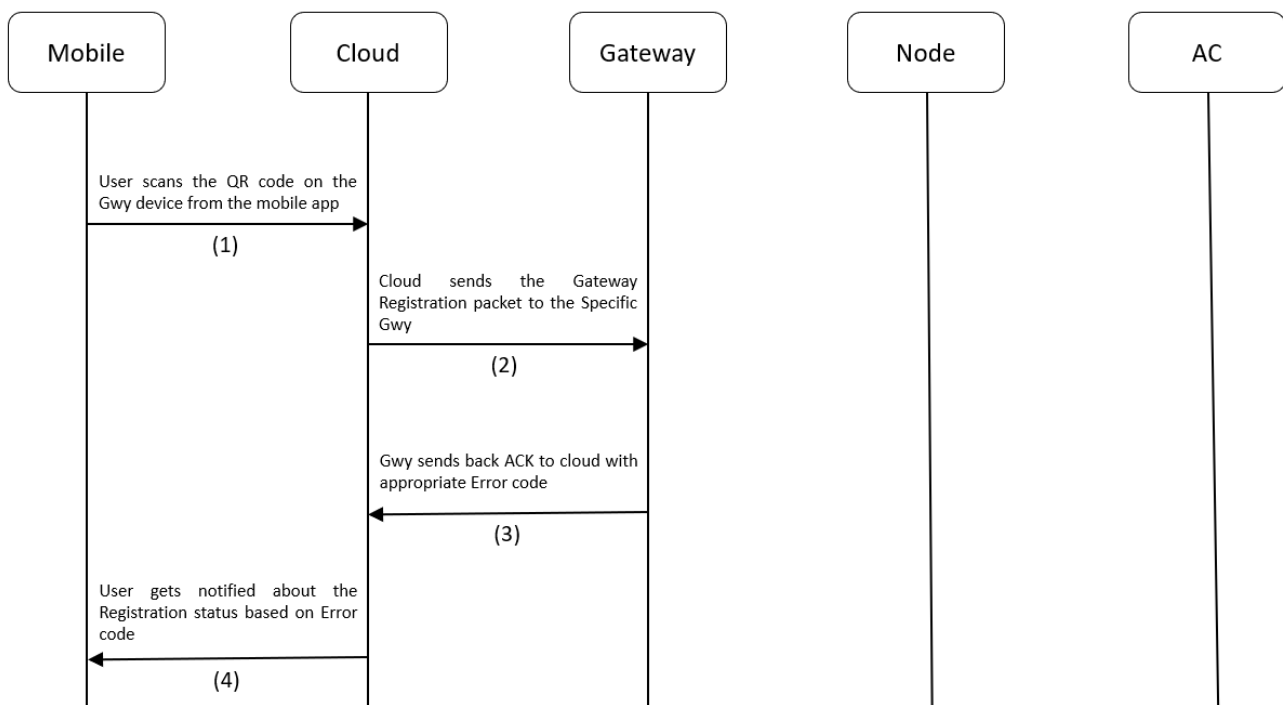


Figure 4.3 Gateway Registration process flow

4.4.5 Gateway AC Remote Configuration Ack

Description : This is an ACK sent by Gwy to Cloud when the Gwy is successfully configured with an AC remote. When Gwy is in AC Remote Configuration mode (Slow Blinking BLUE light), and AC remote is pressed in-front of the IR receiver in the Gwy, it will get configured to act as that AC remote from there on and send this ACK to the cloud.

LED Indication: If not configured, Gateway will be slow blinking BLUE (500ms ON | 500ms OFF), meaning the Gateway is in AC Remote configuration mode.

Gateway AC Remote Configuration JSON ACK (Gateway to Cloud):

		Range
{		
"JsonPacketId"	: 1 // (Number)	
"GwySerNo"	: "GWY00001" // (String)	[00001 - 99999]
"Location"	: "1 st Floor" // (String)	[20 chars long]
"ErrorCode"	: 0 // (Number)	
}		

Process flow :

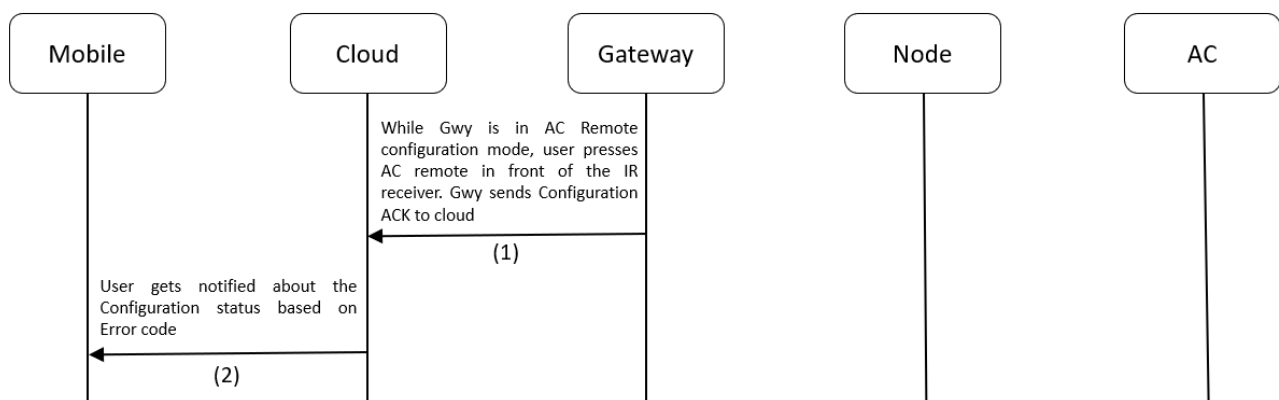


Figure 4.4 Gateway Configuration process flow

4.4.6 Gateway Unregistration Packet

Description : This packet is used to remove a Gwy device from the BLE Mesh network.

Note: When a Gateway is unregistered, it will also become unconfigured automatically.

Gateway Unregistration JSON (Cloud to Gateway):

		Range
{		
"JsonPacketId"	: 2 // (Number)	
"MsgSeqNo"	: 12 // (Number)	[0 - 65535]
"GwySerNo"	: "GWY00001" // (String)	[00001 - 99999]
"Location"	: "1 st Floor" // (String)	[20 chars long]
}		

Process flow :

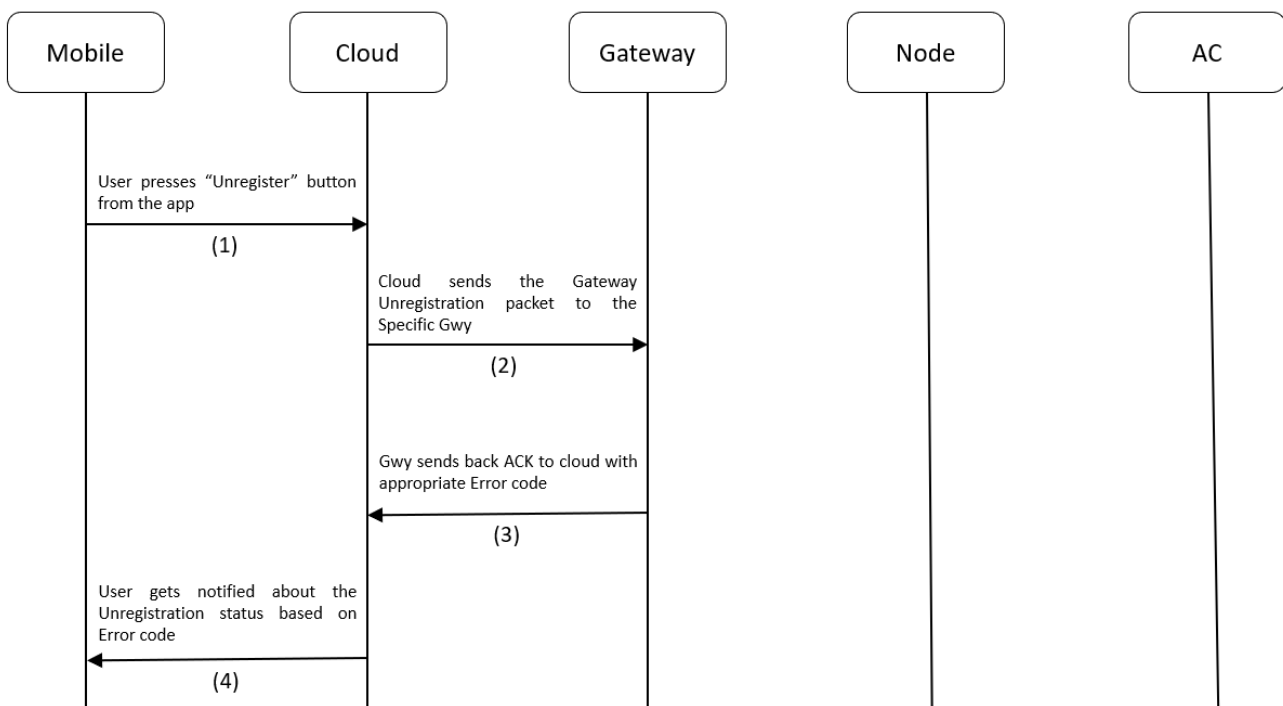


Figure 4.5 Gateway Unregistration Process flow

4.4.7 Gateway Unregistration Ack

Description : This ACK is used by cloud to know whether the Gwy Unregistration was successful or not. This packet is sent by Gateway after receiving Gateway Unregistration packet.

Gateway Unregistration JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId" : 2           // (Number)
  "MsgSeqNo"     : 12          // (Number)
  "GwySerNo"     : "GWY00001" // (String)
  "Location"     : "1st Floor" // (String)
  "ErrorCode"    : 0           // (Number)
}
```

Process flow :

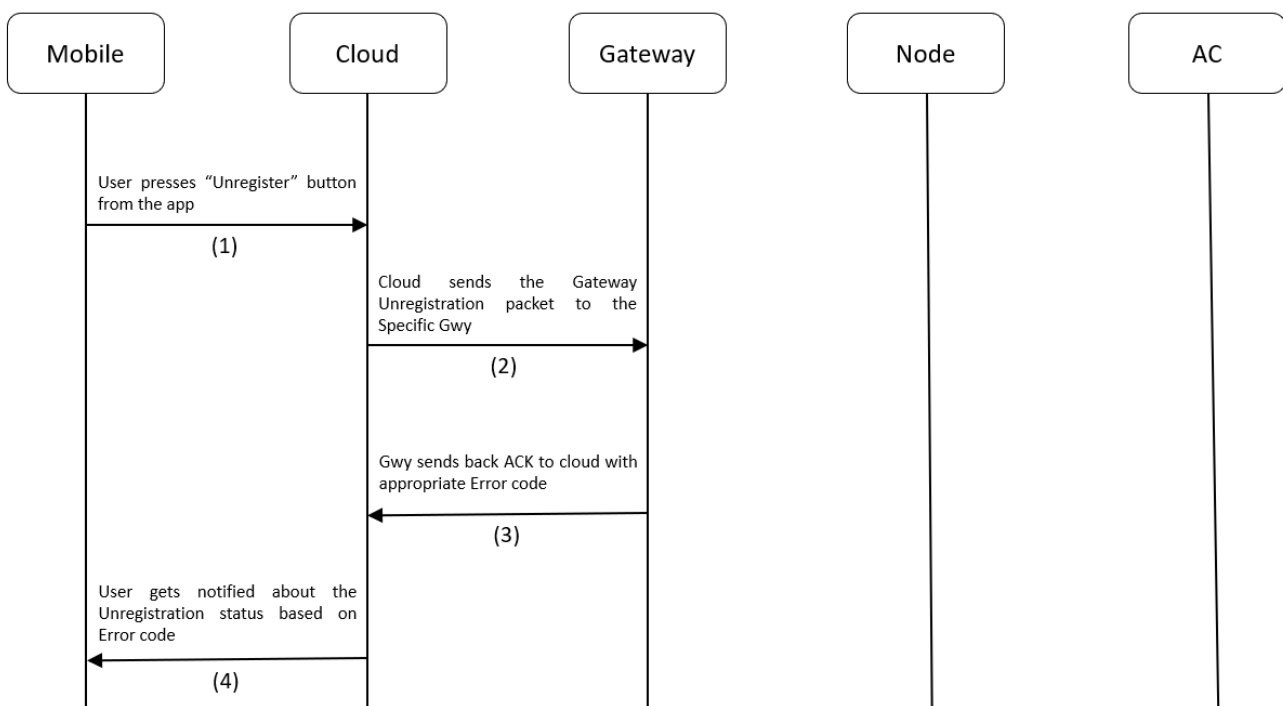


Figure 4.6 Gateway Unregistration Process Flow

4.4.8 Gateway AC Control Packet

Description: This packet is used to control an AC using the Gwy.

Sl.No	Parameter	Description	Possible Err Codes
1	Power	1 = ON, 0 = OFF	INVALID_POWER
2	Mode	Following modes are supported : [Cool, Dry, Hot, Fan, Auto].	INVALID_MODE
3	Temperature	Sets the AC temperature. Must be within 18 and 32.	EXCEEDING_TEMP_LOWER_LIMIT, EXCEEDING_TEMP_UPPER_LIMIT
4	SwingH	1 = ON, 0 = OFF	INVALID_SWING_H
5	SwingV	1 = ON, 0 = OFF	INVALID_SWING_V
6	OnTimer	Sets the number of hours past midnight after which AC needs to be turned on automatically	INVALID_ONTIMER
7	OffTimer	Sets the number of hours past midnight after which AC needs to be turned off automatically	INVALID_OFFTIMER
8	Locking	1 = ON, 0 = OFF. When ON, if AC was controlled manually, then Locking ACK will be sent to Cloud. Also, when ON, the AC will be maintained between the TempLockUpLimit and TempLockLowLimit. If by manual control, AC temp was set exceeding the above limits, then AC's temperature will be brought back under accepted limits.	INVALID_LOCKING
9	TempLockUpLimit	Specifies upper temperature locking limit. This parameter will have no effect application wise, when Locking is not enabled. Must have values within the absolute Temperature limits : 18 - 32. Default value : 27	INVALID_TEMP_UPPER_LIMIT, ILLOGICAL_LOCKING_TEMP_LIMIT
10	TempLockLowLimit	Specifies Lower temperature locking limit. This parameter will have no effect application wise, when Locking is not enabled. Must have values within the absolute	INVALID_TEMP_LOWER_LIMIT, ILLOGICAL_LOCKING_TEMP_LIMIT

		Temperature limits : 18 - 32. Default value : 20.	
--	--	--	--

Gateway AC Control JSON packet (Cloud to Gateway):

			Range
{			
"JsonPacketId"	: 3	// (Number)	
"MsgSeqNo"	: 12	// (Number)	[0 - 65535]
"GwySerNo"	: "GWY00001"	// (String)	[00001 - 99999]
"Power"	: 1	// (Number)	[0 = OFF, 1 = ON]
"Mode"	: "Cool"	// (String)	["Cool", "Dry", "Auto", "Fan", "Hot"]
"Fan"	: 1	// (Number)	[1 - 5]
"Temperature"	: 25	// (Number)	[18 - 32]
"SwingH"	: 1	// (Number)	[0 = OFF, 1 = ON]
"SwingV"	: 1	// (Number)	[0 = OFF, 1 = ON]
"OnTimer"	: 0	// (Number)	[0 - 12]
"OffTimer"	: 0	// (Number)	[0 - 12]
"Locking"	: 1	// (Number)	[0 = OFF, 1 = ON]
"TempLockUpLimit"	: 26	// (Number)	[18 - 32]
"TempLockLowLimit"	: 20	// (Number)	[18 - 32]
}			

Process flow :

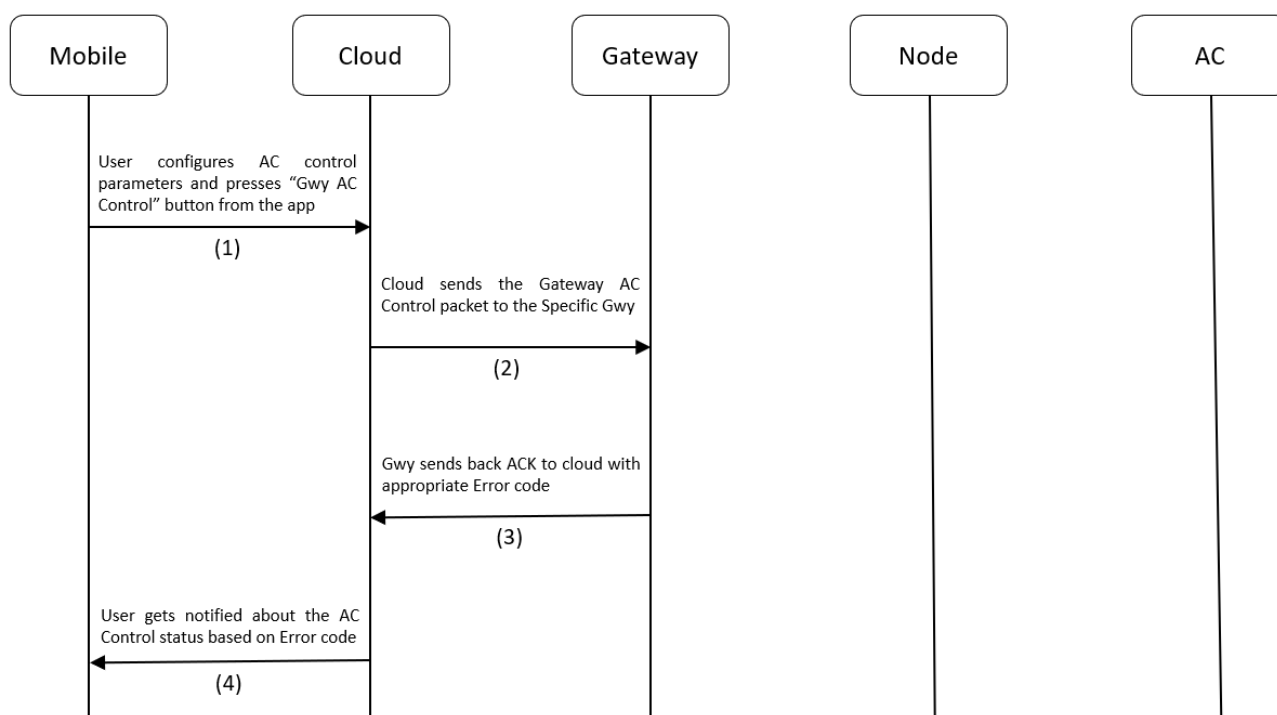


Figure 4.7 Gateway AC Control Process flow

4.4.9 Gateway AC Control Ack

Description: This ack is used by cloud to know whether the Gwy AC Control was successful or not.

Gateway AC Control JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId"      : 3           // (Number)
  "MsgSeqNo"          : 12          // (Number)
  "GwySerNo"           : "GWY00001" // (String)
  "Power"              : 1           // (Number)
  "Mode"               : "Cool"      // (String)
  "Fan"                : 1           // (Number)
  "Temperature"        : 25          // (Number)
  "SwingH"             : 1           // (Number)
  "SwingV"             : 1           // (Number)
  "OnTimer"            : 0           // (Number)
  "OffTimer"           : 0           // (Number)
  "Locking"            : 1           // (Number)
  "TempLockUpLimit"    : 26          // (Number)
  "TempLockLowLimit"   : 20          // (Number)
  "ErrorCode"          : 0           // (Number)
}
```

Process flow :

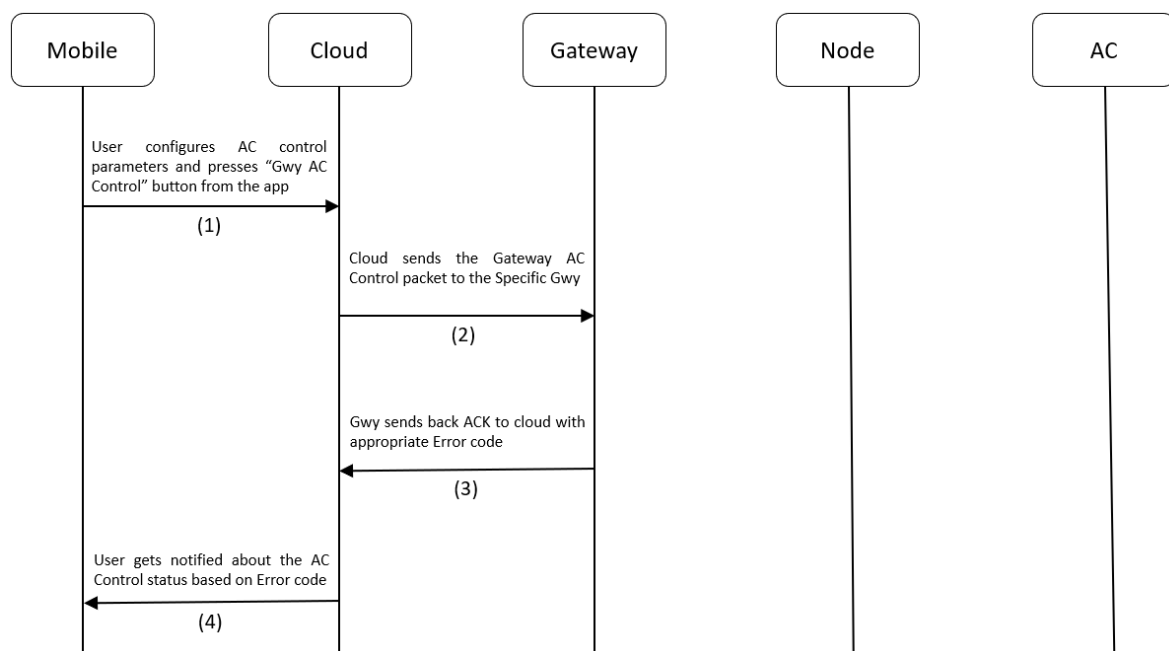


Figure 4.8 Gateway AC Control Process flow

4.4.10 Gateway AC manual control Ack

Description: This ack is used by cloud to know whether the AC was controlled manually using the AC remote. If someone controls the AC manually using the remote, then the IR receiver on-board, will capture this IR signal and decode it. If it's a signal from the same remote with which the Gateway was configured with during the AC Remote configuration process, then it will store the manual control information for sending it to the cloud. Also it performs logical operation based on the temperature that was set using the remote. If it exceeds the Locking temperature limits set from the AC Control packet, then it will bring the AC's temperature back to permissible limits.

Note: This ACK will be sent from Gateway only if the Locking feature had been enabled. By default, the TempLockUpLimit is set to 27 and TempLockLowLimit is set to 20.

Gateway AC Locking JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId"      : 4           // (Number)
  "MsgSeqNo"          : 12          // (Number)
  "GwySerNo"          : "GWY00001" // (String)
  "Power"              : 1           // (Number)
  "Mode"              : "Cool"      // (String)
  "Fan"               : 1           // (Number)
  "Temperature"        : 25         // (Number)
  "SwingH"            : 1           // (Number)
  "SwingV"            : 1           // (Number)
  "OnTimer"           : 0           // (Number)
  "OffTimer"          : 0           // (Number)
  "Locking"           : 1           // (Number)
  "TempLockUpLimit"   : 26         // (Number)
  "TempLockLowLimit"  : 20         // (Number)
}
```

Process flow :

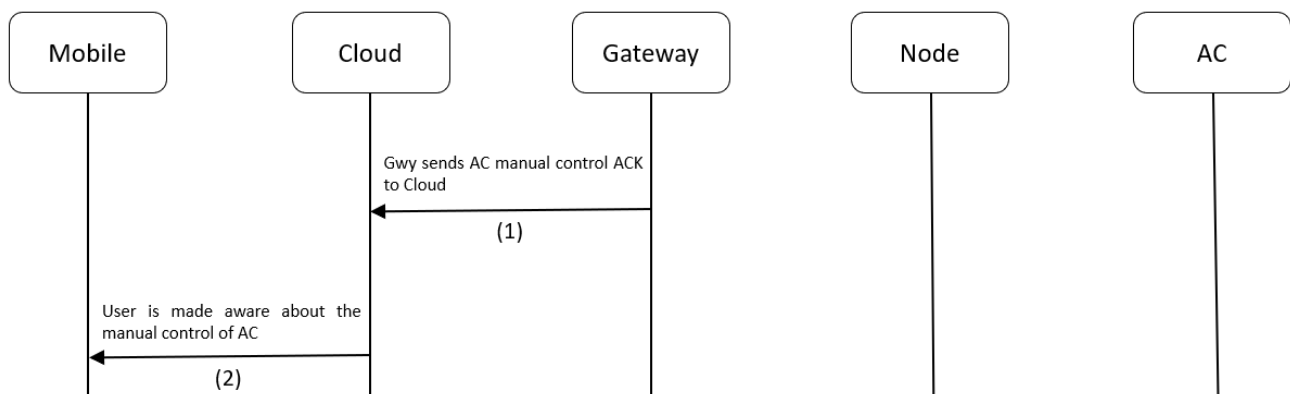


Figure 4.9 Gateway AC manual control Process flow

4.4.11 Gateway AC Remote Reconfiguration Packet

Description: This packet is used to put the Gwy in AC remote configuration mode. If the Gateway had not been configured and this packet was received by the Gateway, then the Gateway will send GWY_ALREADY_UNCONF error in the ACK, back to cloud.

Gateway AC Remote Reconfiguration JSON (Cloud to Gateway):

		Range
{		
"JsonPacketId"	: 5	// (Number)
"MsgSeqNo"	: 12	// (Number) [0 - 65535]
"GwySerNo"	: "GWY00001"	// (String) [00001 - 99999]
}		

Process flow :

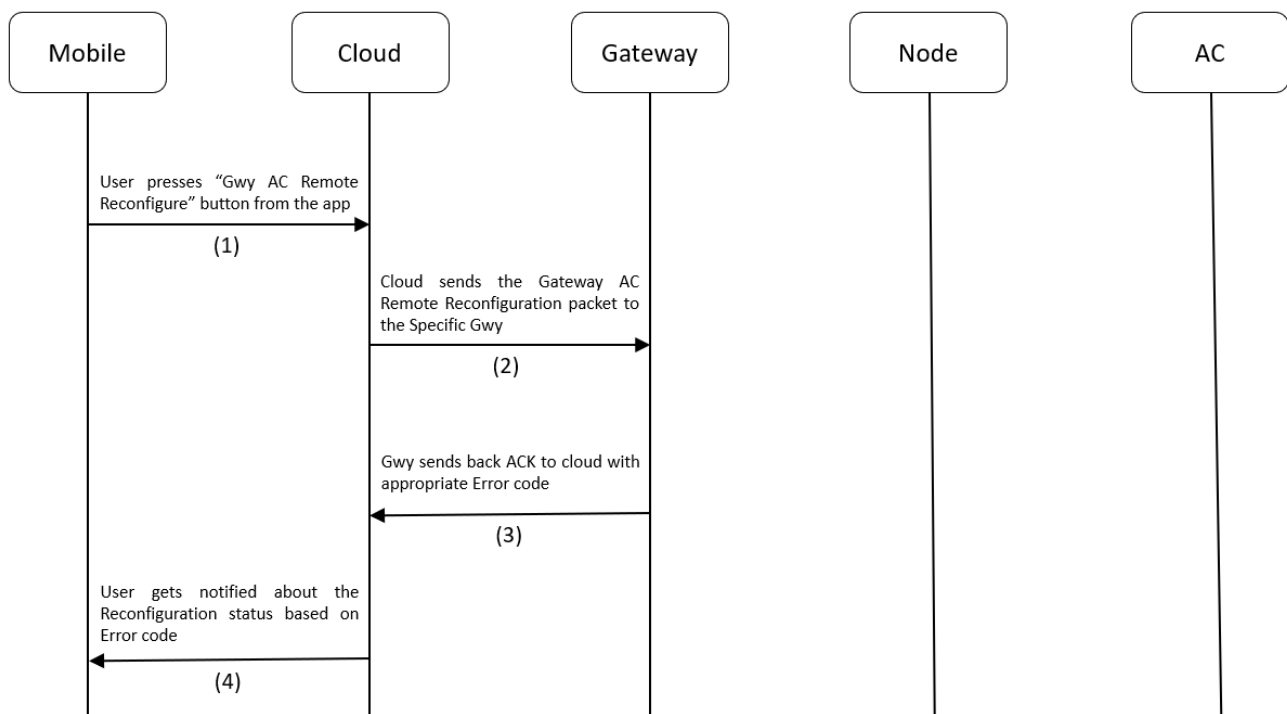


Figure 4.10 Gateway AC Remote Reconfiguration Process Flow

4.4.12 Gateway AC Remote Reconfiguration Ack

Description: This ACK is used by cloud to know if the Gwy has entered AC Remote reconfiguration mode after receiving the reconfiguration packet.

Gateway AC Remote Reconfiguration JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId" : 5           // (Number)
  "MsgSeqNo"     : 12          // (Number)
  "GwySerNo"     : "GWY00001" // (String)
  "ErrorCode"    : 0           // (Number)
}
```

Process flow :

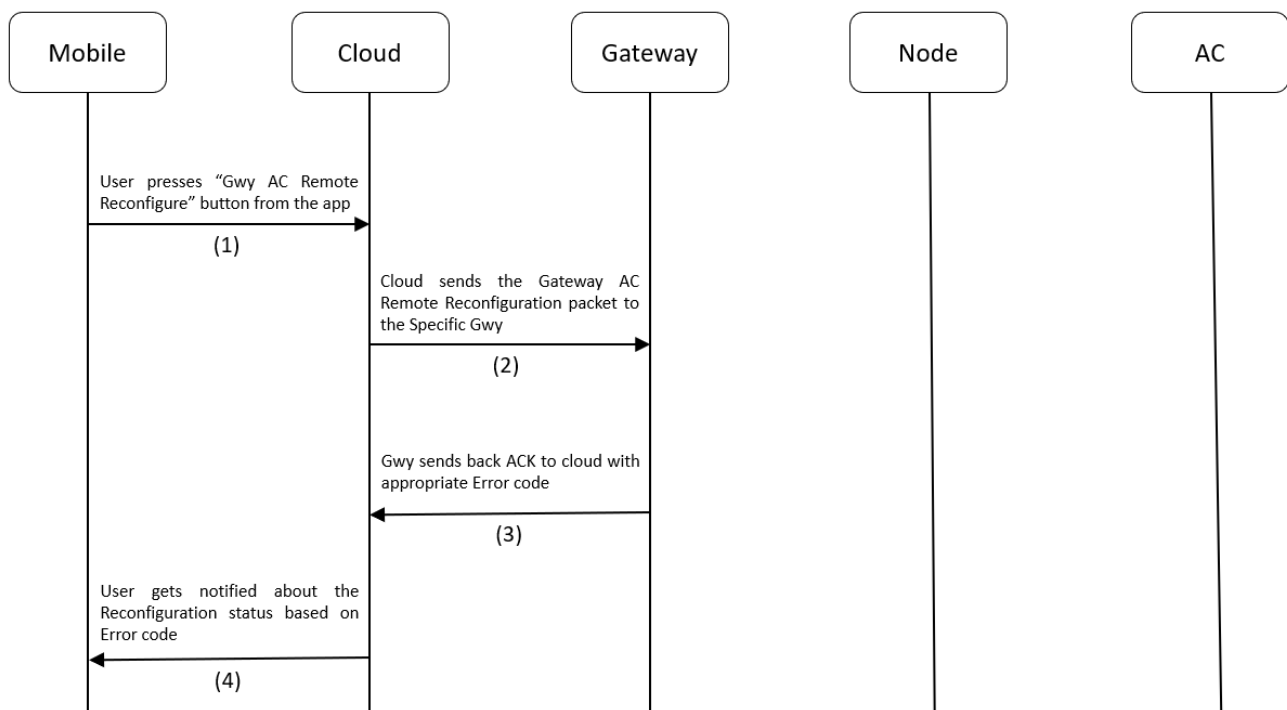


Figure 4.11 Gateway AC Remote Reconfiguration Process flow

4.4.13 Gateway Temperature Data Ack

Description: This ACK is used by cloud to know the ambient temperature of the environment in which the Gwy is operating. This ACK is sent periodically to the cloud. This frequency can be configured in the Gateway Temperature Publish Configuration Packet.

Note: This ACK is used for Heartbeat purpose as well.

Gateway Temperature Data JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId" : 6           // (Number)
  "MsgSeqNo"     : 12          // (Number)
  "GwySerNo"     : "GWY00001" // (String)
  "Temperature"  : 23          // (Number)
}
```

Process flow :

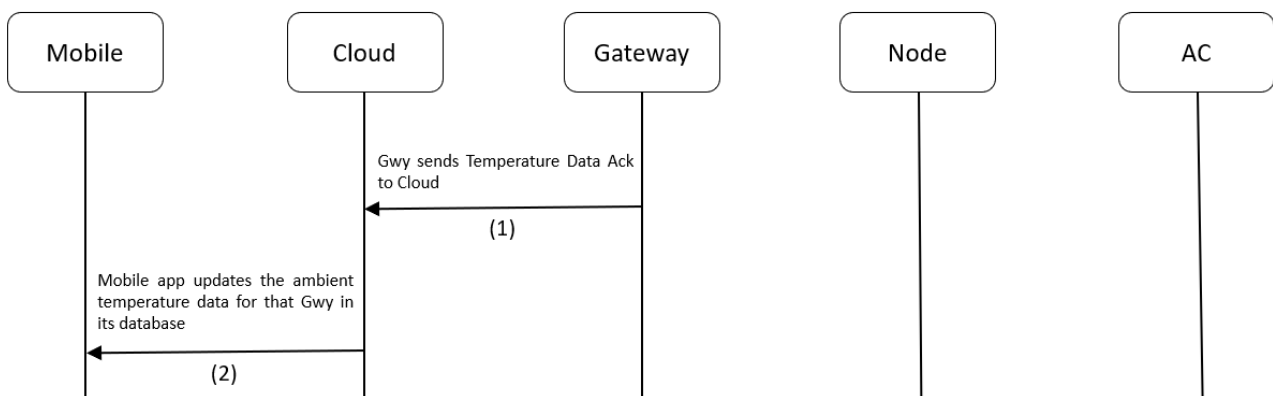


Figure 4.12 Gateway Temperature Data Process flow

4.4.14 Gateway Temperature Publish configuration Packet

Description: This packet is used to tell the Gwy, how frequently it needs to send the Temperature data ACK to cloud. The frequency is configurable in seconds.

Gateway Temperature Publish configuration JSON (Cloud to Gateway):

			Range
{			
“JsonPacketId”	: 7	// (Number)	
“MsgSeqNo”	: 12	// (Number)	[0 – 65535]
“GwySerNo”	: “GWY00001”	// (String)	[00000 - 99999]
“PublishPeriodSec”	: 20	// (Number) (in Sec)	[0 - 65535]
}			

Process flow :

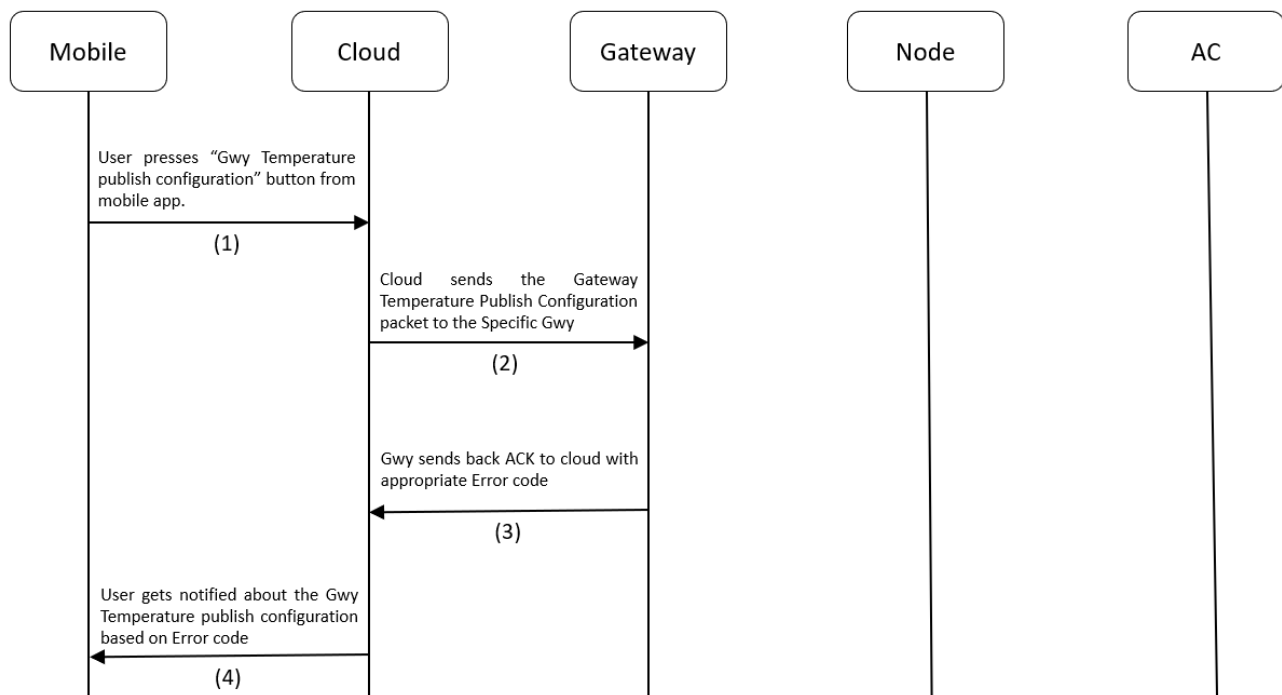


Figure 4.13 Gateway Publish Configuration Process flow

4.4.15 Gateway Temperature Publish configuration Ack

Description: This ACK is used by cloud to know whether the Publish configuration was successful or not.

Gateway Temperature Publish Configuration JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId"    : 7           // (Number)
  "MsgSeqNo"        : 12          // (Number)
  "GwySerNo"        : "GWY00001"  // (String)
  "PublishPeriodSec" : 20          // (Number) (in Sec)
  "ErrorCode"       : 0           // (Number)
}
```

Process flow :

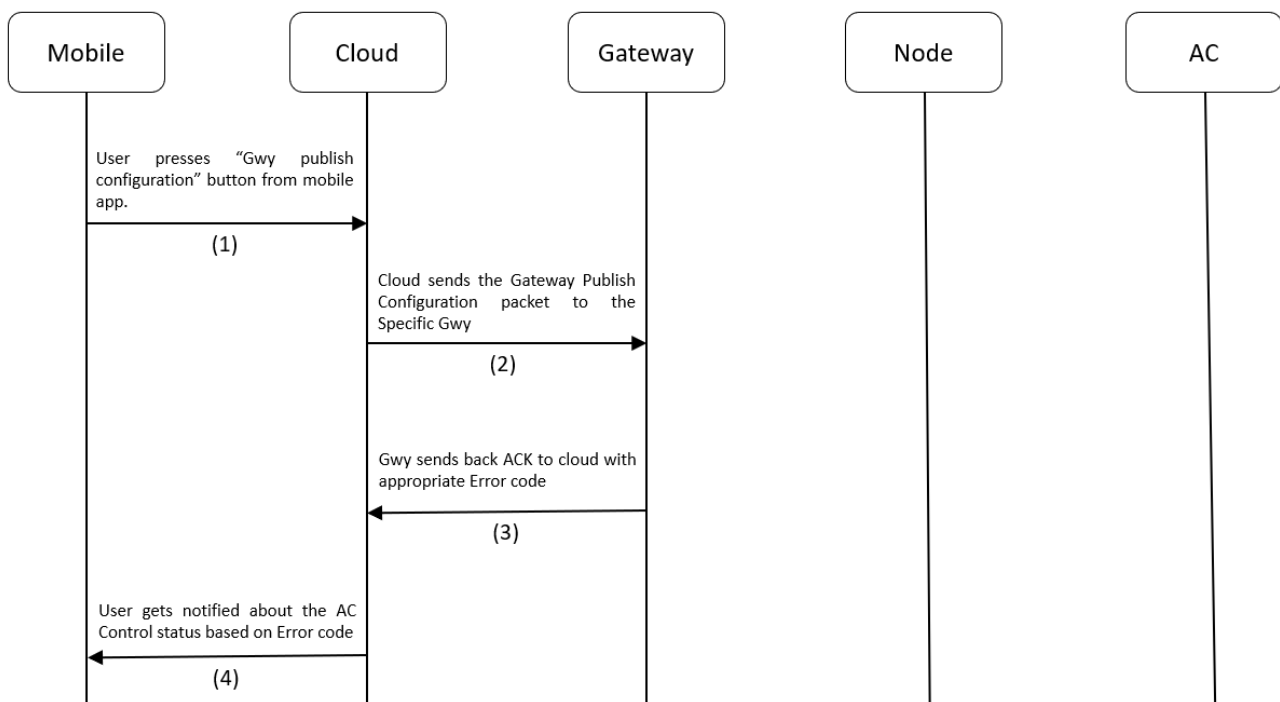


Figure 4.14 Gateway Publish Configuration Process flow

4.4.16 Gateway Reset MQTT Packet

Description: This packet is used to reset the MQTT parameters saved in the Gateway. This puts the Gateway into MQTT configuration mode.

Note: This will not Unregister or Unconfigure Gateway from the BLE Mesh network. But until Gateway is provided with new MQTT parameters, it will not be able to receive any more commands from Cloud. While in this state, Gateway – Node communication will still be unaffected. But this state should not be maintained for longer periods, as Gateway will keep accumulating data received from Nodes and unable to send them out anywhere. Soon, buffer will get filled and data will start to get overwritten leading to data loss.

Gateway Reset MQTT JSON (Cloud to Gateway):

		Range
{		
"JsonPacketId"	: 8 // (Number)	
"MsgSeqNo"	: 12 // (Number)	[0 – 65535]
"GwySerNo"	: "GWY00001" // (String)	[00001 - 99999]
}		

Process flow :

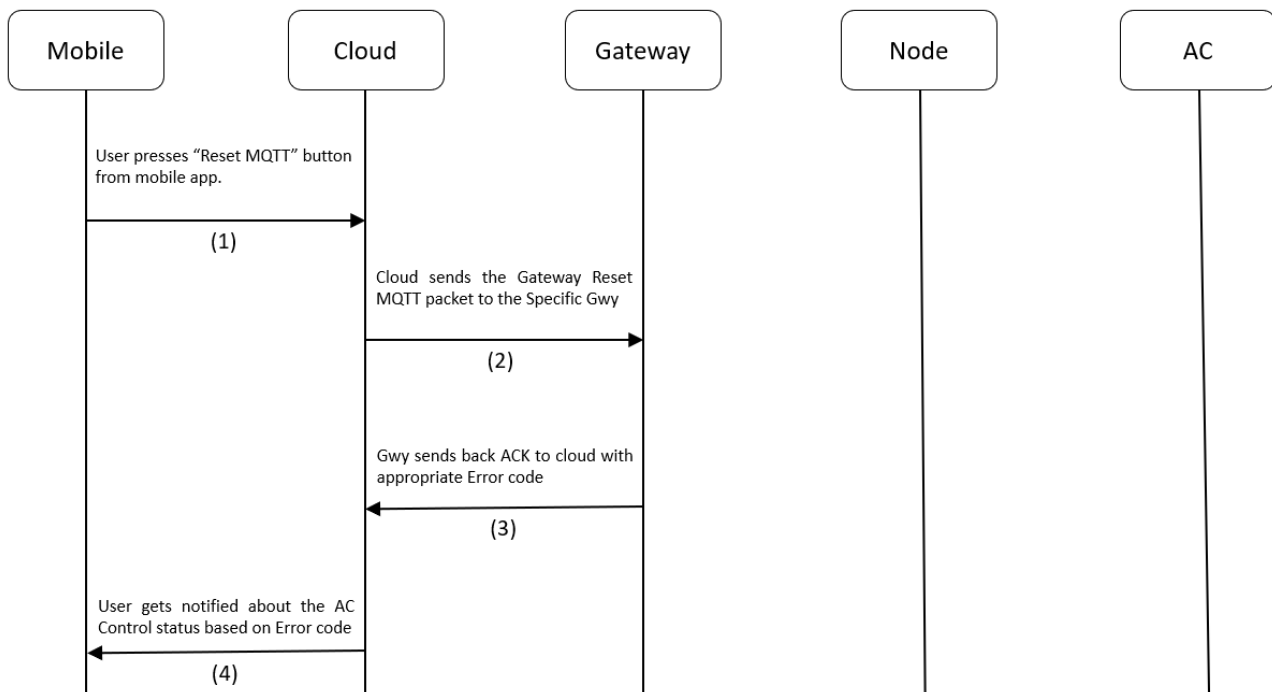


Figure 4.15 Gateway Reset MQTT Process flow

4.4.17 Gateway Reset MQTT Ack

Description: This ACK is used by cloud to know whether the Reset MQTT operation was successful or not.

Gateway Reset MQTT JSON ACK (Gateway to Cloud):

```
{
  "JsonPacketId" : 8           // (Number)
  "GwySerNo"     : "GWY00001" // (String)
  "ErrorCode"    : 0           // (Number)
}
```

Process flow :

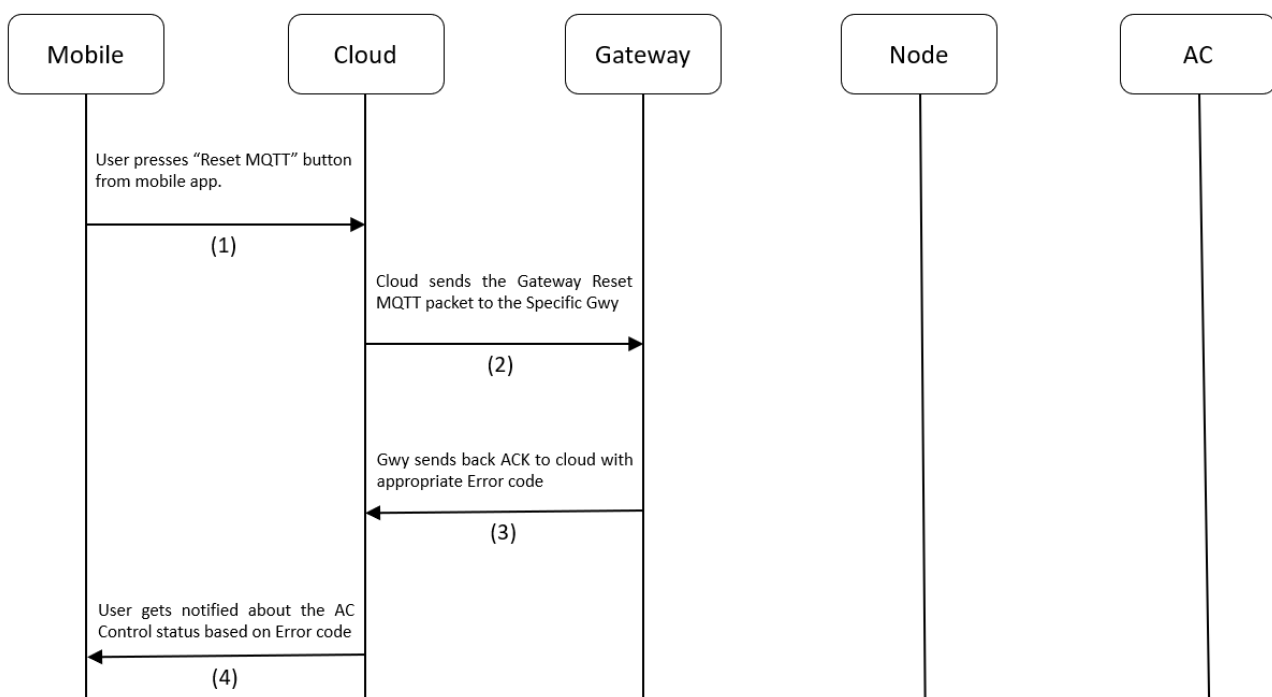


Figure 4.16 Gateway Reset MQTT Process flow

4.4.18 Node Provision Packet

Description: This packet is used to add a Node device into the BLE Mesh network

Node Provisioning JSON (Cloud to Gateway to Node):

		Range
{		
"JsonPacketId"	: 100 // (Number)	
"MsgSeqNo"	: 12 // (Number)	[0 – 65535]
"GwySerNo"	: "GWY00001" // (String)	[00001 - 99999]
"NodeSerNo:"	: "N00001" // (String)	[00001 - 99999]
"MacId"	: "D3:F5:FB:CA:14:25" // (String)	[17 chars long]
}		

Process flow :

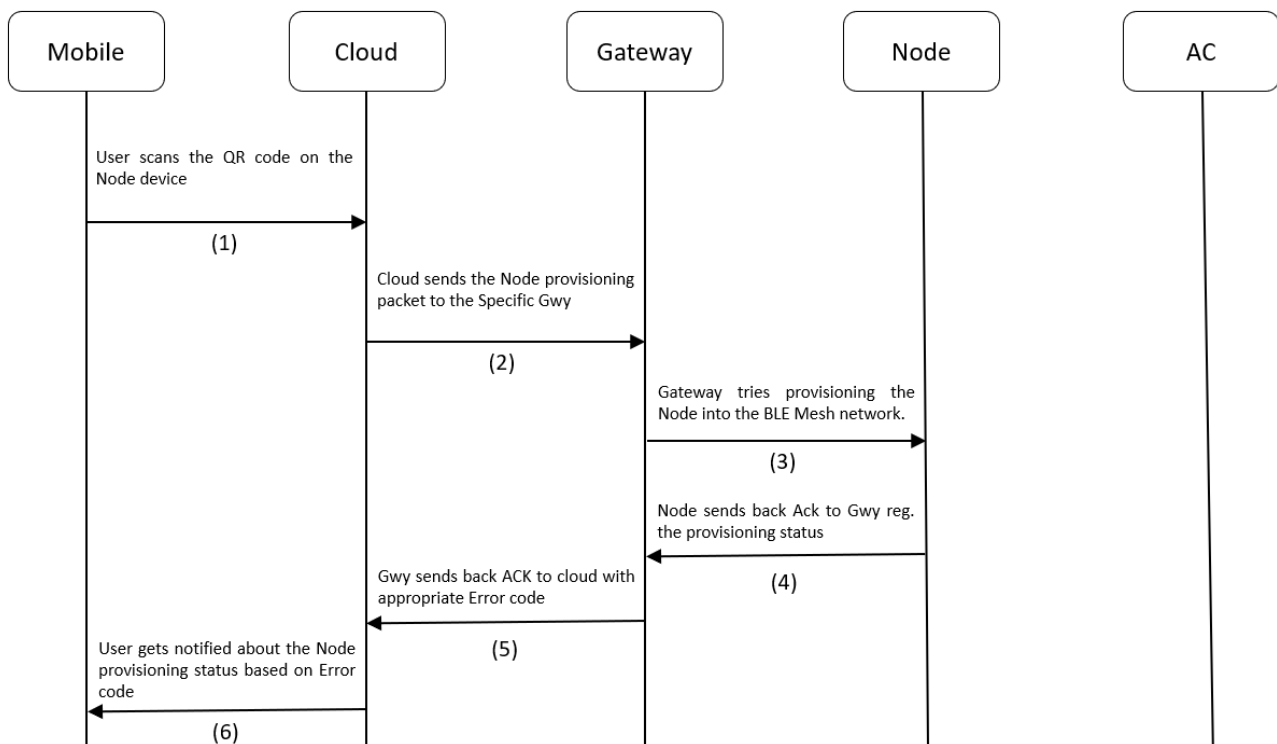


Figure 4.17 Node Provisioning Process flow

4.4.19 Node Provision Ack

Description: This ack is used by cloud to know whether the Node provisioning was successful or not.

Note: In this ACK, the **ElementAddr** is a very important field, whose value should be noted for further Node operations. Only using this ElementAddr, the Gateway will be able to communicate with the Node. This ElementAddr field will be included in all Node related MQTT packets.

Node Provisioning JSON ACK (Node to Gateway to Cloud):

		Range
{		
“JsonPacketId”	: 100	// (Number)
“MsgSeqNo”	: 12	// (Number)
“GwySerNo”	: “GWY00001”	// (String)
“NodeSerNo:	: “N00001”	// (String)
“MacId”	: “D3:F5:FB:CA:14:25”	// (String)
“ElementAddr”	: 23	// (Number) [2 - 65535]
“ErrorCode”	: 0	// (Number)
}		

Process flow :

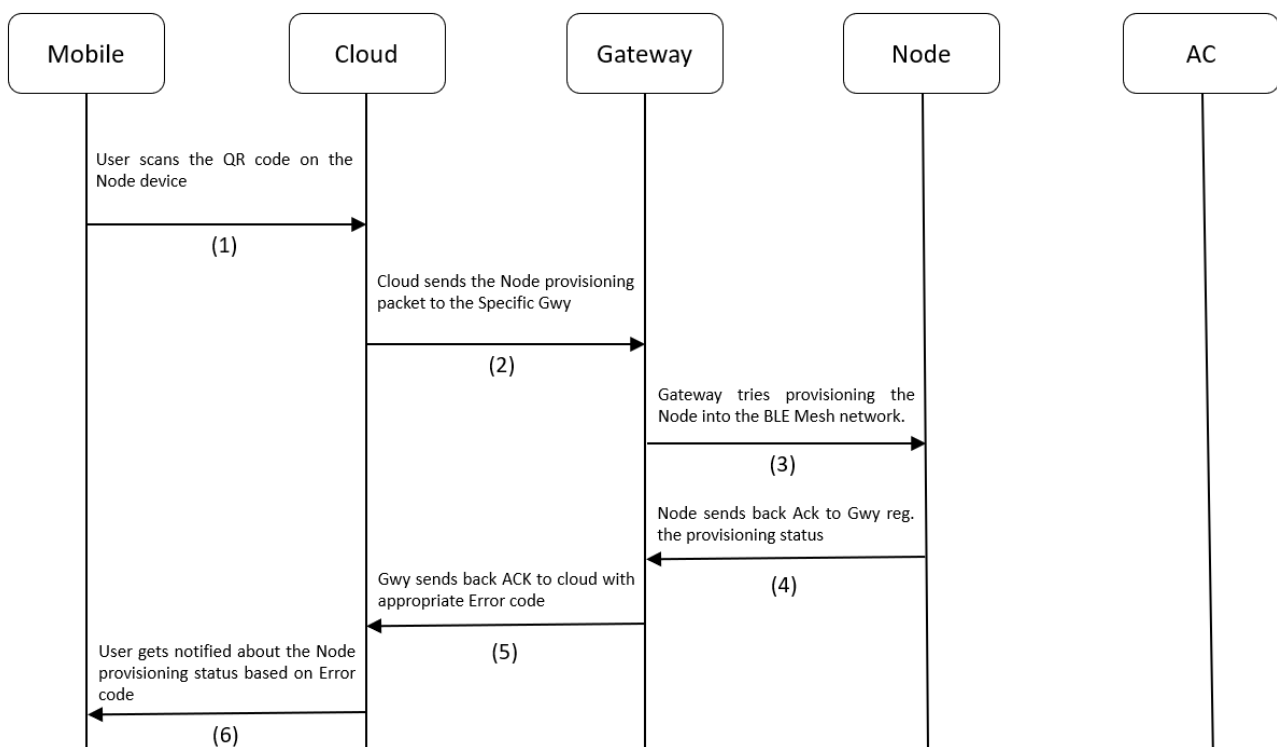


Figure 4.18 Node Provisioning Process flow

4.4.20 Node AC Remote Configuration Ack

Description: This is an ACK sent by Node to Gwy to Cloud when the Node is successfully configured with an AC remote. When Node is in AC Remote Configuration mode and AC remote is pressed in-front of the IR receiver in the Node, it will get configured to act as that AC remote from there on.

LED Indication: Slow Blinking BLUE (500ms ON | 500ms OFF)

Node Configuration JSON ACK (Node to Gateway to Cloud):

{		Range
"JsonPacketId" : 101	// (Number)	
"MsgSeqNo" : 12	// (Number)	
"GwySerNo" : "GWY00001"	// (String)	
"NodeSerNo" : "N00001"	// (String)	
"ElementAddr" : 23	// (Number)	[2 - 65535]
"ErrorCode" : 0	// (Number)	
}		

Process flow :

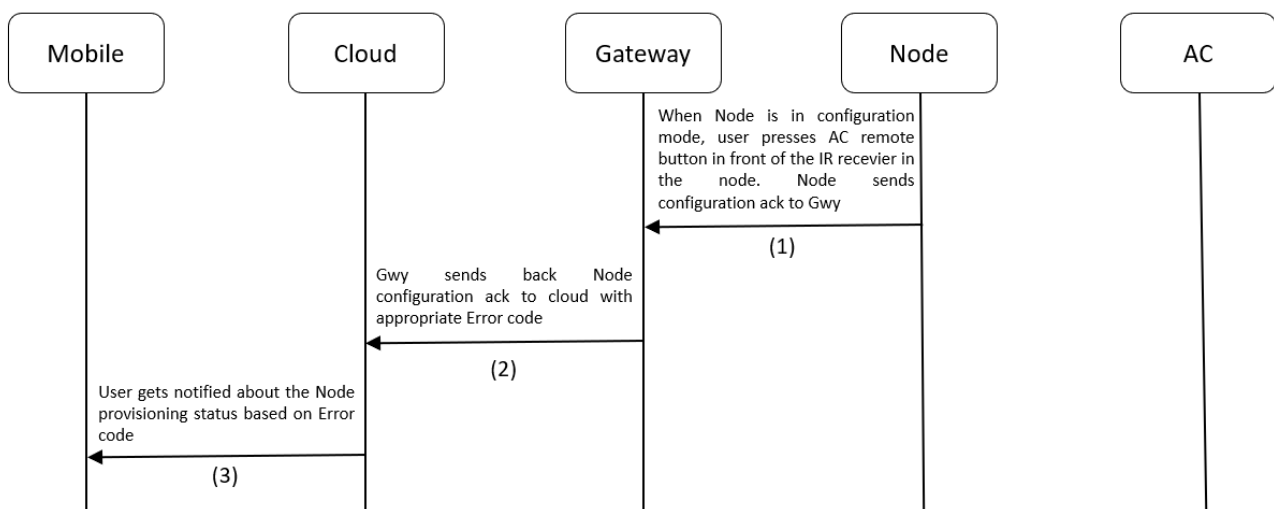


Figure 4.19 Node Configuration Process flow

4.4.21 Node Unprovision Packet

Description: This packet is used to remove a Node device from the BLE Mesh network.

Node Unprovisioning JSON (Cloud to Gateway to Node):

{		Range
"JsonPacketId" : 102	// (Number)	
"MsgSeqNo" : 12	// (Number)	
"GwySerNo" : "GWY00001"	// (String)	
"NodeSerNo" : "N00001"	// (String)	
"ElementAddr" : 23	// (Number)	[2 - 65535]
}		

Process flow :

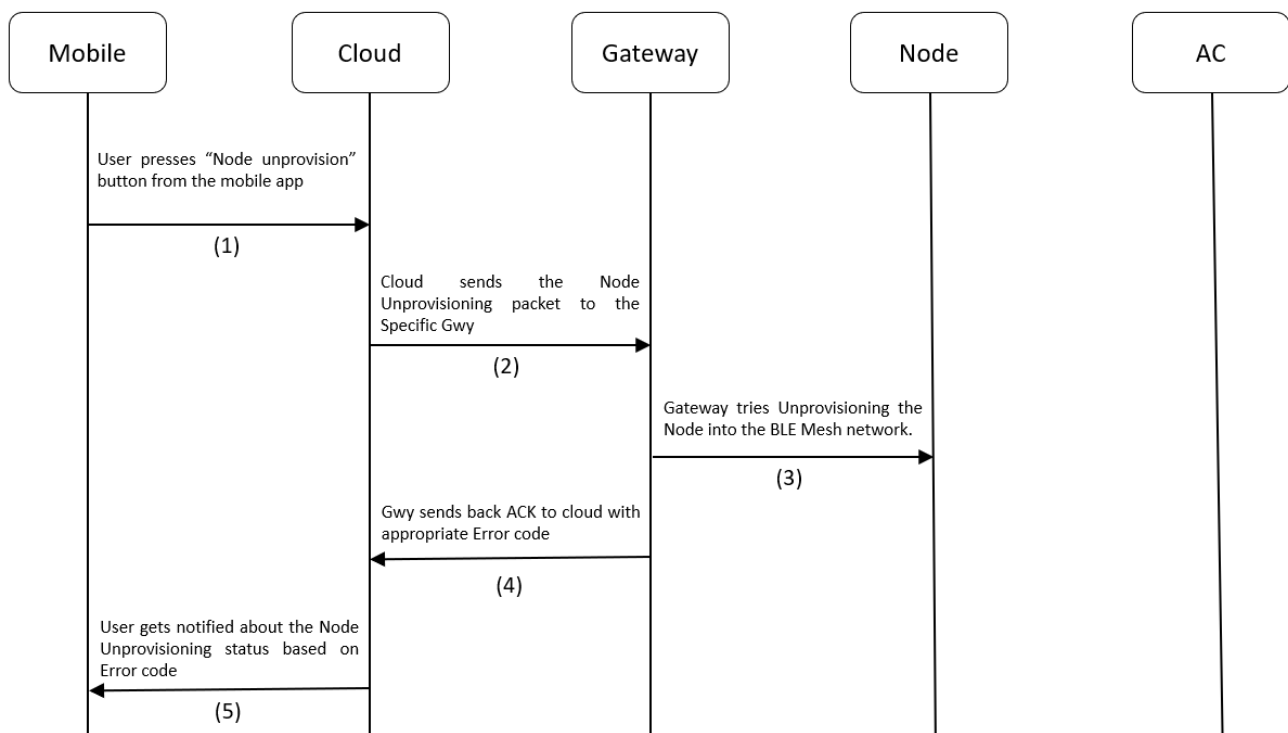


Figure 4.20 Node Unprovisioning Process flow

4.4.22 Node Unprovision Ack

Description: This packet is used to add a Node device into the BLE Mesh network

Node Unprovisioning JSON ACK (Node to Gateway to Cloud):

		Range
{		
"JsonPacketId"	: 102	// (Number)
"MsgSeqNo"	: 12	// (Number)
"GwySerNo"	: "GWY00001"	// (String)
"NodeSerNo:"	: "N00001"	// (String)
"ElementAddr"	: 23	// (Number) [2 - 65535]
"ErrorCode"	: 0	// (Number)
}		

Process flow :

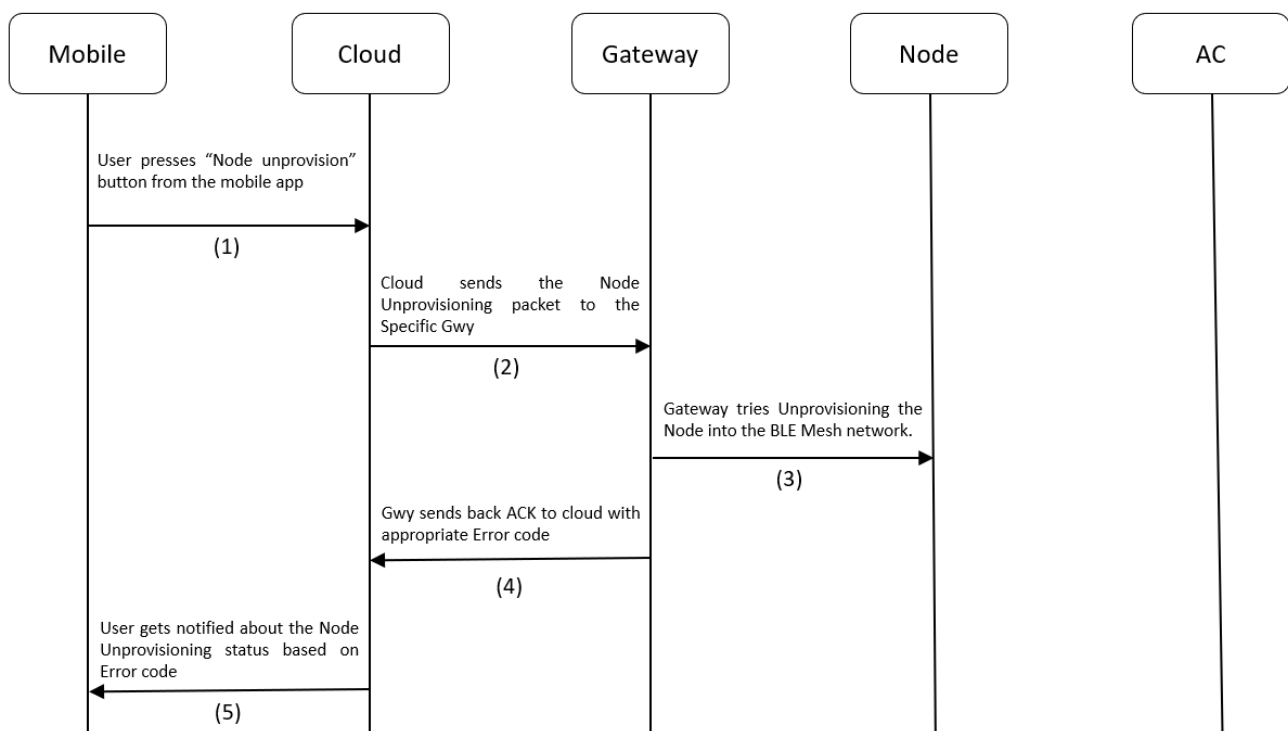


Figure 4.21 Node Unprovisioning Process flow

4.4.23 Node AC Control Packet

Description: This packet is used to control an AC using Node.

Table 4.6 Node AC Control JSON Parameters

Sl.No	Parameter	Description	Possible Err Codes
1	Power	1 = ON, 0 = OFF	INVALID_POWER
2	Mode	Following modes are supported : [Cool, Dry, Hot, Fan, Auto].	INVALID_MODE
3	Temperature	Sets the AC temperature. Must be within 18 and 32.	EXCEEDING_TEMP_LOWER_LIMIT, EXCEEDING_TEMP_UPPER_LIMIT
4	SwingH	1 = ON, 0 = OFF	INVALID_SWING_H
5	SwingV	1 = ON, 0 = OFF	INVALID_SWING_V
6	OnTimer	Sets the number of hours past midnight after which AC needs to be turned on automatically	INVALID_ONTIMER
7	OffTimer	Sets the number of hours past midnight after which AC needs to be turned off automatically	INVALID_OFFTIMER
8	Locking	1 = ON, 0 = OFF. When ON, if AC was controlled manually, then Locking ACK will be sent to Cloud. Also, when ON, the AC will be maintained between the TempLockUpLimit and TempLockLowLimit. If, manual control, AC temp was set exceeding the above limits, then AC's temperature will be brought back under accepted limits.	INVALID_LOCKING
9	TempLockUpLimit	Specifies upper temperature locking limit. This parameter will have no effect application wise, when Locking is not enabled. Must have values within the absolute Temperature limits : 18 - 32. Default value : 27	INVALID_TEMP_UPPER_LIMIT, ILLOGICAL_LOCKING_TEMP_LIMIT
10	TempLockLowLimit	Specifies Lower temperature locking limit. This parameter will have no effect application wise, when Locking is not enabled. Must have values	INVALID_TEMP_LOWER_LIMIT, ILLOGICAL_LOCKING_TEMP_LIMIT

		within the absolute Temperature limits : 18 - 32. Default value : 20.	
--	--	--	--

Node AC Control JSON (Cloud to Gateway to Node):

			Range
{			
"JsonPacketId"	: 103	// (Number)	
"MsgSeqNo"	: 12	// (Number)	[0 - 65535]
"GwySerNo"	: "GWY00001"	// (String)	[00001 - 99999]
"NodeSerNo"	: "N00001"	// (String)	[00001 - 99999]
"ElementAddr"	: 23	// (Number)	[2 - 65535]
"Power"	: 1	// (Number)	[0 = OFF, 1 = ON]
"Mode"	: "Cool"	// (String)	["Cool", "Dry", "Auto", "Fan", "Hot"]
"Fan"	: 1	// (Number)	[1 - 5]
"Temperature"	: 25	// (Number)	[18 - 32]
"SwingH"	: 1	// (Number)	[0 = OFF, 1 = ON]
"SwingV"	: 1	// (Number)	[0 = OFF, 1 = ON]
"OnTimer"	: 0	// (Number)	[0 - 12]
"OffTimer"	: 0	// (Number)	[0 - 12]
"Locking"	: 1	// (Number)	[0 = OFF, 1 = ON]
"TempLockUpLimit"	: 26	// (Number)	[18 - 32]
"TempLockLowLimit"	: 20	// (Number)	[18 - 32]
}			

Process flow :

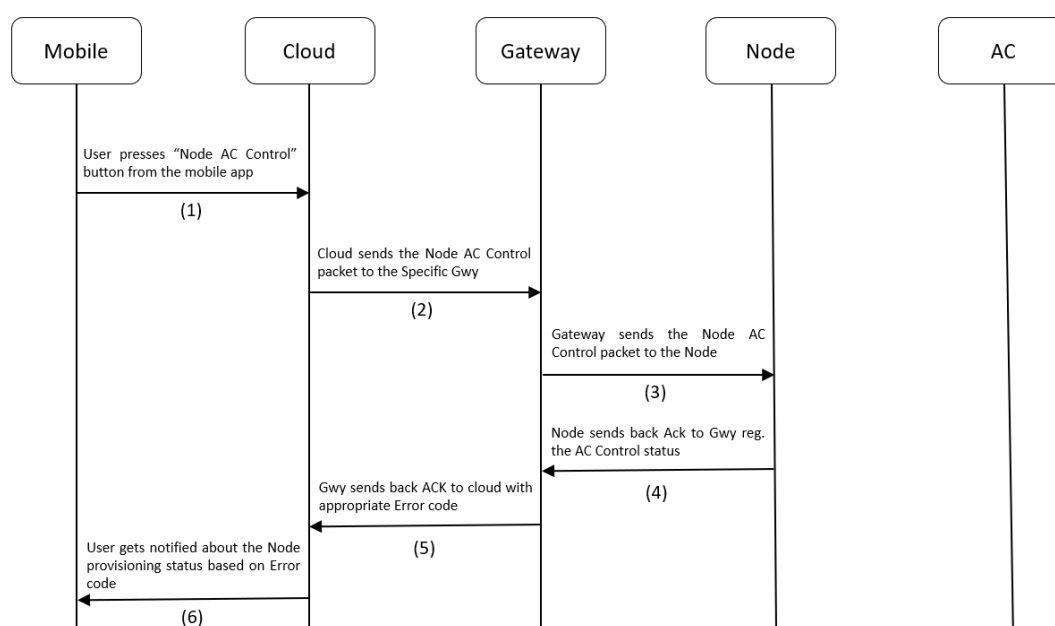


Figure 4.22 Node AC Control Process flow

4.4.24 Node AC Control Ack

Description: This is used by cloud to know if the AC Control was successful or not.

Node AC Control JSON ACK (Node to Gateway to Cloud):

```
{
  "JsonPacketId"      : 103           // (Number)
  "MsgSeqNo"          : 12            // (Number)
  "GwySerNo"           : "GWY00001"   // (String)
  "NodeSerNo"          : "N00001"     // (String)
  "ElementAddr"        : 23           // (Number)
  "Power"              : 1            // (Number)
  "Mode"               : "Cool"       // (String)
  "Fan"                : 1            // (Number)
  "Temperature"        : 25           // (Number)
  "SwingH"             : 1            // (Number)
  "SwingV"             : 1            // (Number)
  "OnTimer"            : 0            // (Number)
  "OffTimer"           : 0            // (Number)
  "Locking"            : 1            // (Number)
  "TempLockUpLimit"    : 26           // (Number)
  "TempLockLowLimit"   : 20           // (Number)
  "ErrorCode"          : 0            // (Number)
}
```

Process flow :

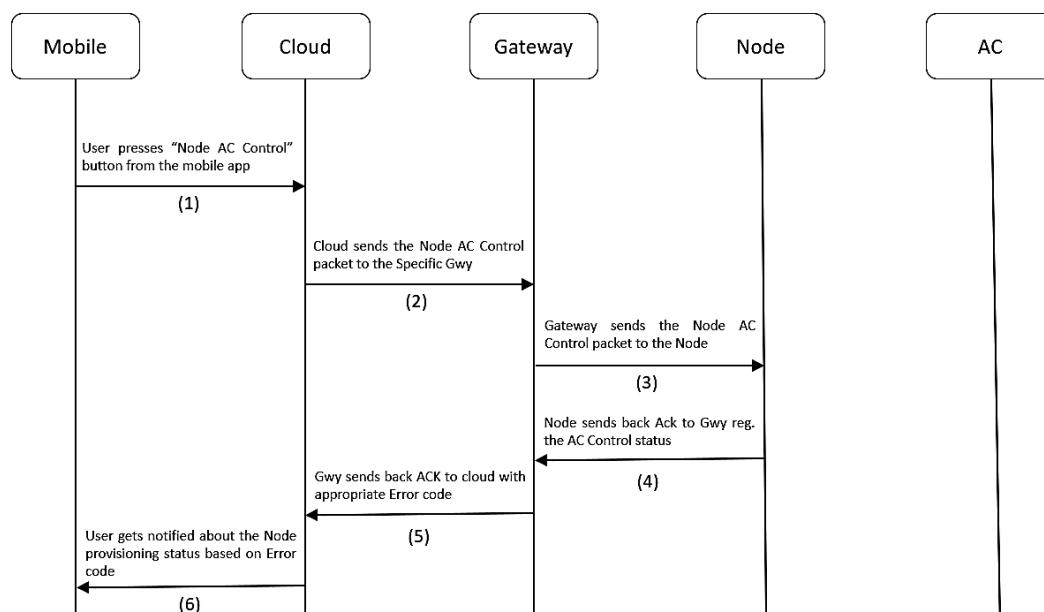


Figure 4.24 Node AC Control Process flow

4.4.25 Node AC manual control Ack

Description: This ack is used by cloud to know if someone tried to man

Node AC Locking JSON ACK (Node to Gateway to Cloud):

{		Range
"JsonPacketId" : 104	// (Number)	
"MsgSeqNo" : 12	// (Number)	
"GwySerNo" : "GWY00001"	// (String)	
"NodeSerNo" : "N00001"	// (String)	
"MacId" : "D3:F5:FB:CA:14:25"	// (String)	
"ElementAddr" : 23	// (Number)	[2 - 65535]
"ErrorCode" : 0	// (Number)	
}		

Process flow :

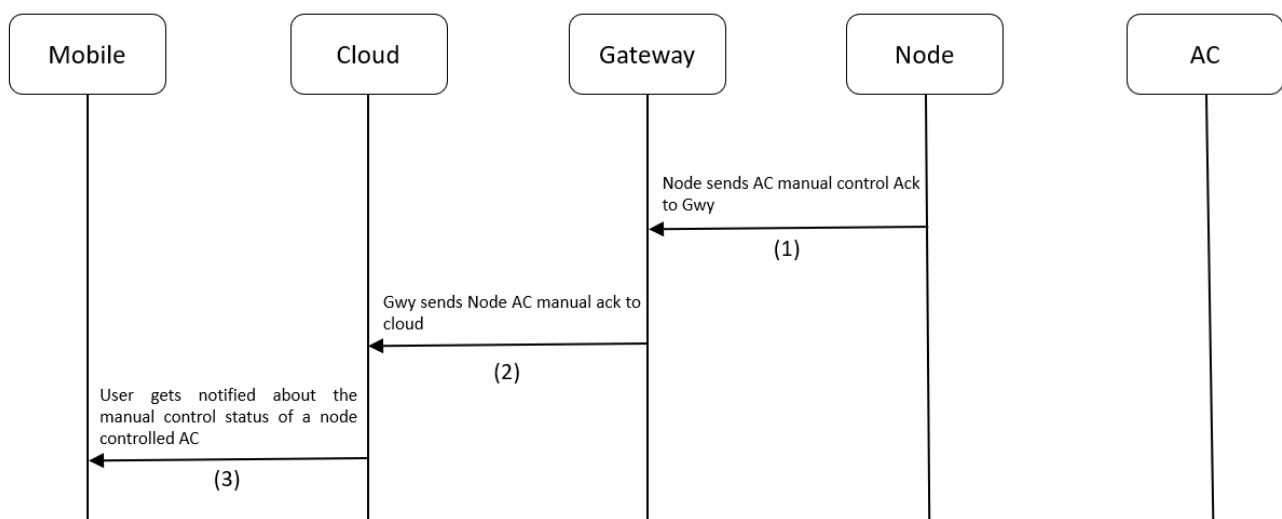


Figure 4.23 Node AC Locking Process flow

4.4.26 Node AC Remote Reconfiguration Packet

Description: This packet is used to reset the MQTT parameters saved in the Gateway. This puts the Node into AC Remote Configuration mode.

LED Indication: Slow Blinking BLUE (500ms ON | 500ms OFF)

Node AC Remote Reconfiguration JSON (Cloud to Gateway to Node):

		Range
{		
"JsonPacketId"	: 105 // (Number)	
"MsgSeqNo"	: 12 // (Number)	[0 – 65535]
"GwySerNo"	: "GWY00001" // (String)	[00000 - 99999]
"NodeSerNo:"	: "N00001" // (String)	
"ElementAddr"	: 23 // (Number)	
}		

Process flow :

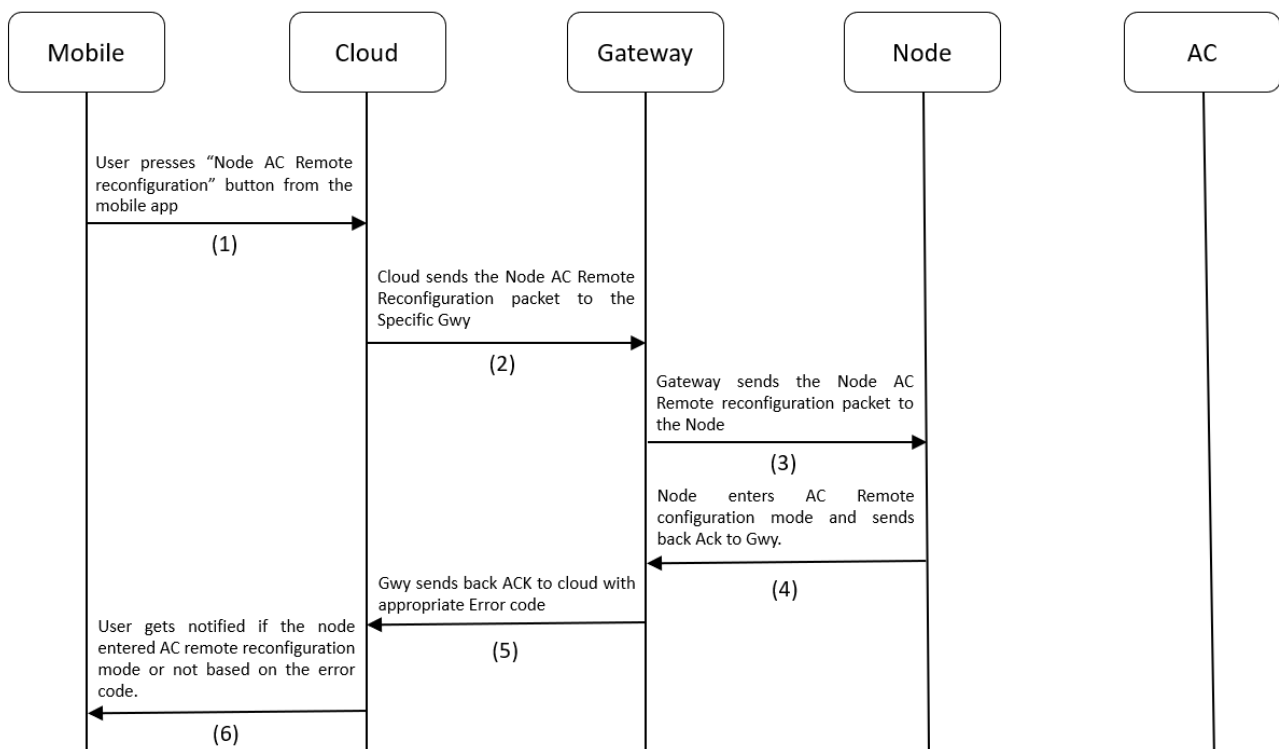


Figure 4.24 Node Reconfiguration Process flow

4.4.27 Node AC Remote Reconfiguration Ack

Description: This ack is used by cloud to know whether the node succesfully entered AC Remote configuration mode or not, after receving the Node AC Remote Reconfiguration Packet.

LED Indication: Slow Blinking BLUE (500ms ON | 500ms OFF)

Node Reconfiguration JSON ACK (Node to Gateway to Cloud):

{			Range
"JsonPacketId"	: 105	// (Number)	
"MsgSeqNo"	: 12	// (Number)	
"GwySerNo"	: "GWY00001"	// (String)	
"NodeSerNo:"	: "N00001"	// (String)	
"ElementAddr"	: 23	// (Number)	[2 - 65535]
"ErrorCode"	: 0	// (Number)	
}			

Process flow :

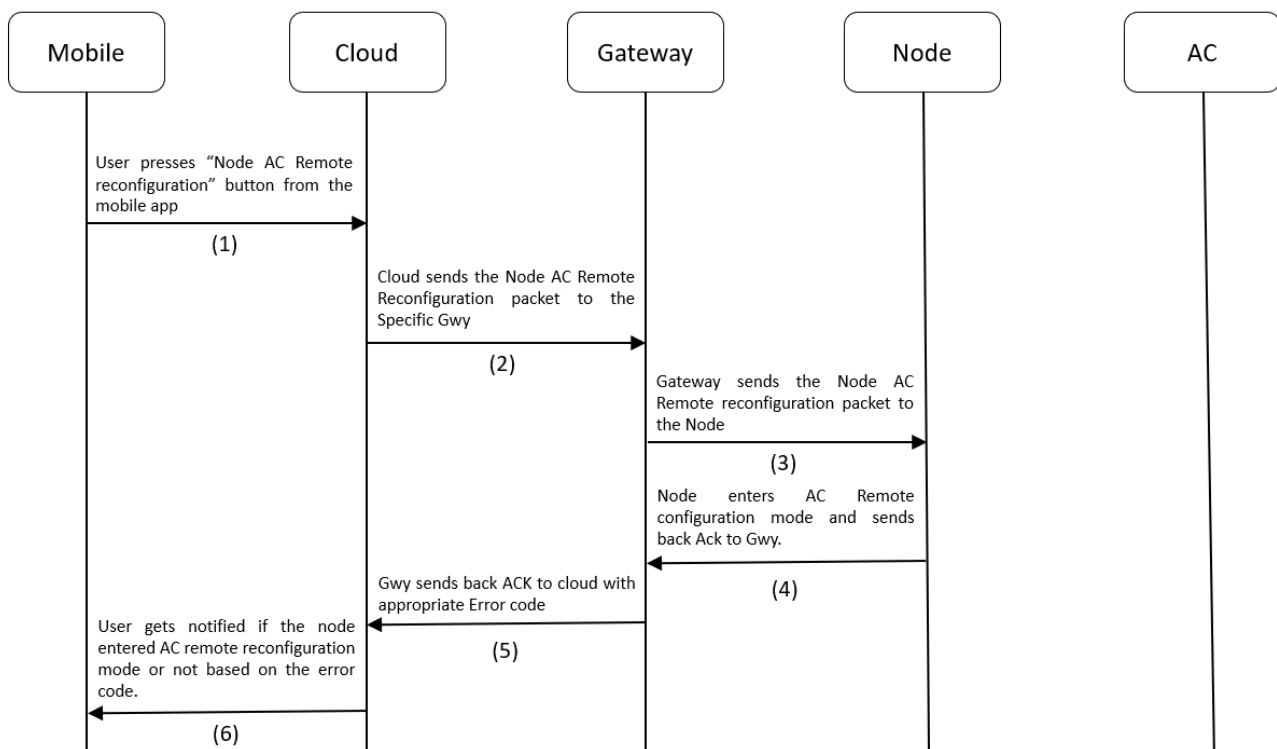


Figure 4.25 Node Reconfiguration Process flow

4.4.28 Node Temperature Data Ack

Description: This ACK is used by cloud to know the ambient temperature of the environment in which the Node is operating. This ACK is sent periodically to the Gwy to Cloud. This frequency can be configured in the Node Temperature Publish Configuration Packet

Note: This ACK is also used for Heartbeat purpose.

Node Temperature Data JSON ACK (Node to Gateway to Cloud):

		Range
{		
"JsonPacketId"	: 106 // (Number)	
"MsgSeqNo"	: 12 // (Number)	
"GwySerNo"	: "GWY00001" // (String)	
"NodeSerNo:"	: "N00001" // (String)	
"ElementAddr"	: 23 // (Number)	[2 - 65535]
"Temperature"	: 26 // (Number)	
}		

Process flow :

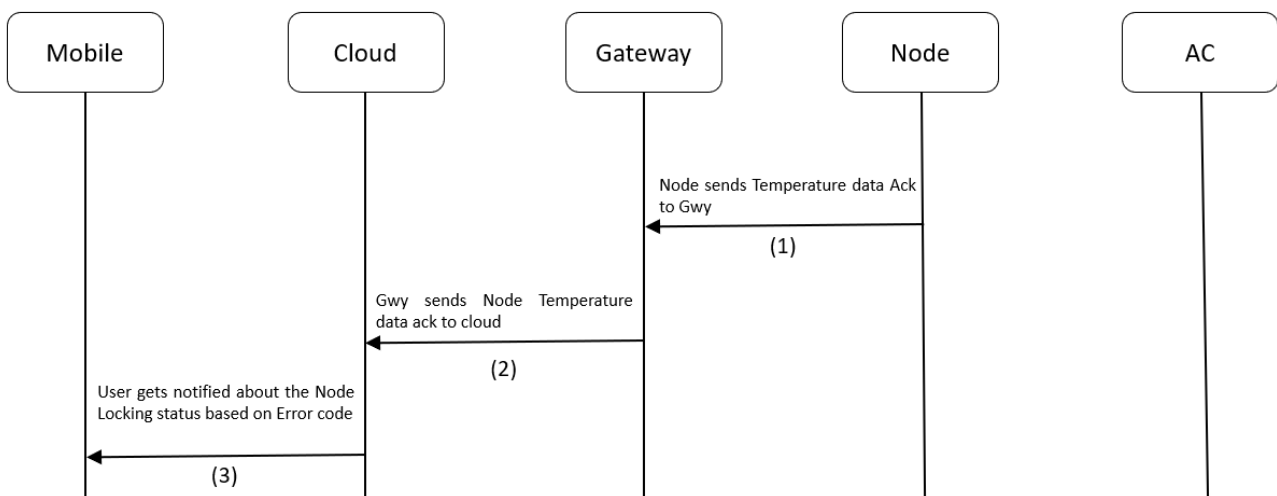


Figure 4.26 Node Temperature Data Process flow

4.4.29 Node Temperature Publish Configuration Packet

Description: This packet is used to tell the Node, how frequently It needs to send Temperature data ack to Gwy, so that Gwy can send it to Cloud.

Node Temperature Publish Configuration JSON (Cloud to Gateway):

			Range
{			
"JsonPacketId"	: 107	// (Number)	
"MsgSeqNo"	: 12	// (Number)	[0 – 65535]
"GwySerNo"	: "GWY00001"	// (String)	[00001 - 99999]
"NodeSerNo"	: "N00001"	// (String)	[00001 - 99999]
"ElementAddr"	: 23	// (Number)	[2 - 65535]
"PublishPeriodSec"	: 15	// (Number) (in sec)	[5 - 255]
}			

Process flow :

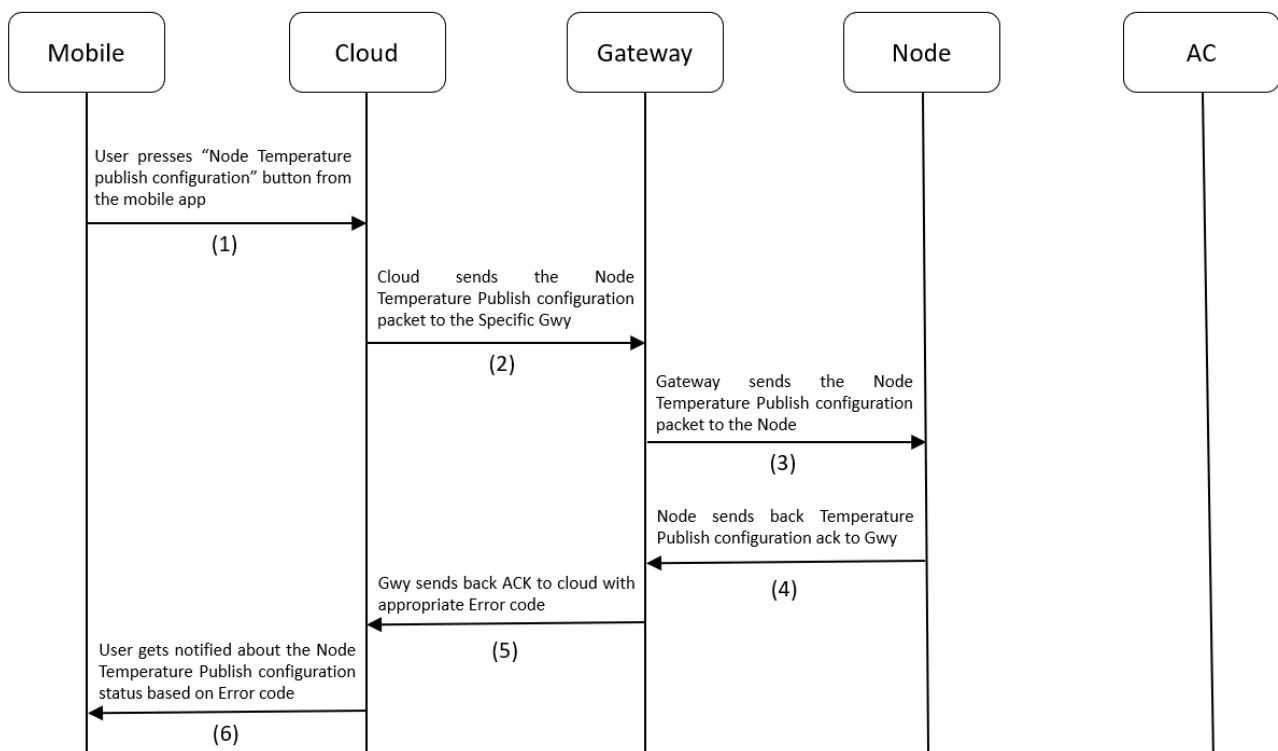


Figure 4.27 Node Publish Configuration process flow

4.4.30 Node Temperature Publish Configuration Ack

Description: This ack is used by cloud to know if the Node publish configuration was successful or not.

Node Publish Configuration JSON ACK (Node to Gateway to Cloud):

			Range
{			
"JsonPacketId"	: 107	// (Number)	
"MsgSeqNo"	: 12	// (Number)	
"GwySerNo"	: "GWY00001"	// (String)	
"NodeSerNo:"	: "N00001"	// (String)	
"ElementAddr"	: 23	// (Number)	[2 - 65535]
"PublishPeriodSec"	: 15	// (Number)	
"ErrorCode"	: 0	// (Number)	
}			

Process flow :

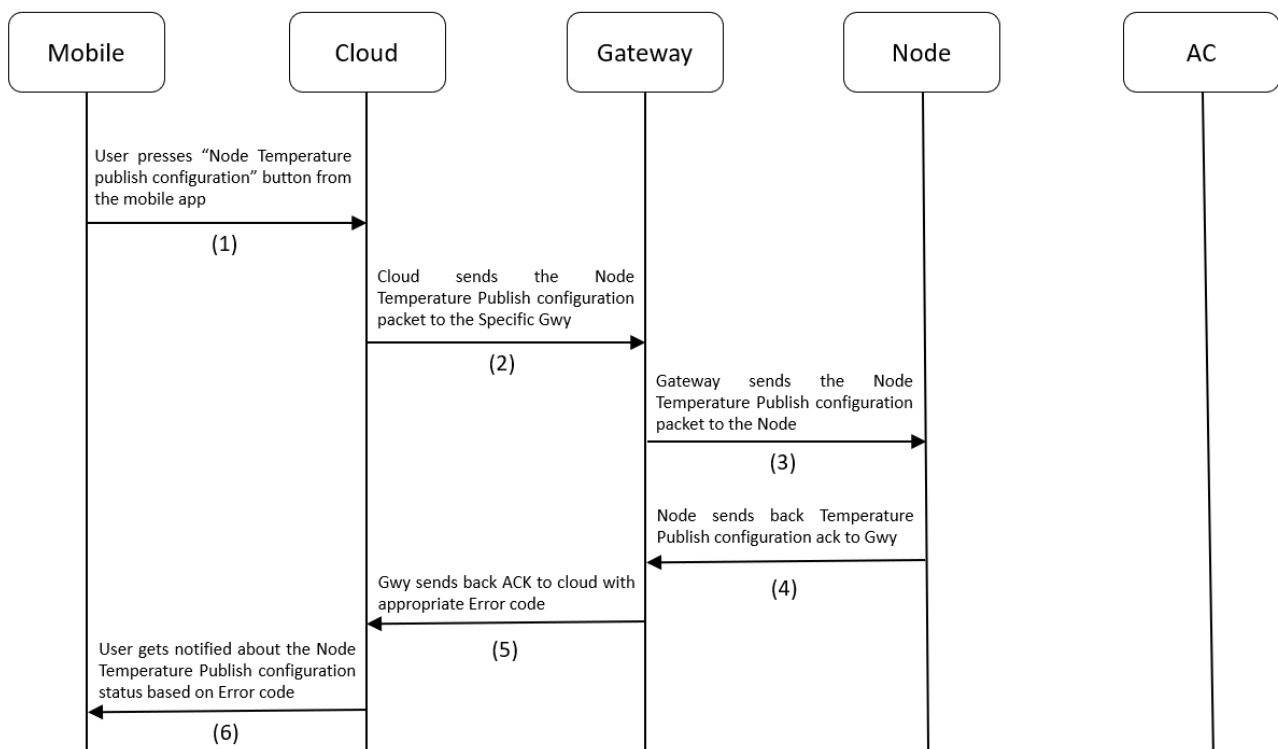


Figure 4.28 Node Publish Configuration process flow

~~~~~ End of Document ~~~~~