

Investigation of Total Collision Energy and Underlying Event Activity via Transverse Energy  
Measurements in Au+Au and p+p collisions at 200 GeV with the sPHENIX Detector

Emma McLaughlin

Submitted in partial fulfillment of the  
requirements for the degree of  
Doctor of Philosophy  
under the Executive Committee  
of the Graduate School of Arts and Sciences

COLUMBIA UNIVERSITY

2025

© 2025

Emma McLaughlin

All Rights Reserved

## Abstract

Investigation of Total Collision Energy and Underlying Event Activity via Transverse Energy

Measurements in Au+Au and p+p collisions at 200 GeV with the sPHENIX Detector

Emma McLaughlin

[illegible]

[illegible]

problem of the thesis/dissertation, (2) discuss the materials and methods used, and (3) state the conclusions reached. Individual chapters should not have abstracts.

## Table of Contents

Acknowledgments . . . . .	v
Dedication . . . . .	vi
Introduction or Preface . . . . .	1
Chapter 1: Introduction and Background . . . . .	2
1.1 Footnotes: Two ways of adding to your text . . . . .	2
1.2 Other section of first chapter . . . . .	2
Chapter 2: Experimental Detector Design . . . . .	3
2.1 Relativistic Heavy Ion Collider . . . . .	3
2.2 sPHENIX Detector . . . . .	3
2.2.1 sPHENIX Tracking System . . . . .	4
2.2.2 sPHENIX Calorimeter System . . . . .	6
2.2.3 sPHENIX Global Detectors . . . . .	7
2.2.4 sPHENIX Data Acquisition and Readout . . . . .	10
Chapter 3: sPHENIX Calorimeter Commissioning, Reconstruction and Calibration . . . . .	12
3.1 Real-time Calorimeter State Logging and Monitoring . . . . .	12
3.2 sPHENIX Low-Level Data Reconstruction . . . . .	12

3.2.1	Diagnosing ADC Bit Issues . . . . .	12
3.2.2	Online ADC Firmware Fixes . . . . .	12
3.2.3	Offline Reconstruction Software Fixes . . . . .	12
3.3	sPHENIX Calorimeter Calibration and Reconstruction Routines . . . . .	12
3.3.1	Calorimeter Tower Reconstruction . . . . .	12
3.3.2	EMCal Energy Calibration . . . . .	12
3.3.3	HCal Energy Calibration . . . . .	12
Chapter 4: Transverse Energy Density Measurements in Au+Au Collisions . . . . .		13
Chapter 5: Underlying Event Measurements in p+p Collisions . . . . .		16
Chapter 6: Last Chapter before conclusion . . . . .		17
Conclusion or Epilogue . . . . .		18
References . . . . .		22
Appendix A: Experimental Equipment . . . . .		23
Appendix B: Data Processing . . . . .		24

## List of Figures

2.1	Diagram of full array of sPHENIX physics program goals including measurements in jet structure, heavy flavor, quarkonia, bulk heavy ion physics and proton spin physics. . . . .	4
2.2	sPHENIX detector with subsystems labeled. . . . .	5
2.3	Schematic of sPHENIX ZDC detector shown from (a) collision region view and (b) "beam's eye" view to show the ZDC location past the RHIC DX dipole magnets and between the beam pipes. Also shown is the trajectory of beam fragments with neutrons measured in the region of the ZDC and protons deflected. Reproduced from [5]. . . . .	9



## List of Tables

1.1	This is an example Table. . . . .	2
-----	-----------------------------------	---

## **Acknowledgements**

Insert your acknowledgements text here. This page is optional, you may delete it if not needed.

## **Dedication**

Insert your dedication text here. This page is optional, you may delete it if not needed.

## **Introduction or Preface**

Insert your preface text here if applicable. This page is optional, you may delete it if not needed. If you delete this page make sure to move page counter comment in thesis.tex to correct location.

# Chapter 1: Introduction and Background

## 1.1 Footnotes: Two ways of adding to your text

<sup>1</sup>. Or it is possible to mark the location of a foot note with footnote mark command<sup>2</sup> then you can write the footnote in its own line for ease of reading.

## 1.2 Other section of first chapter

---

<sup>1</sup>By using footnote command and writing your note in the curly brackets

<sup>2</sup>You then use footnotetext command and then write you note in as if you are using regular footnote command as we did previously.

Table 1.1: This is an example Table.

x	f(x)	g(x)
1	6	4
2	6	3
3	6	2
4	6	2

## Chapter 2: Experimental Detector Design

### 2.1 Relativistic Heavy Ion Collider

### 2.2 sPHENIX Detector

The super Pioneering High Energy Nuclear Interaction eXperiment (sPHENIX) detector is located at RHIC and employs an array of central tracking, calorimeter and global event characterization subsystems in order to make measurements of the heavy ion and proton-proton collisions that occur from the RHIC beams. sPHENIX is the first general purpose detector to be built on a particle collider in the last decade and has been built with specific goals of measuring jets, heavy flavor and quarkonia at RHIC energies for direct comparison with measurements in the last decade from the LHC experiments. The full array of sPHENIX physics program goals can be found in Fig. 2.1.

sPHENIX began data taking in 2023 with a commissioning dataset of Au+Au collisions at  $\sqrt{s_{NN}} = 200$  GeV. In 2024, sPHENIX took its premiere physics dataset of p+p collisions at  $\sqrt{s} = 200$  GeV sampling over  $100 \text{ pb}^{-1}$  allowing for precision jet measurements in p+p collisions at RHIC energies. sPHENIX also collected an additional dataset of Au+Au collisions at  $\sqrt{s_{NN}} = 200$  GeV in 2024 intended for the commissioning of the tracking detectors with the calorimeter system and global detectors in full physics datataking mode. This Au+Au dataset was very useful in validating the calorimeter and jet reconstruction, calibration and preformance and provided confidence in the sPHENIX data collection and reconstruction prior to the sPHENIX high statistics flagship Au+Au dataset collected in 2025 sampling  $7 \text{ nb}^{-1}$ . The results shown in this thesis are from the 2024 p+p and Au+Au datasets.

sPHENIX has three main subsystem groups: a 4-part tracking system with a MAPS-based vertex detector (MVTX), an intermediate silicon tracker (INTT), the time projection chamber (TPC)

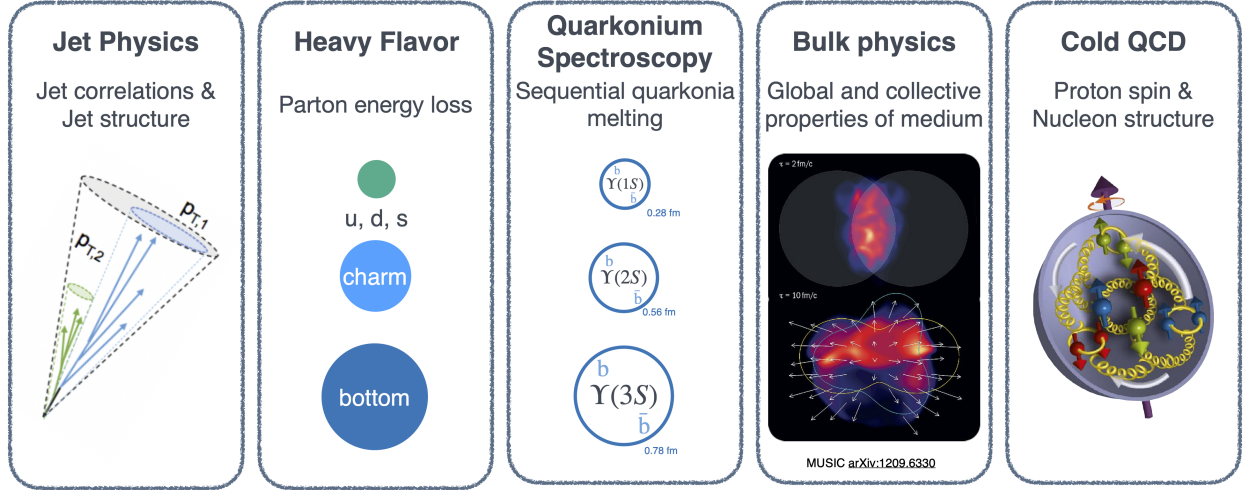


Figure 2.1: Diagram of full array of sPHENIX physics program goals including measurements in jet structure, heavy flavor, quarkonia, bulk heavy ion physics and proton spin physics.

and the TPC Outer Tracker (TPOT), a central barrel calorimeter system with three calorimeter layers of electromagnetic and hadronic calorimetry (EMCal, IHCAL and OHCAL), and global detectors including the Minimum Bias Detector (MBD), Zero Degree Calorimeters (ZDCs) and sPHENIX Event Plane Detector (sEPD). A rendering of the sPHENIX detector highlighting these subsystems with labels can be found in Fig. 2.2.

### 2.2.1 sPHENIX Tracking System

The sPHENIX tracking system comprises four subdetectors: a MAPS-based vertex detector (MVTX), an intermediate silicon tracker (INTT), the time projection chamber (TPC) and the TPC Outer Tracker (TPOT).

The MVTX is the innermost tracking subsystem, at a distance of 2-5 cm from the beam pipe, and is a 3 layer silicon barrel design with full azimuthal coverage ( $0 < \phi < 2\pi$ ) and pseudorapidity coverage of  $|\eta| < 1$ . Each layer of silicon barrel is composed of a set of staves, for a total of 48 staves, which each contain a hybrid integrated circuit with a flexible printed circuit connected to nine ALICE Pixel Detector (ALPIDE) pixel chip sensors, for a total of 432 ALPIDE sensors. The ALPIDE sensors are Monolithic Active Pixel Sensors (MAPS) that use Complementary Metal Oxide Semiconductor (CMOS) technology to build the pixel directly on the read out chip. The

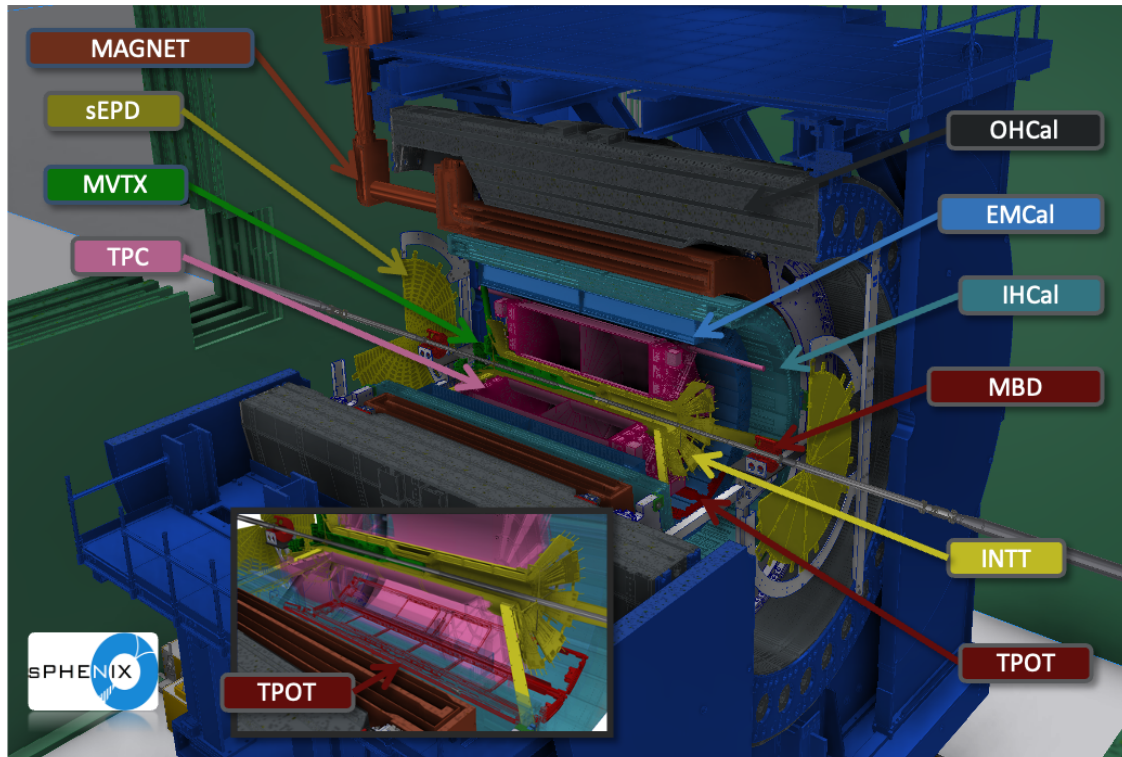


Figure 2.2: sPHENIX detector with subsystems labeled.

sensor consists of a silicon die of size 15 mm x 30 mm with an active p-doped epitaxial layer where charge is freed by an incoming particle and a set of charge collection diodes (pixels) with position resolution of  $30\ \mu\text{m}$  where the charge is then collected. Following collection, the sensors also amplify and digitize signals from each pixel and zero suppression is applied before read out.

Add in pictures of MVTX Add in reference for MVTX

The TPC is the main sPHENIX tracking subdetector, spanning in radial distance from 20 to 80 cm with

Gaseous Drift Detectors - Big cylinder filled with (mostly) noble gas (Ne, Ar, etc...) and electric field - Particles come in, ionize gas, make electrons (and ions) - Electrons drift to anode plane – are read out



### 2.2.2 sPHENIX Calorimeter System

sPHENIX has three central barrel calorimeter layers, an electromagnetic calorimeter (EMCal), an inner hadronic calorimeter (IHCAL) and an outer hadronic calorimeter (OHCAL). **Add in sentence about calorimeter necessary for jet physics goals** These detectors are concentric and sandwich the sPHENIX magnet with the EMCal located closest to the interaction point and the OHCAL located further from the interaction point within the calorimeter system. Further, these detectors have full azimuthal coverage ( $0 < \phi < 2\pi$ ) and pseudorapidity coverage of  $|\eta| < 1.1$ .

The sPHENIX EMCal is designed to precisely measure photons, electrons and positrons via electromagnetic showers. To achieve this goal, the EMCal has a depth of 18 radiation lengths and its electromagnetic shower resolution was measured in beam tests to be  $2.8\% \oplus 15.5\%/\sqrt{E}$  for electrons [1, 2]. The EMCal is also nearly one nuclear interaction length in depth and therefore sees a substantial amount of energy in the ion collisions from hadronic showers as well. The sPHENIX EMCal is a compact sampling calorimeter; it is located just outside of the TPC/TPOT with an inner radius of 90 cm and the EMCal and IHCAL combined are constrained to fit within the repurposed Babar magnet. The EMCal uses a tungsten powder absorber, which has a small Moliere radius and large particle stopping power. This allows the EMCal to have a large number of radiation lengths and precision position resolution while still being compact. Scintillating fibers embedded within the tungsten powder collect and transmit light to a lightguide on the front of each EMCal block (size 2x2 towers). Following collection by the lightguide, the signals are processed by Silicon Photomultipliers (SiPMs), which convert the light to electric current, and passed through a pre-amplifier. The analog voltage signals are then passed to the Analog-Digital Converters as the start of the sPHENIX calorimeter data acquisition system. The EMCal is composed of 64 sectors, 2 sectors in  $\eta$  and 32 sectors in  $\phi$ , with each sector containing 384 towers for a total of 24,576 EMCal towers of tower size  $\Delta\eta \times \Delta\phi = 0.024 \times 0.024$ . Each sector has six interface boards used to communicate with the detector for setting and monitoring the detector state, including information about the SiPM temperatures, bias voltage and offsets supplied to the SiPMs, leakage current, and detector gain. These slow control communication boards are also used for detector commissioning

tasks such as turning on and pulsing LED and test pulses for calibration runs.

The sPHENIX HCal system is the first central barrel hadronic calorimeter on a detector at RHIC and allows for full jet reconstruction with both electromagnetic and hadronic calorimetry at RHIC energies for the first time. sPHENIX is designed to measure hadronic showers with the full calorimeter system totaling a depth of 5 nuclear interaction lengths and having a hadron resolution response in beam tests of  $13.5\% \oplus 64.9\%/\sqrt{E}$  [2]. The HCal system is split into two layers, the IHCal and OHCal, separated by the Babar superconducting magnet repurposed for sPHENIX. The IHCal is located between the EMCal and the magnet with an inner radius of ??? cm and the OHCal is located outside of the magnet acting as the magnet flux return with an inner radius of ??? cm and an outer radius of ??? cm. The IHCal (OHCal) are sampling calorimeters composed of aluminum (steel) absorber plates and 4 (5) scintillating tiles set at an angle offset to the transverse direction to reduce the amount of collision particles that do not interact with the active volumes of these calorimeters. Wavelength shifting fibers are embedded within the scintillating tiles which collect and transmit the produced light to SiPMs. The SiPMs process this light into voltage signals which is then amplified and digitized in the same manner as for the EMCal. Both the IHCal and OHCal contain 32 sectors split into North and South half-sector sides and each sector contains 48 towers for a total of 1536 towers of tower size  $\Delta\eta \times \Delta\phi = 0.01 \times 0.01$ . Each half sector has one interface and slow control communication board and these are also used to set and monitor the detector state including SiPM temperatures, bias voltages and offsets, leakage current and detector gain.

### 2.2.3 sPHENIX Global Detectors

sPHENIX contains several global detectors used to provide minimum bias event triggering and total event characterization information such as the vertex of the collision event and centrality of the event. These detectors include the Minimum Bias Detector (MBD), Zero Degree Calorimeters (ZDCs) and sPHENIX Event Plane Detector (sEPD).

The MBD is located at forward rapidity,  $3.51 < |\eta| < 4.61$ , on both the north and south side of the interaction point, close to the beam pipe, and is repurposed from the PHENIX Beam Beam

Counter (BBC) with updated trigger and readout electronics, where it was located in a different position  $3.0 < |\eta| < 3.9$  along the beam line [3, 4]. Each side of the MBD contains a set of 64 1-in diameter mesh-dynode photomultiplier tubes (PMT) and the front of these PMTs are connected with a 3 cm quartz Cherenkov radiator to detect charged particles via Cherenkov radiation. During both PHENIX and sPHENIX running, the MBD has been located close to the beam pipe and is subject to high levels of radiation during data taking. In its original design, quartz was selected for the radiator material and PMTs for signal amplification due to their radiation hardness and over the data taking lifetime of the MBD, the subsystem has not seen any significant degradation due to radiation damage. The MBD is used for online triggering of hadronic interactions and offline to provide a selection of minimum-bias (MB) events and centrality determination in heavy-ion collisions. It is also used for the offline reconstruction of the collision z-vertex position using the arrival time difference between the first charged particles detected by the PMTs on the north and south side of the interaction point.

The ZDCs [5] are located on both sides of the interaction point at very forward rapidity, 18 m from the interaction point, and are also repurposed from the PHENIX detector. They are sampling hadronic calorimeters composed of three modules made of tungsten alloy and PMMA optical fiber with a total of 5.1 nuclear interaction lengths (149 radiation lengths). Utilizing their very forward location, the ZDCs are able to detect beam fragment neutrons of the collision without additional backgrounds from produced particles and secondaries from the collision. A schematic showing how the sPHENIX ZDC detector measures these beam fragment neutrons while not being sensitive to beam fragment charged particles can be found in Fig. 2.3. The total energy of the neutrons are measured in the ZDCs via the transmission of Cherenkov radiation from the neutron's hadronic showers by PMMA fibers to PMTs. Each side of the ZDC is calibrated by requiring that the peak in the measured energy distribution which corresponds to the energy deposition of a single neutron is set at the nominal beam energy value of 100 GeV. Additionally, specifically in sPHENIX, criteria on signals in both sides of the ZDC are included in the minimum bias event selection to separate hadronic interactions from beam backgrounds like beam-gas interactions.

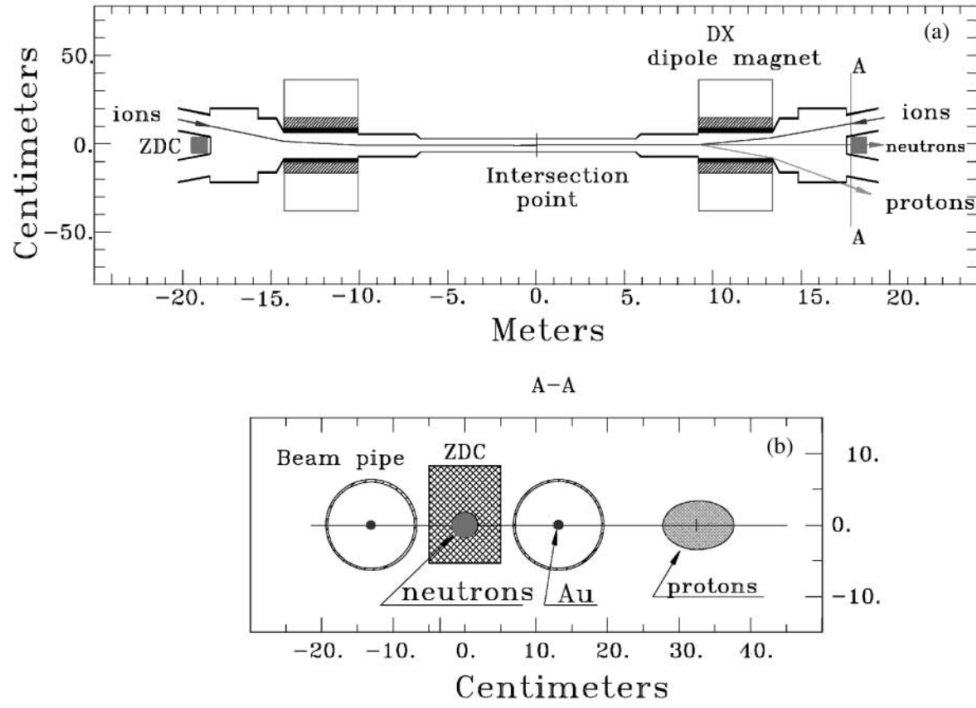


Figure 2.3: Schematic of sPHENIX ZDC detector shown from (a) collision region view and (b) "beam's eye" view to show the ZDC location past the RHIC DX dipole magnets and between the beam pipes. Also shown is the trajectory of beam fragments with neutrons measured in the region of the ZDC and protons deflected. Reproduced from [5].

## The sEPD

### 2.2.4 sPHENIX Data Acquisition and Readout

sPHENIX is designed with a state of the art data acquisition system and computing resources to collect data at very high rates which is necessary to achieve its data-intensive physics goals within its short three year running period. The sPHENIX data acquisition system is designed to readout data from triggered calorimeter events at a rate of 15 kHz in both p+p and Au+Au collisions and read out tracking detectors in full streaming mode collecting all of the supplied collision data. With the high collision rate ( $\gg 15$  kHz) supplied by RHIC, the sPHENIX trigger system is used to make decisions using information from the calorimeter and global detectors on whether to read out a particular collision event. This trigger system uses calorimeter information to identify and save likely high  $p_T$  photon and jet events and uses the global detectors to identify and save minimum bias hadronic collision events.

The triggered calorimeter and global detector data is read out by going through in five steps: first the front end modules (FEM) which digitize the analog signals from the SiPMs and PMTs in the detectors, second the data collection modules (DCMs) which combine data from multiple FEMs and act as very short term buffers, the data is then passed through the sub event buffer (SEB) computers used to store the data temporarily, and then is transferred to bufferboxes, before finally being written to disk storage. The tracking data is read out from the front end electronics (FEEs) through the ATLAS "FELIX" card which is connected directly to a standard computer which serves as a buffer similar to the triggered SEBs. The tracking data is also transferred to bufferboxes and written to disk storage in the same manner as the triggered data.

The Really Cool Data Acquisition (RCDAQ) system is used to control and coordinate the entire sPHENIX data acquisition and readout process. The RCDAQ coordinates the start and stop of all of sPHENIX's independent read out data streams and transmission of data of variable types with fixed packet sizes through the different stages of buffer computers. This is necessary to ensure that all subsystems are synchronized in their read out and is especially important since in sPHENIX all

subsystem components have independent data stream read out and there is no online event building. Via the transmission of data packets with fixed sizes, the RCDAQ is also able develop a controlled and steady flow for the data through the read out system.

## **Chapter 3: sPHENIX Calorimeter Commissioning, Reconstruction and Calibration**

### **3.1 Real-time Calorimeter State Logging and Monitoring**

### **3.2 sPHENIX Low-Level Data Reconstruction**

#### 3.2.1 Diagnosing ADC Bit Issues

#### 3.2.2 Online ADC Firmware Fixes

#### 3.2.3 Offline Reconstruction Software Fixes

### **3.3 sPHENIX Calorimeter Calibration and Reconstruction Routines**

#### 3.3.1 Calorimeter Tower Reconstruction

#### 3.3.2 EMCal Energy Calibration

#### 3.3.3 HCal Energy Calibration

## **Chapter 4: Transverse Energy Density Measurements in Au+Au Collisions**

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit



esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris

nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum..

## **Chapter 5: Underlying Event Measurements in p+p Collisions**

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

## **Chapter 6: Last Chapter before conclusion**

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

## Conclusion or Epilogue

[illegible]

[illegible]

[illegible]

[illegible]



## References

- [1] C. A. Aidala, S. Altaf, R. Belmont, S. Boose, D. Cacace, M. Connors, E. Desmond, J. Frantz, E. A. Gamez, N. Grau, J. S. Haggerty, A. Hodges, J. Huang, Y. Kim, M. D. Lenz, W. Lenz, N. A. Lewis, E. J. Mannel, J. D. Osborn, D. V. Perepelitsa, M. Phipps, R. Pisani, S. Polizzo, A. Pun, M. L. Purschke, C. Riedl, T. Rinn, A. C. Romero Hernandez, M. Sarsour, Z. Shi, A. M. Sickles, C. Smith, S. Stoll, X. Sun, E. Thorsland, F. Vassalli, X. Wang, and C. L. Woody, “Design and beam test results for the 2-d projective sphenix electromagnetic calorimeter prototype,” *IEEE Transactions on Nuclear Science*, vol. 68, no. 2, pp. 173–181, 2021.
- [2] C. A. Aidala, V. Bailey, S. Beckman, R. Belmont, C. Biggs, J. Blackburn, S. Boose, M. Chiu, M. Connors, E. Desmond, A. Franz, J. S. Haggerty, X. He, M. M. Higdon, J. Huang, K. Kauder, E. Kistenev, J. LaBounty, J. G. Lajoie, M. Lenz, W. Lenz, S. Li, V. R. Loggins, E. J. Mannel, T. Majoros, M. P. McCumber, J. L. Nagle, M. Phipps, C. Pinkenburg, S. Polizzo, C. Pontieri, M. L. Purschke, J. Putschke, M. Sarsour, T. Rinn, R. Ruggiero, A. Sen, A. M. Sickles, M. J. Skoby, J. Smiga, P. Sobel, P. W. Stankus, S. Stoll, A. Sukhanov, E. Thorsland, F. Toldo, R. S. Towell, B. Ujvari, S. Vazquez-Carson, and C. L. Woody, “Design and beam test results for the sphenix electromagnetic and hadronic calorimeter prototypes,” *IEEE Transactions on Nuclear Science*, vol. 65, no. 12, pp. 2901–2919, 2018.
- [3] M. Allen, M. Bennett, M. Bobrek, J. Boissevain, S. Boose, E. Bosze, C. Britton, J. Chang, C. Chi, M. Chiu, R. Conway, R. Cunningham, A. Denisov, A. Deshpande, M. Emery, A. Enokizono, N. Ericson, B. Fox, S.-Y. Fung, P. Giannotti, T. Hachiya, A. Hansen, K. Homma, B. Jacak, D. Jaffe, J. Kang, J. Kapustinsky, S. Kim, Y. Kim, T. Kohama, P. Kroon, W. Lenz, N. Longbotham, M. Musrock, T. Nakamura, H. Ohnishi, S. Ryu, A. Sakaguchi, R. Seto, T. Shiina, M. Simpson, J. Simon-Gillo, W. Sondheim, T. Sugitate, J. Sullivan, H. van Hecke, J. Walker, S. White, P. Willis, and N. Xu, “Phenix inner detectors,” *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 499, no. 2, pp. 549–559, 2003, The Relativistic Heavy Ion Collider Project: RHIC and its Detectors.
- [4] K. Ikematsu, Y. Iwata, K. Kaimi, M. Kaneta, T. Kohama, N. Maeda, K. Matsukado, H. Ohnishi, K. Ono, A. Sakaguchi, T. Sugitate, Y. Sumi, Y. Takata, M. Tanabe, and A. Yokoro, “A start-timing detector for the collider experiment phenix at rhic-bnl,” *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 411, no. 2–3, pp. 238–248, Jul. 1998.
- [5] C. Adler, A. Denisov, E. Garcia, M. Murray, H. Stroebele, and S. White, “The rhic zero degree calorimeters,” *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 470, no. 3, pp. 488–499, 2001.

## **Appendix A: Experimental Equipment**

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

## **Appendix B: Data Processing**

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.