The Processor: Multi-Cycle & Single Pipeline, ALU, Data Hazard

Dr. Vincent C. Emeakaroha

22-02-2017

vc.emeakaroha@cs.ucc.ie

Multi-Cycle Pipeline Diagram

- Form showing resource usage

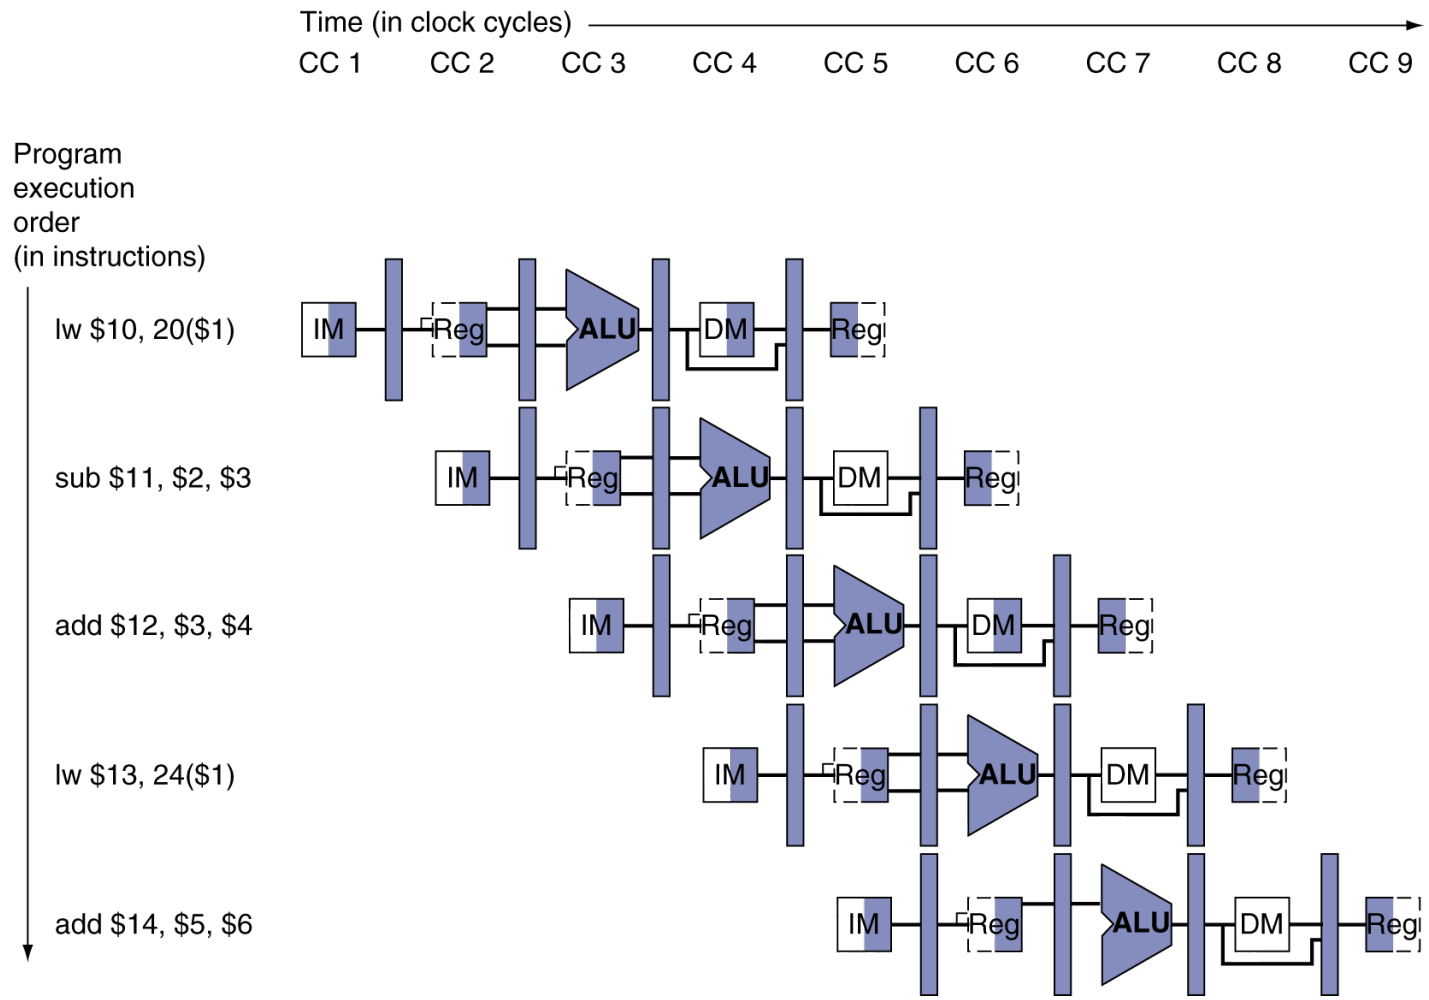

Multi-Cycle Pipeline Diagram

- Traditional form

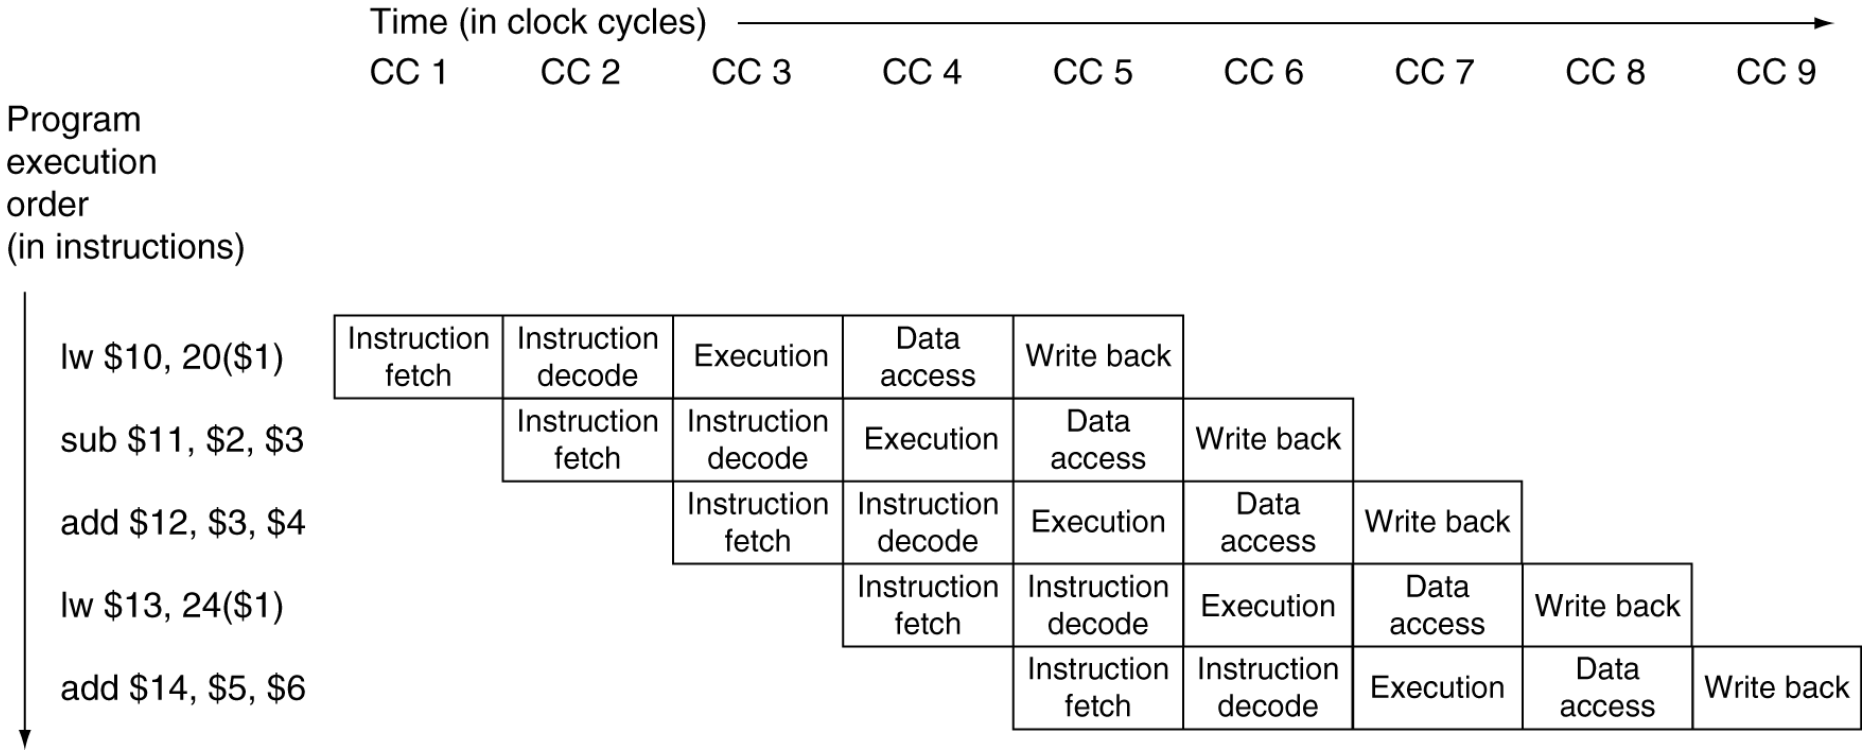

Single-Cycle Pipeline Diagram

- State of pipeline in cycle stage 5 from multi-cycle diagram

add $14, $5, $6	lw $13, 24 ($1)	add $12, $3, $4	sub $11, $2, $3	lw $10, 20($1)
Instruction fetch	Instruction decode	Execution	Memory	Write-back

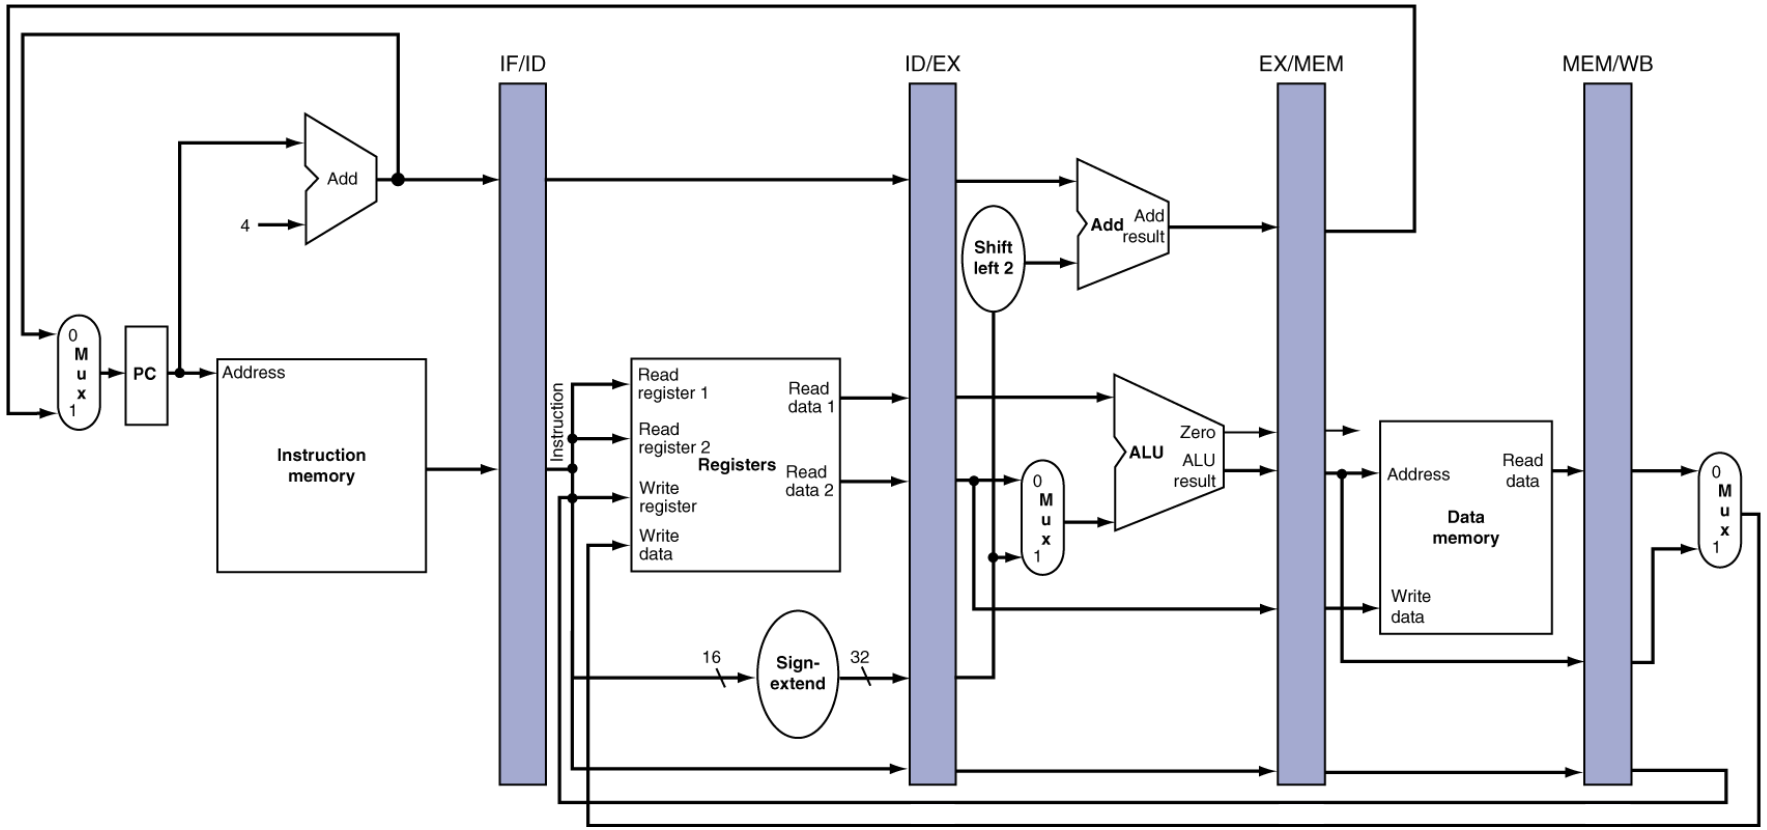

Pipelined Control (Simplified)

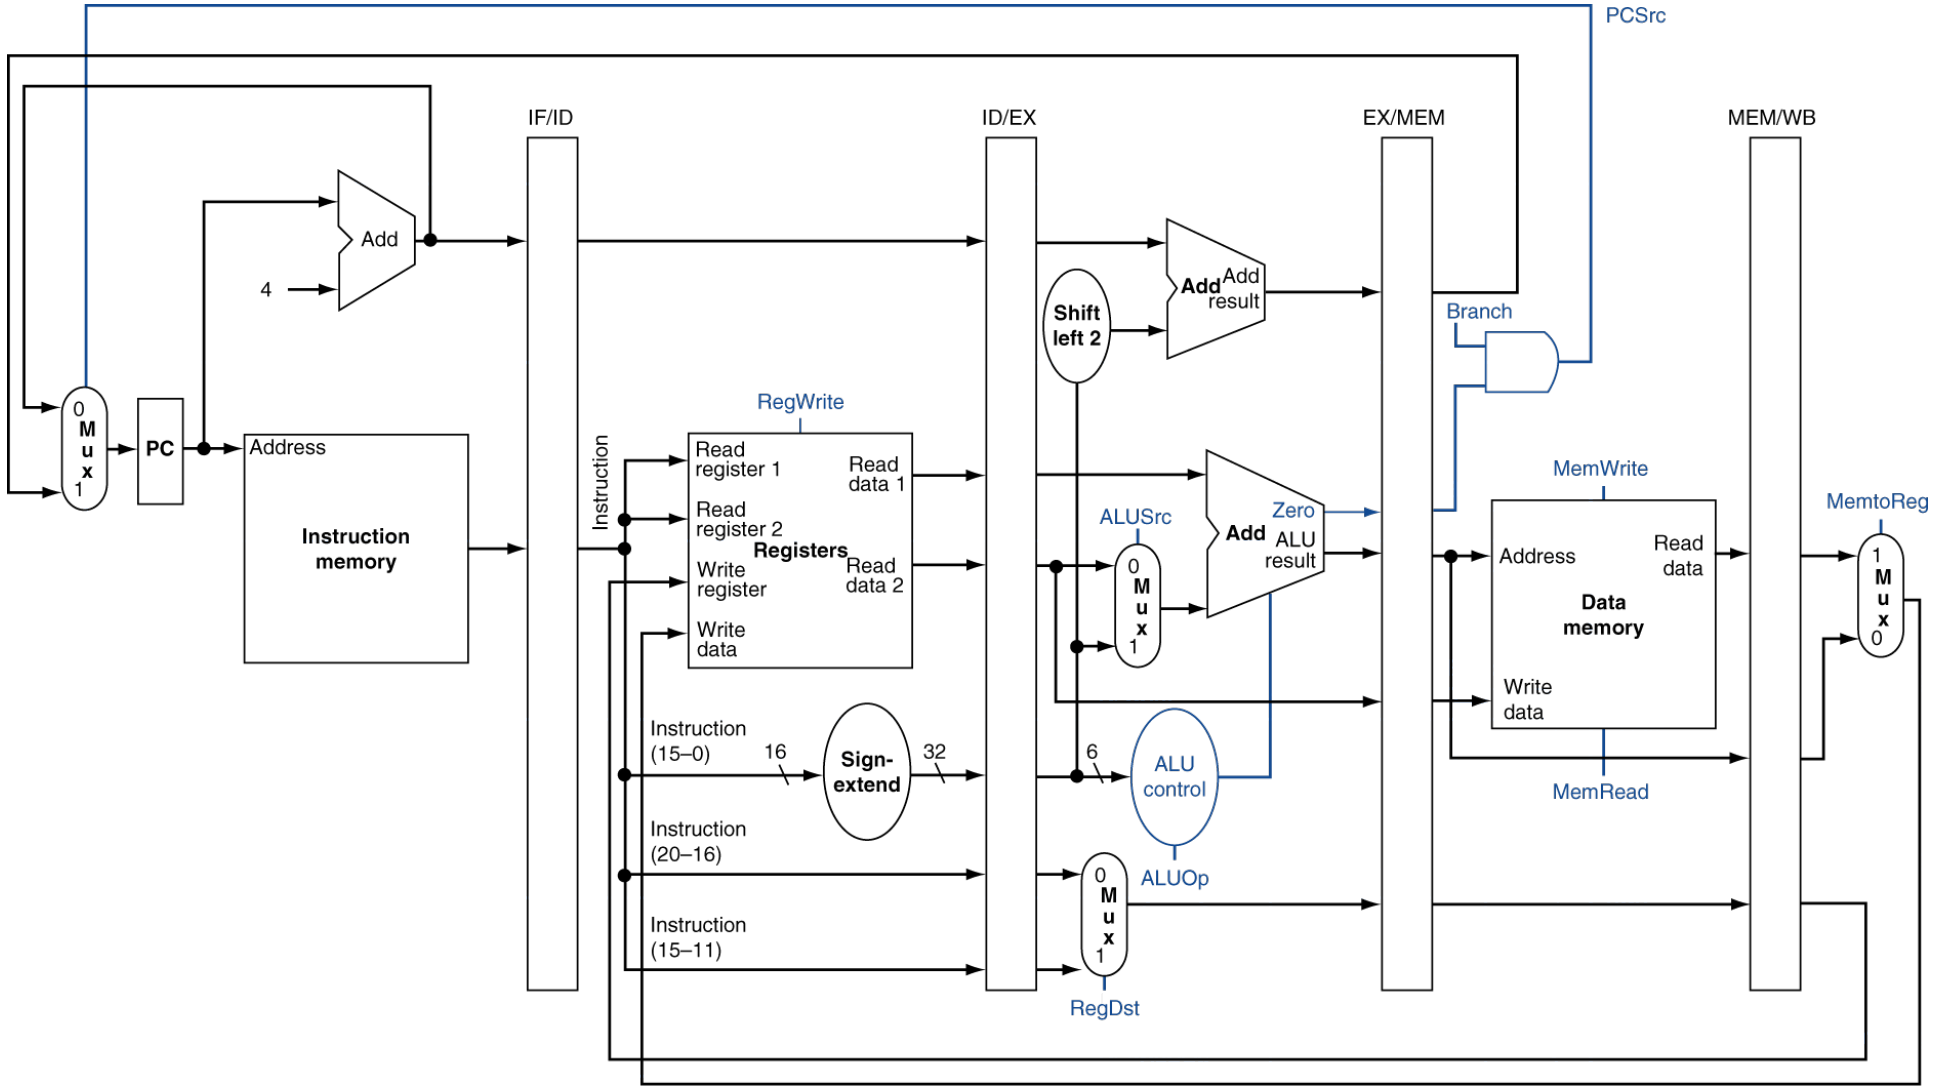

Pipelined Control

- Control signals derived from instruction
  - Control lines start with execution stage

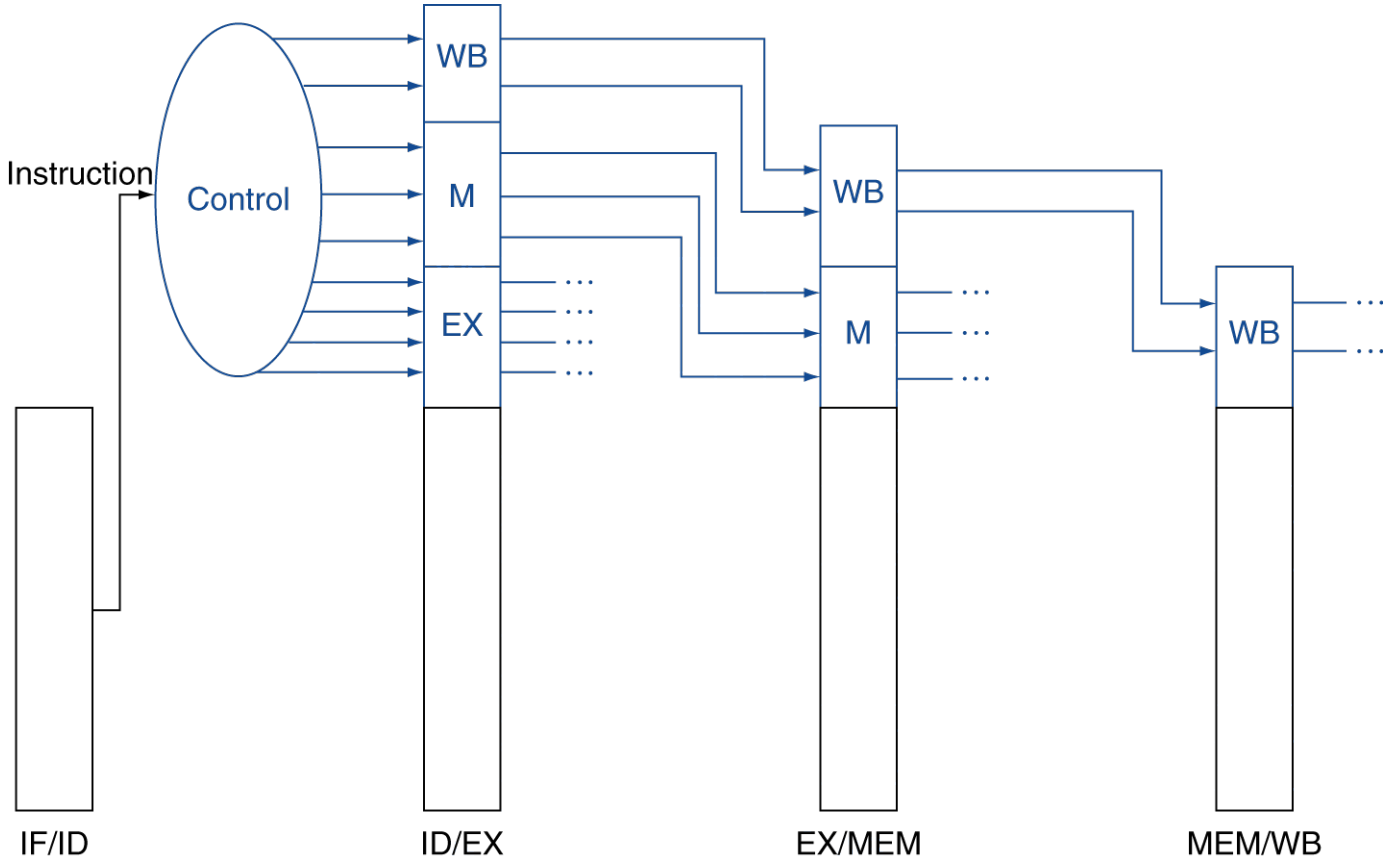

Pipelined Control

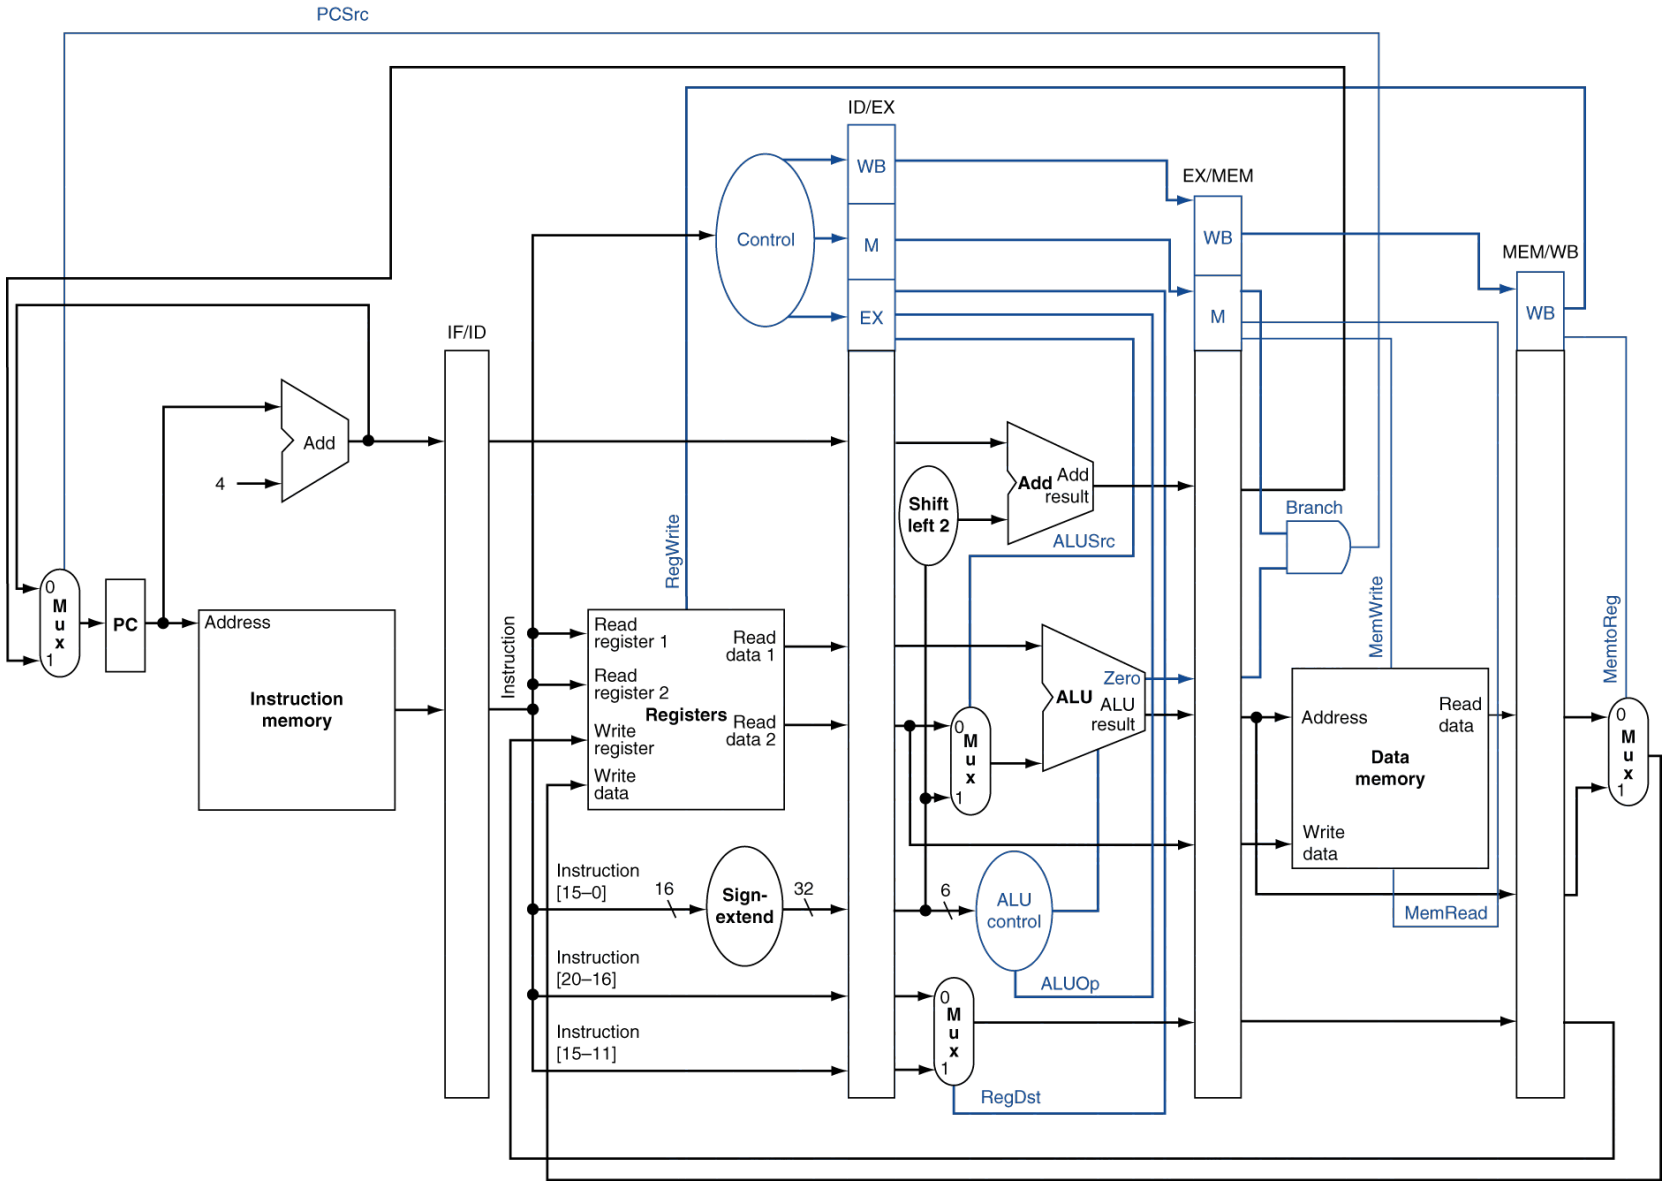

Data Hazards in ALU Instructions

- Consider this sequence with many dependences:

```
sub $2, $1,$3
and $12,$2,$5
or  $13,$6,$2
add $14,$2,$2
sw  $15,100($2)
```

- We can resolve hazards with forwarding
  - How do we detect when to forward?
- Assuming $2 has the value
  - 10 before the subtraction
  - -20 after the subtraction

Dependencies & Forwarding

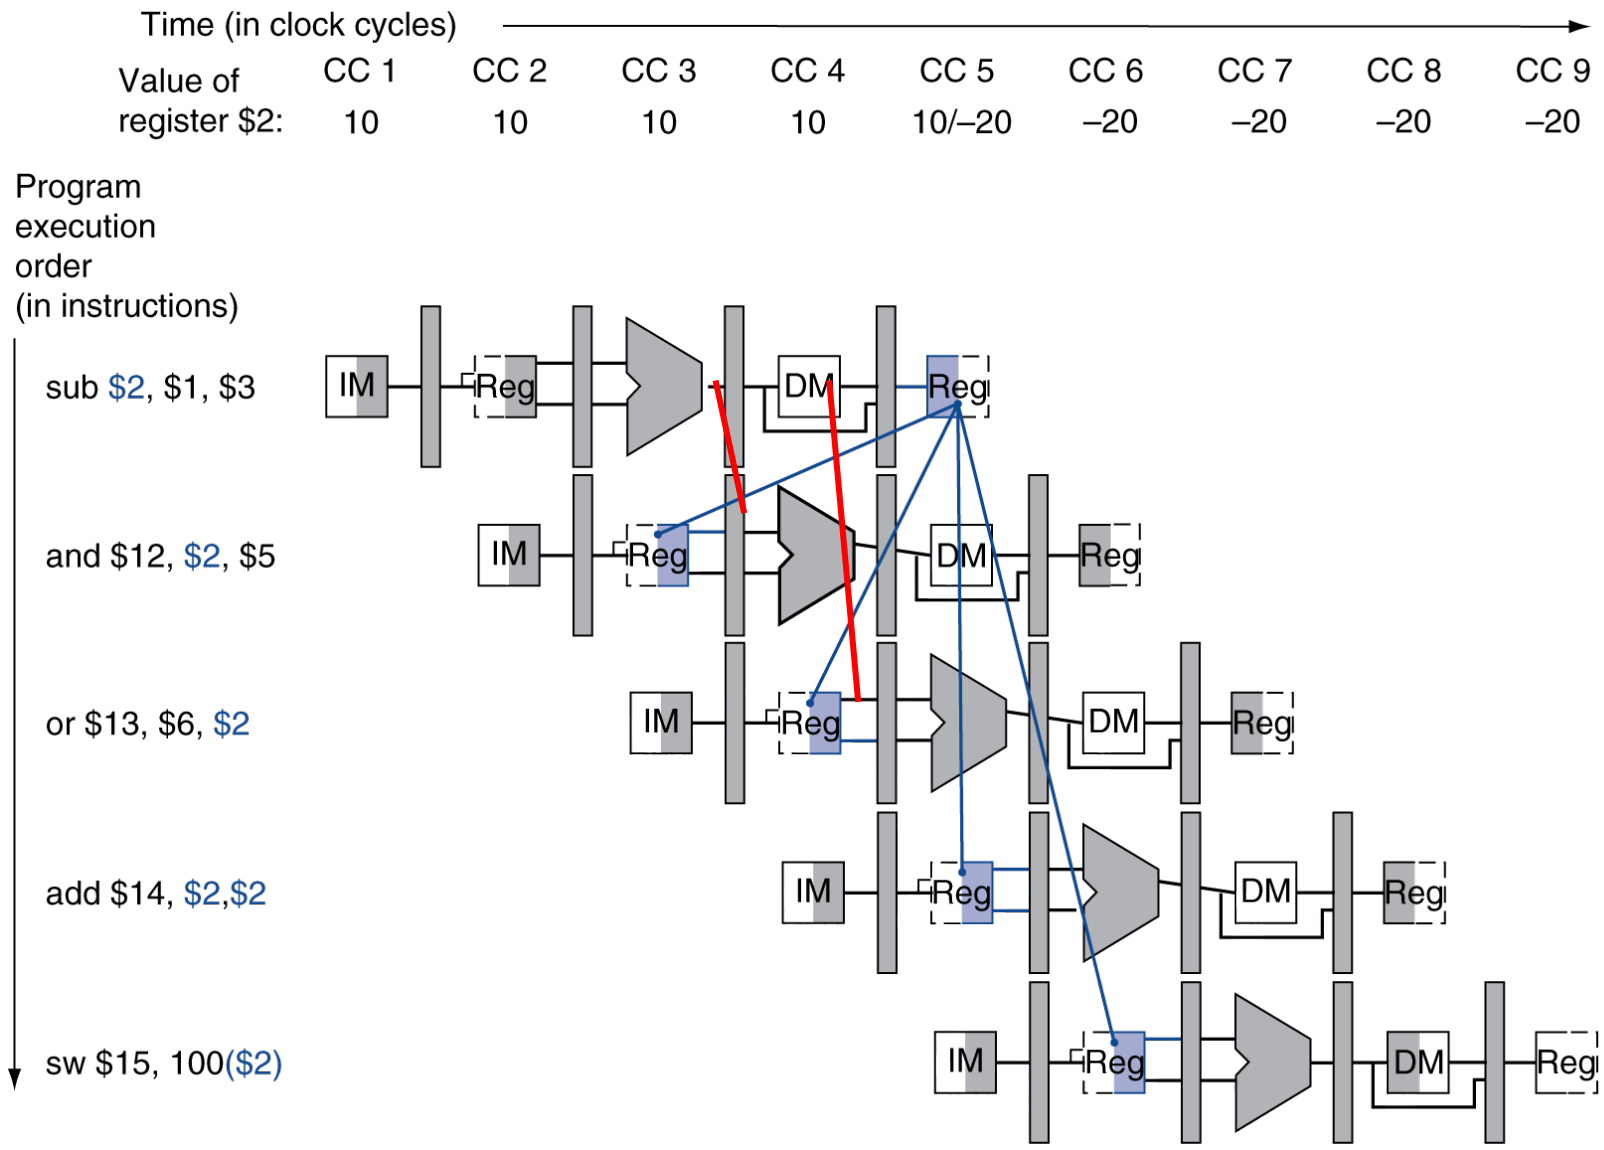

Detecting the Need to Forward

- Pass register numbers along pipeline
  - e.g., ID/EX.RegisterRs = register number for Rs sitting in ID/EX pipeline register
- ALU operand register numbers in EX stage are given by
  - ID/EX.RegisterRs, ID/EX.RegisterRt
- Data hazards when
  - 1a. EX/MEM.RegisterRd = ID/EX.RegisterRs
  - 1b. EX/MEM.RegisterRd = ID/EX.RegisterRt
  - 2a. MEM/WB.RegisterRd = ID/EX.RegisterRs
  - 2b. MEM/WB.RegisterRd = ID/EX.RegisterRt

Fwd from EX/MEM pipeline reg

Fwd from MEM/WB pipeline reg

Detecting the Need to Forward

- But only if forwarding instruction will write to a register!
  - EX/MEM.RegWrite, MEM/WB.RegWrite
- And only if Rd for that instruction is not $zero
  - EX/MEM.RegisterRd ≠ 0,
    MEM/WB.RegisterRd ≠ 0
- Recall in MIPS every use of $zero ($0) as operand yields an operand value of 0
  - Example: sll $0, $1, 2
  - The output of this instruction is 0

Forwarding Conditions

- EX hazard
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 10
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 10
- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

Forwarding Paths

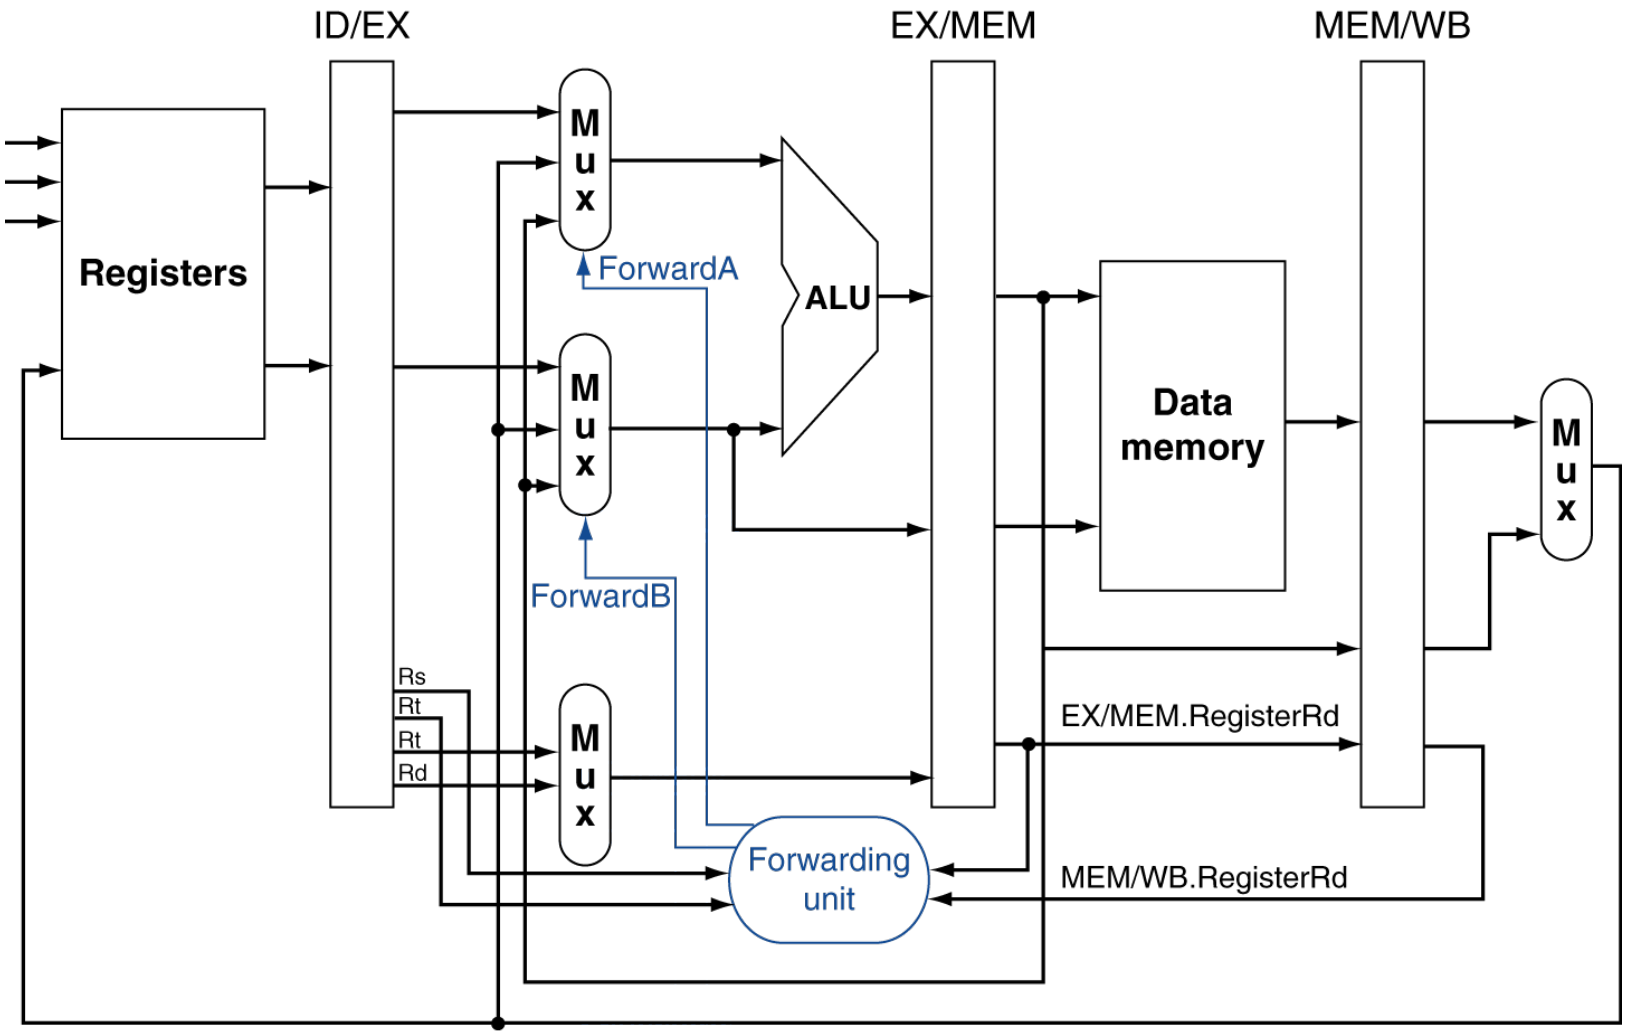

b. With forwarding

Double Data Hazard

- Consider the sequence:

```
add $1,$1,$2
add $1,$1,$3
add $1,$1,$4
```

- Both hazards occur
  - Want to use the most recent result at MEM stage
- Revise MEM hazard condition
  - Only fwd if EX hazard condition isn't true

Revised Forwarding Condition

- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

Datapath with Forwarding and Control

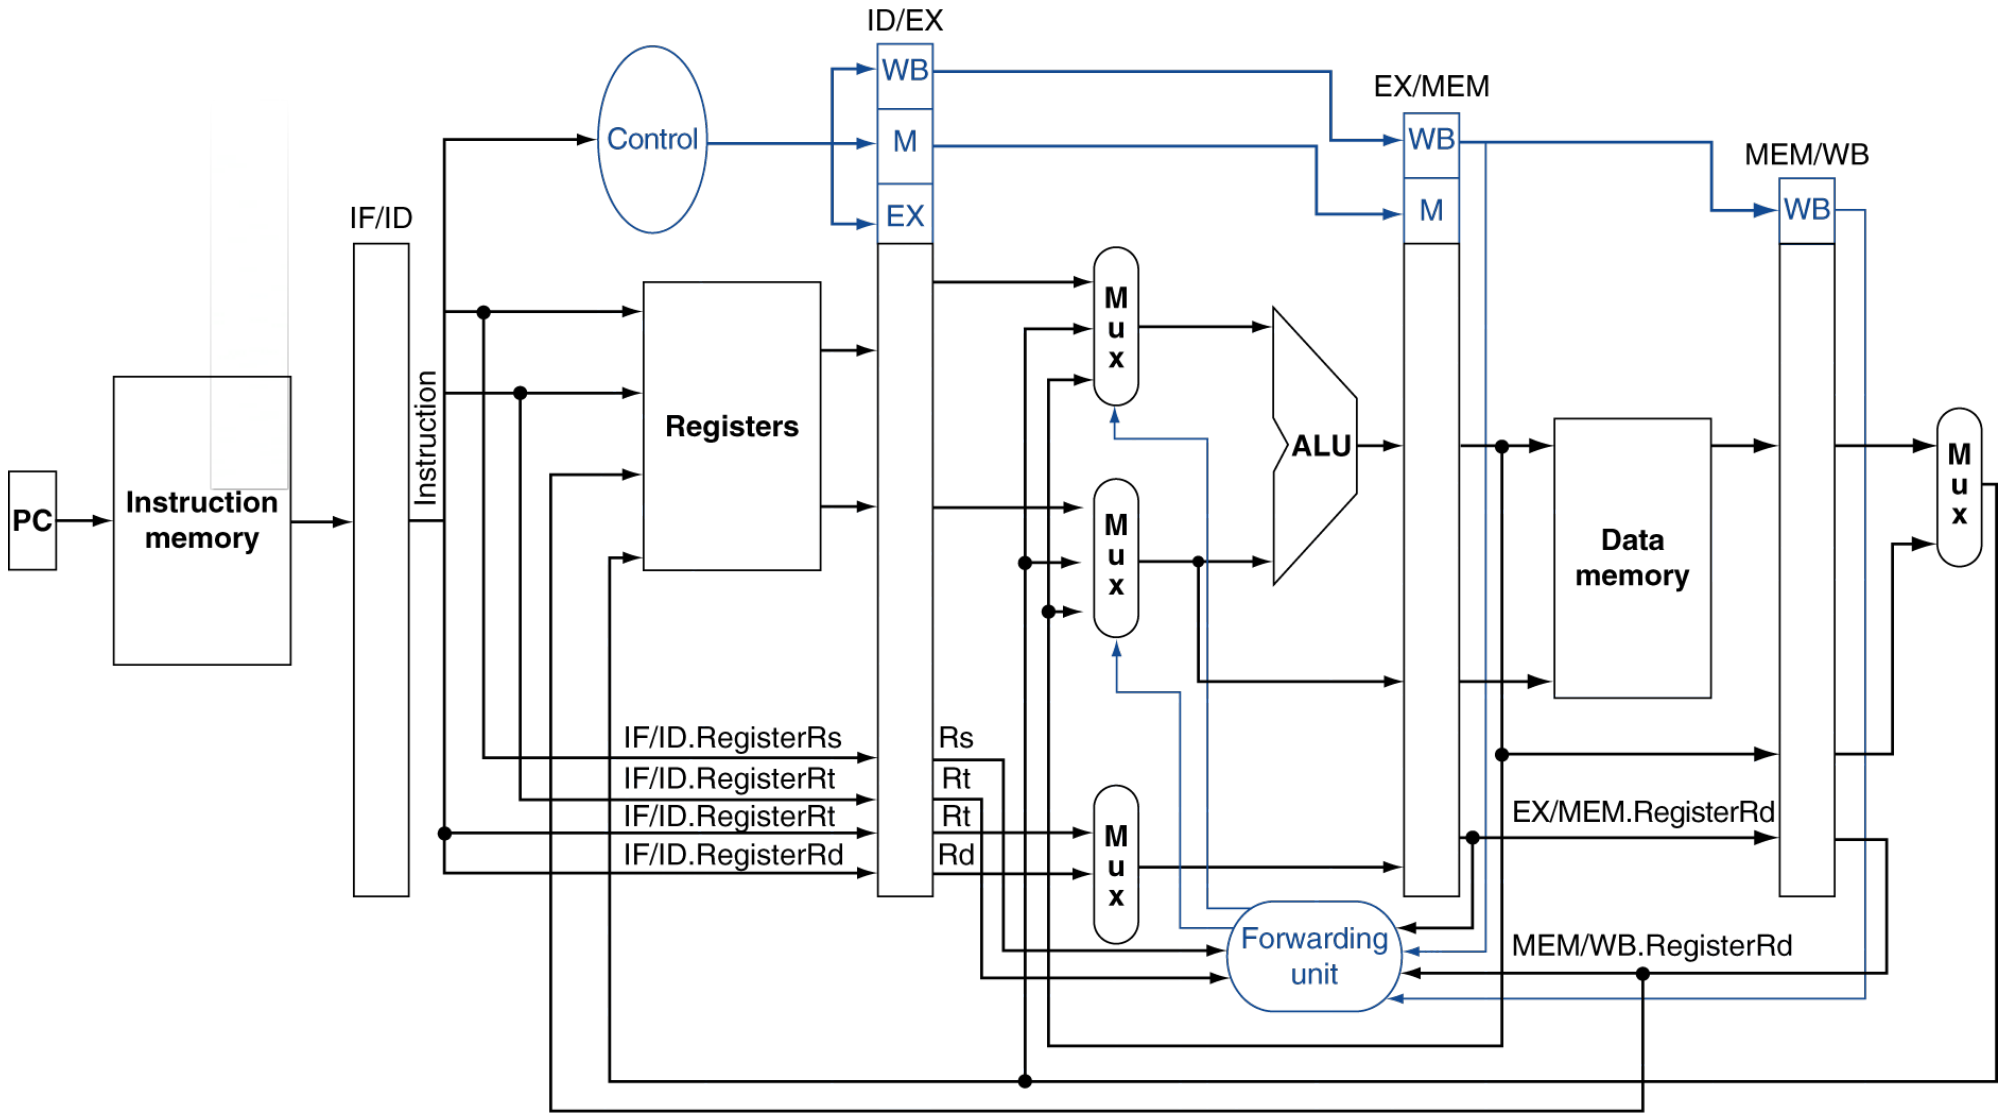

Data Hazard and Stalls

- Data forwarding does not work when
  - Instruction tries to read a register following a load instruction that writes the same register.
- Something must stall in the pipeline for a combination of load followed by an instruction that reads its result.
- Therefore, we need a hazard detection unit in the pipeline to implement a stall.

Load-Use Data Hazard

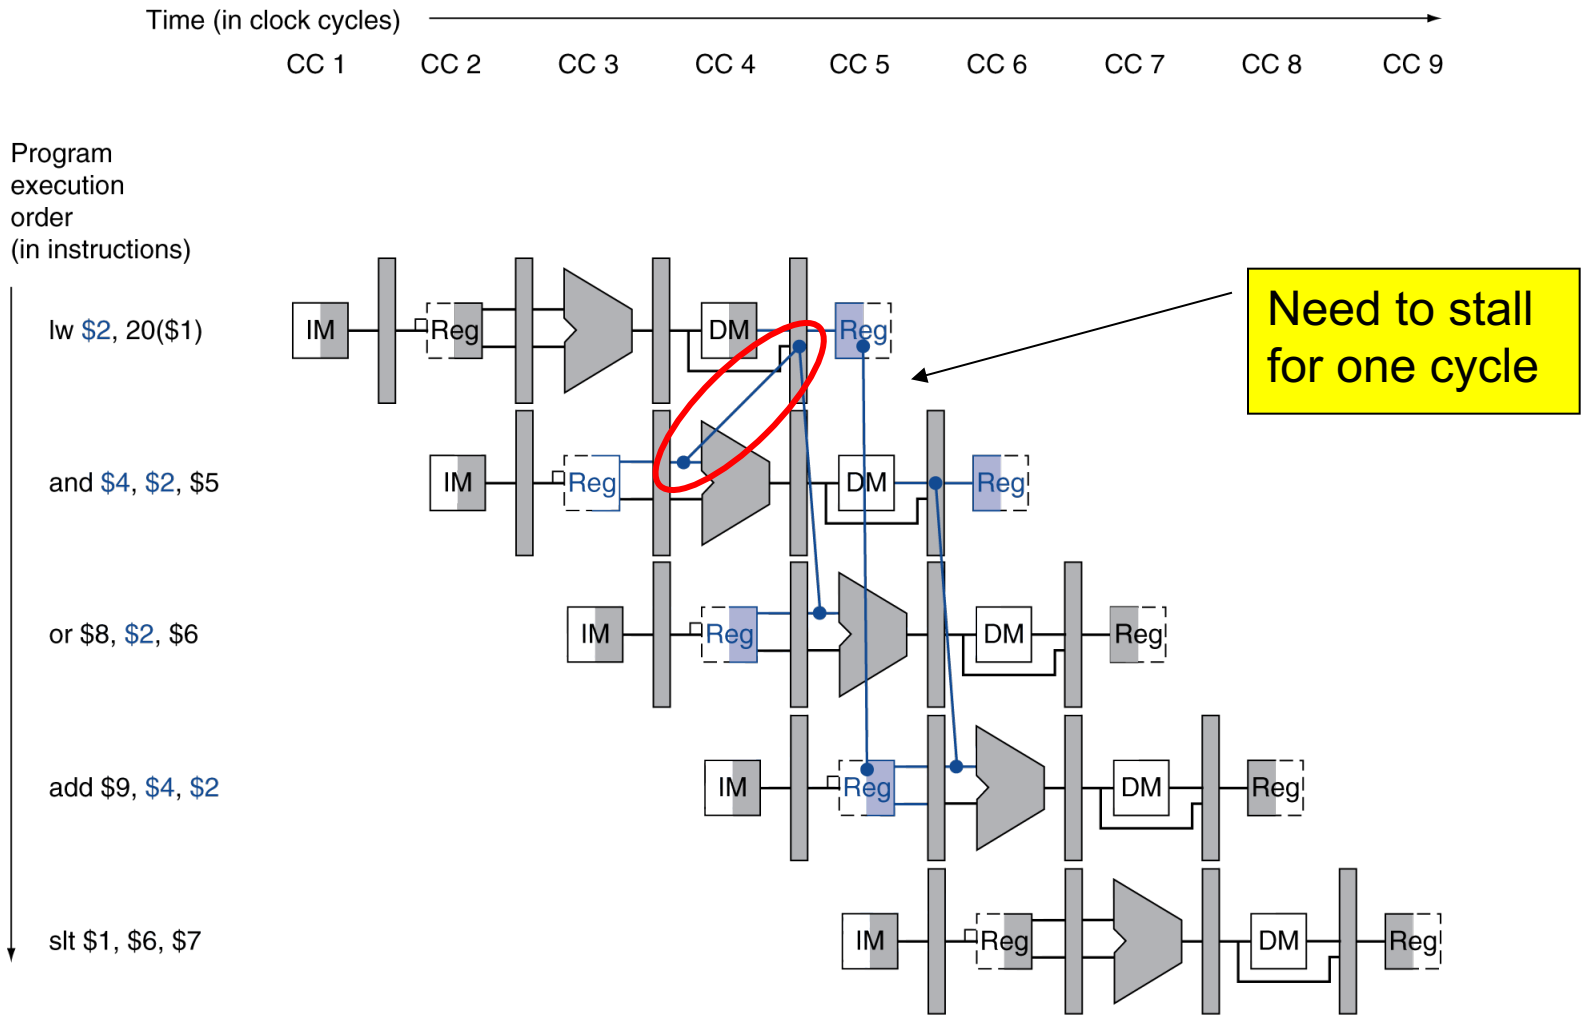

Load-Use Hazard Detection

- Check when using instruction is decoded in ID stage
- ALU operand register numbers in ID stage are given by
  - IF/ID.RegisterRs, IF/ID.RegisterRt
- Load-use hazard when
  - ID/EX.MemRead and
    ((ID/EX.RegisterRt = IF/ID.RegisterRs) or
    (ID/EX.RegisterRt = IF/ID.RegisterRt))
- If detected, stall and insert bubble

How to Stall the Pipeline

- Force control values in ID/EX register to 0
  - EX, MEM and WB do nop (no-operation)
- Prevent update of PC and IF/ID register
  - Using instruction is decoded again
  - Following instruction is fetched again
  - 1-cycle stall allows MEM to read data for lw
    - Can subsequently forward to EX stage

Stall/Bubble in the Pipeline

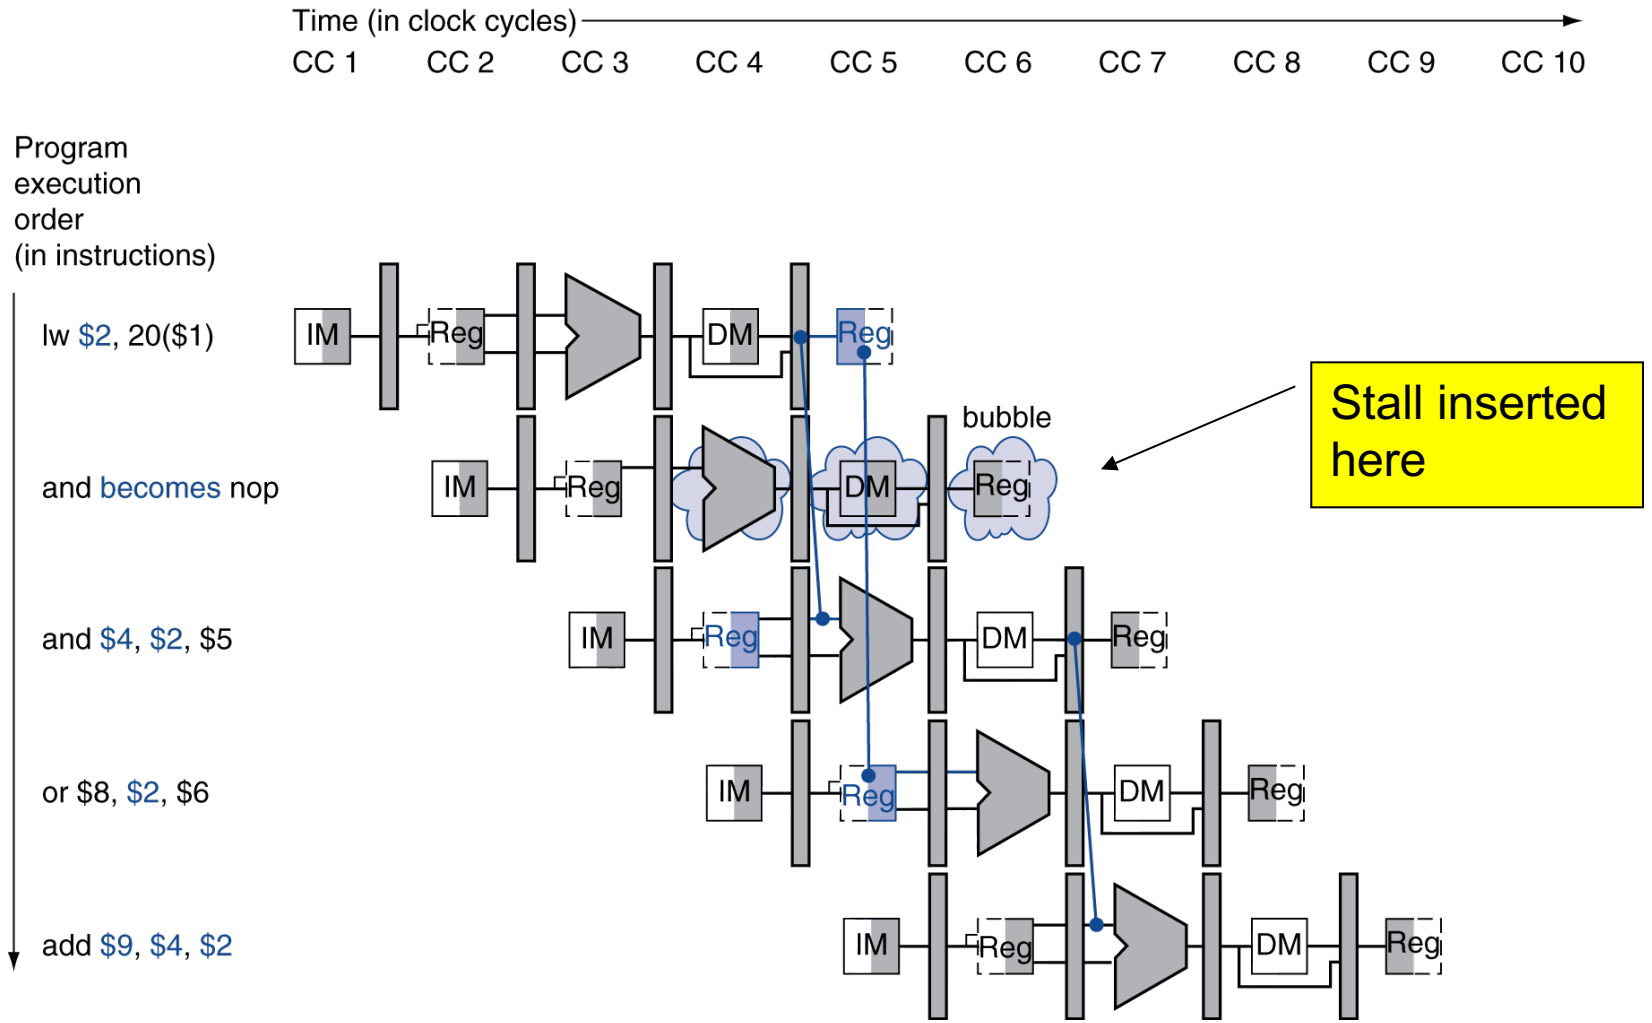

Stall/Bubble in the Pipeline

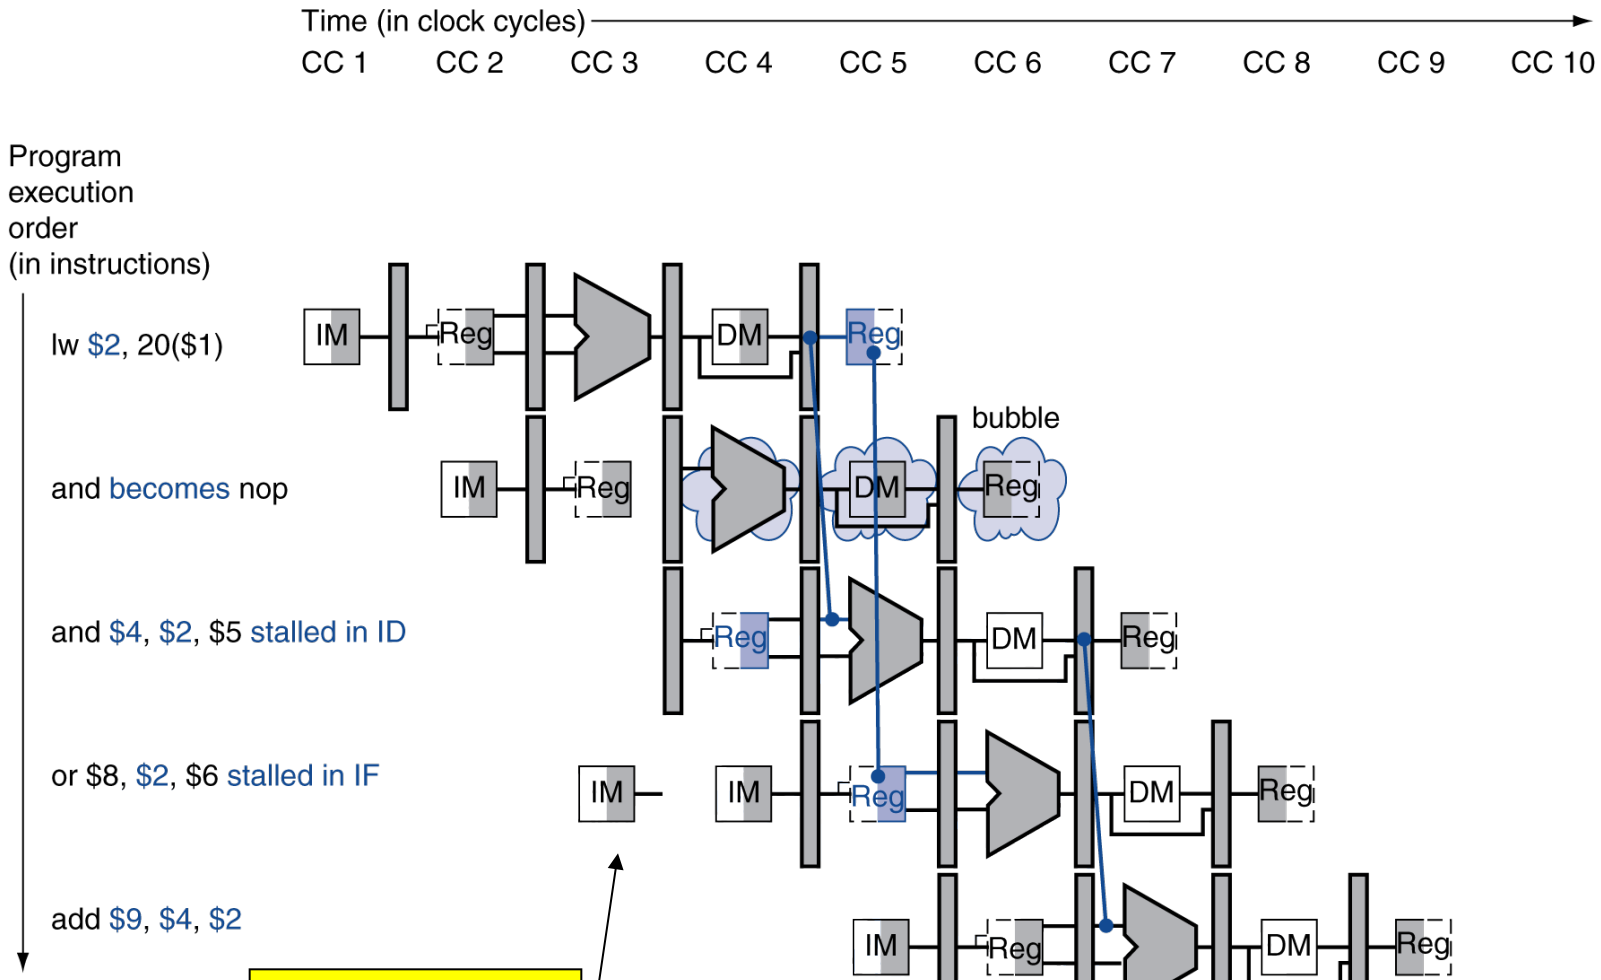

Datapath with Hazard Detection