

2026 Edition

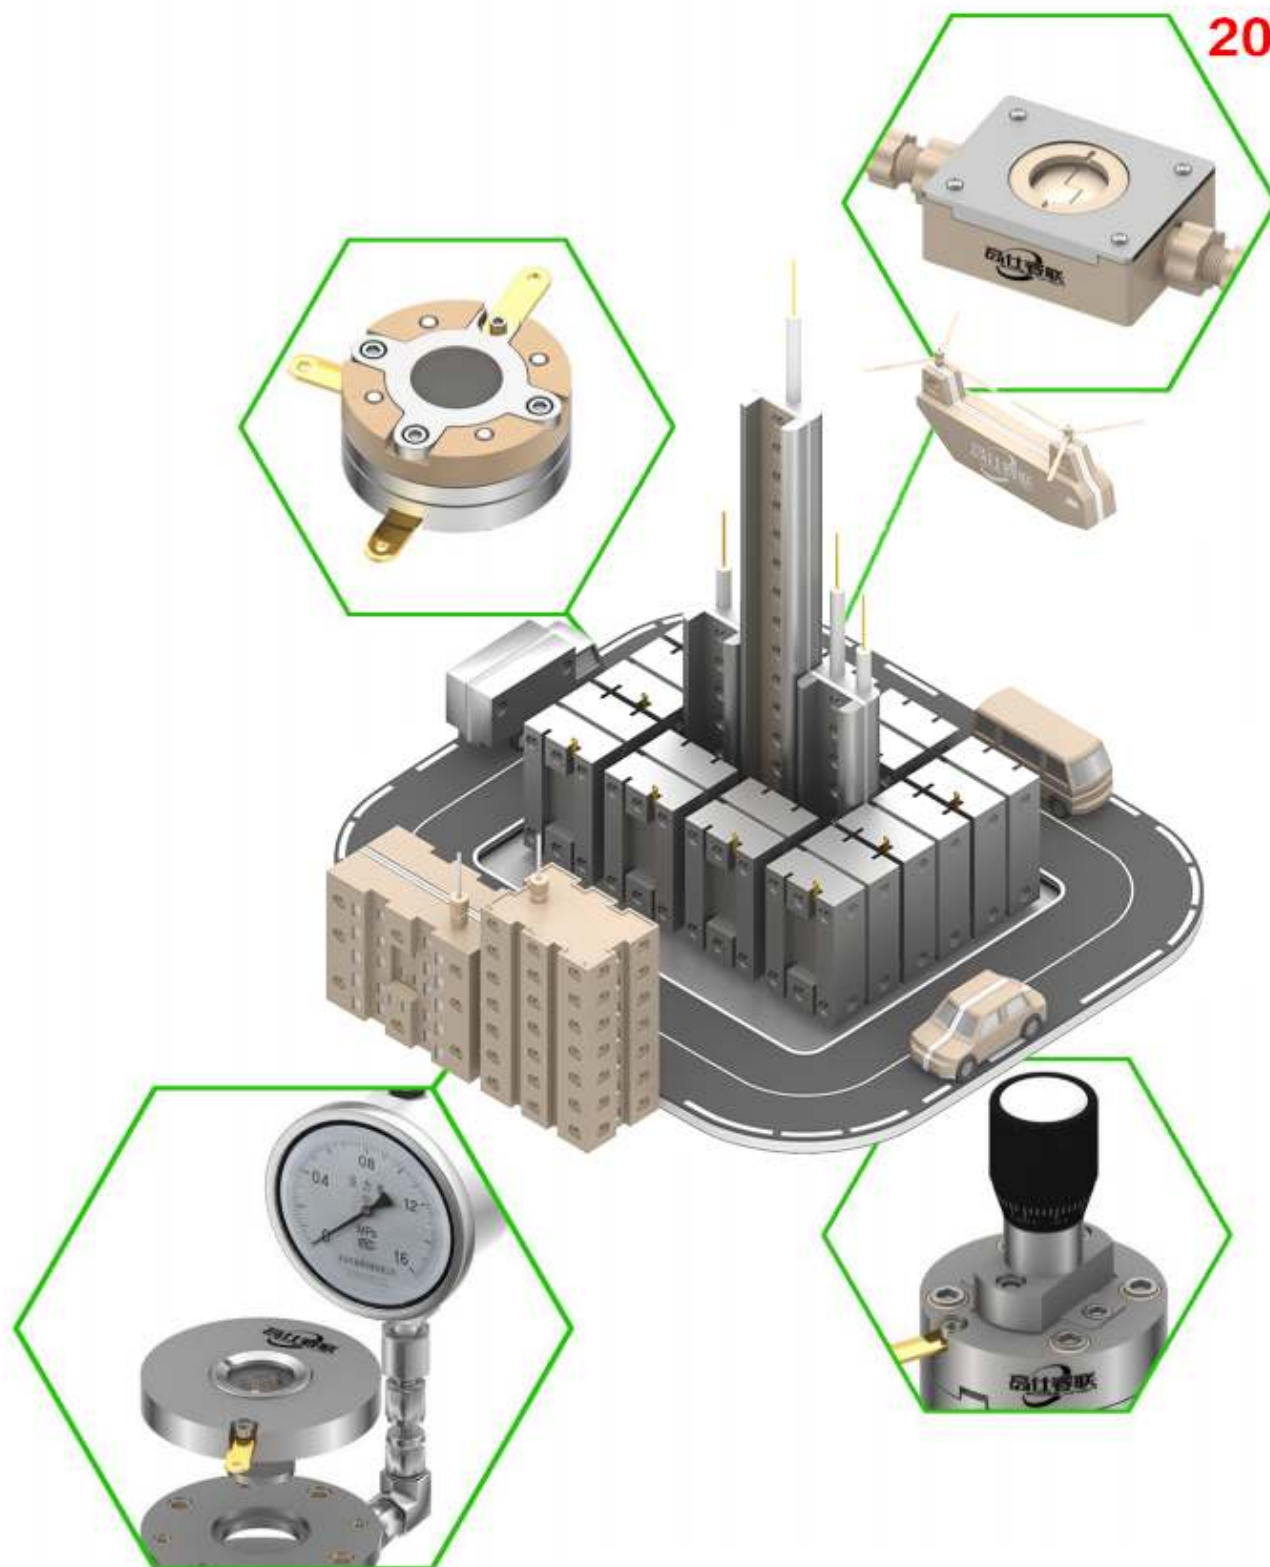


Table of Contents

I. Single-Chamber Glass Electrolytic Cell Series

Variable-Diameter Electrolytic Cell (Non-Sealed) Model: C001 	Page 04
Straight Five-Neck Electrolytic Cell Models: C002-1, C002-2 	Pages 05, 06
Conventional Five-Neck Electrolytic Cell Model: C004 	Page 07

II. Membrane-Replaceable Electrolytic Cell Series

2H-Type Membrane-Replaceable Electrolytic Cell Models: C007-1, C007-2 	Pages 08, 09
Small-Volume H-Type Membrane-Replaceable Electrolytic Cell Models: C007-10, C007-10-2 	Page 10
2H Electrochemical H-Type Flow Cell Model: C007-11 	Page 11
3H-Type Membrane-Replaceable Electrolytic Cell Models: C008-1, C008-2 	Pages 12, 13
Small-Volume 3H-Type Membrane-Replaceable Electrolytic Cell Model: C008-10 	Page 14

III. Corrosion Test Cell Series

Spherical Corrosion Test Cell Model: C009 	Page 15
Flat Corrosion Test Cell Model: C010 	Page 16
Coating Corrosion Test Cell Model: C011 	Page 17

IV. Quartz Electrochemical Cell Series

Square Quartz Electrochemical Cell Models: C012-1, C012-2 	Pages 18, 19
Thin-Layer Spectroelectrochemical Cell Models: C013-1, C013-2 	Pages 20, 21
Small Quartz Spectroelectrochemical Cell (Sealed Cuvette Type) Model: C013-3 	Page 22
Cylindrical Quartz Electrochemical Cell (Open Type) Model: C014 	Page 23
Cylindrical Quartz Electrochemical Cell Models: C015-1, C015-2 	Pages 24, 25
Cylindrical Quartz Electrochemical Cell (Chain Type) Models: C017-1, C017-2 	Pages 26, 27
Cylindrical Quartz Electrochemical Cell (Chain Type, Side Illumination) Models: C018-1, C018-2 	Pages 28, 29

V. Photoelectrocatalytic Electrochemical Cell Series

Single-Chamber Photoelectrochemical Cell (Side Illumination) Models: C019-1, C019-2 	Pages 30, 31
H-Type Membrane-Replaceable Photoelectrochemical Cell (Single Optical Window) Models: C023-1, C023-2 	Pages 32, 33
Small-Volume Membrane-Replaceable Photoelectrochemical Cell (Single Optical Window) Models: C023-10, C023-10-2 	Page 34
H-Type Membrane-Replaceable Photoelectrochemical Cell (Dual Optical Windows) Models: C024-1, C024-2 	Pages 35, 36
Small-Volume Membrane-Replaceable Photoelectrochemical Cell (Dual Optical Windows) Model: C024-10 	Page 37
3H-Type Membrane-Replaceable Photoelectrochemical Cell Models: C025-1, C025-2 	Pages 38, 39
Small-Volume 3H Membrane-Replaceable Photoelectrochemical Cell Model: C025-10 	Page 40

VI. Perfluorinated Photoelectrochemical Cell Series

Single-Chamber Perfluorinated Photoelectrochemical Cell

Models: C026-1, C026-2 Pages 41, 42

Single-Chamber Perfluorinated Photoelectrochemical Cell (Bracket Type)

Models: C026-3, C026-4 Pages 43, 44

Perfluorinated H-Type Membrane-Replaceable Photoelectrochemical Cell

Models: C027-1, C027-2 Pages 45, 46

Single-Chamber Photoelectrochemical Cell

Model: C028 Page 47

Perfluorinated H-Type Membrane-Replaceable Photoelectrochemical Cell

Models: C032-1, C032-2 Pages 48, 49

Small-Volume Side-Illuminated Electrochemical Cell (Bracket Type)

Models: K1300, K1300-25 Page 50

Perfluorinated Plate/Sheet Working Electrolytic Cell

Model: C030 Page 51

VII. Pure Photocatalytic Cell Series

Photocatalytic Cell

Models: C033-1, C033-2 Page 52

VIII. Electrolytic Cell Accessories & Price List Page 53

We also offer various custom electrochemical cells for special applications, such as micro-volume cells, electrosynthesis electrolytic cells, photocatalytic cells, etc. Please contact customer service for detailed information.

The electrodes, separators and other components shown in the electrochemical cell figures are for demonstration purposes only.

Electrodes and separators are not included in the quotation. They need to be purchased separately unless specified as standard accessories.

Committed to the R&D and manufacturing of electrochemical equipment.

Variable-Diameter Electrolytic Cell (Non-Sealed)

Single-Compartment Glass Electrolytic Cell Series

Model: C001

Cell body material: High borosilicate glass

This electrolytic cell is widely used for three-electrode systems. Standard volumes range from 30 mL to 500 mL, and customized volumes are available upon request.

The single chamber opening adopts a flanged design to enhance structural stability of the cell.

Equipped with variable-diameter electrode ports (6.5 mm, 8.5 mm, 10.5 mm, 12.5 mm inner diameter) to fit electrodes of different sizes conveniently.

Salt bridge fittings or gas bubbling ports can be added as required.

Inlet and outlet gas ports are optional to provide inert atmosphere protection for various experimental conditions.

Two versions are available: single-layer and double-layer. The double-layer model adds a thermostatic water bath function. Circulating constant-temperature water flows through the jacket layer to maintain a stable temperature for the test solution inside the cell.



Volume (mL)	Single-Layer Price	Double-Layer Price)
30ml	30	70
50ml	35	70
100ml	40	80
150ml	50	90
250ml	55	100
300ml	80	160
500ml	100	180
Custom specifications are available upon request. Prices are subject to adjustment, and the latest quotation shall prevail.		

Straight Five-Neck Electrolytic Cell

Single-Compartment Glass Electrolytic Cell Series

Model: C002-1

This cell adopts a relatively sealed structure, widely used for three-electrode systems. Standard volumes range from 30 mL to 500 mL, and customized capacities are available upon request.

The glass body forms a tight seal with the lid by compressing an O-ring via threaded lid; the electrode ports also achieve sealing by pressing O-rings with sealing screws.

Equipped with a fritted salt bridge.

Fitted with gas inlet and outlet ports, and the inlet is integrated with a bubbler to provide inert atmosphere protection for diverse experiments.

The double-layer version is equipped with a thermostatic water bath function. Circulating constant-temperature water maintains a stable temperature for the test solution inside the cell.

Lid material: PTFE (Polytetrafluoroethylene). Lid dimensions vary with cell volume; inner thread lid diameters are mainly 35 mm, 50 mm, 60 mm and 70 mm.



Volume (mL)	Caliber Size	Single-Layer Price	Double-Layer Price		Volume (mL)	Caliber Size	Single-Layer Price	Double-Layer Price
30ml	50#	140	210		200ml	60#	210	300
50ml	50#	140	210		250ml	70#	320	400
100ml	50#	150	220		500ml	70#	360	450
150ml	60#	200	260		1000ml	70#	400	500
This cell is also available in a fully sealed version equipped with valves, which supports nitrogen purging for deoxygenation and vacuum pumping; please refer to Model C002-2.								
All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest quotation shall prevail.								

Straight Five-Neck Electrolytic Cell

Single-Compartment Glass Electrolytic Cell Series

Model: C002-2

This cell adopts a fully hermetically sealed structure, commonly used for three-electrode systems. Standard volumes range from 10 mL to 500 mL, and customized volumes are available upon request.

The electrodes are inserted internally via audio jack ports on the lid to achieve complete sealing of the three-electrode system.

Electrodes must be specially matched to the cell body.


Fritted salt bridges or Luggin capillaries cannot be installed on this cell; only Ag/AgCl electrodes can be used.

Valves and gas bubbling fittings are equipped for atmosphere protection. The valve connected to the bubbler serves as the gas inlet.

As a fully sealed unit, vacuum pumping (below -100 kPa) or pressurization can be performed via the valves. For pressurization use, the cell bottom must be round-bottomed. For safety, the operating pressure shall not exceed 0.5 MPa.

Owing to manufacturing limitations, the inner glass wall of the double-layer cell is relatively thin, so pressurization is strictly prohibited for double-layer versions.

The double-layer cell is equipped with a thermostatic water bath function. Circulating constant-temperature water maintains a stable temperature for the test solution inside the cell.

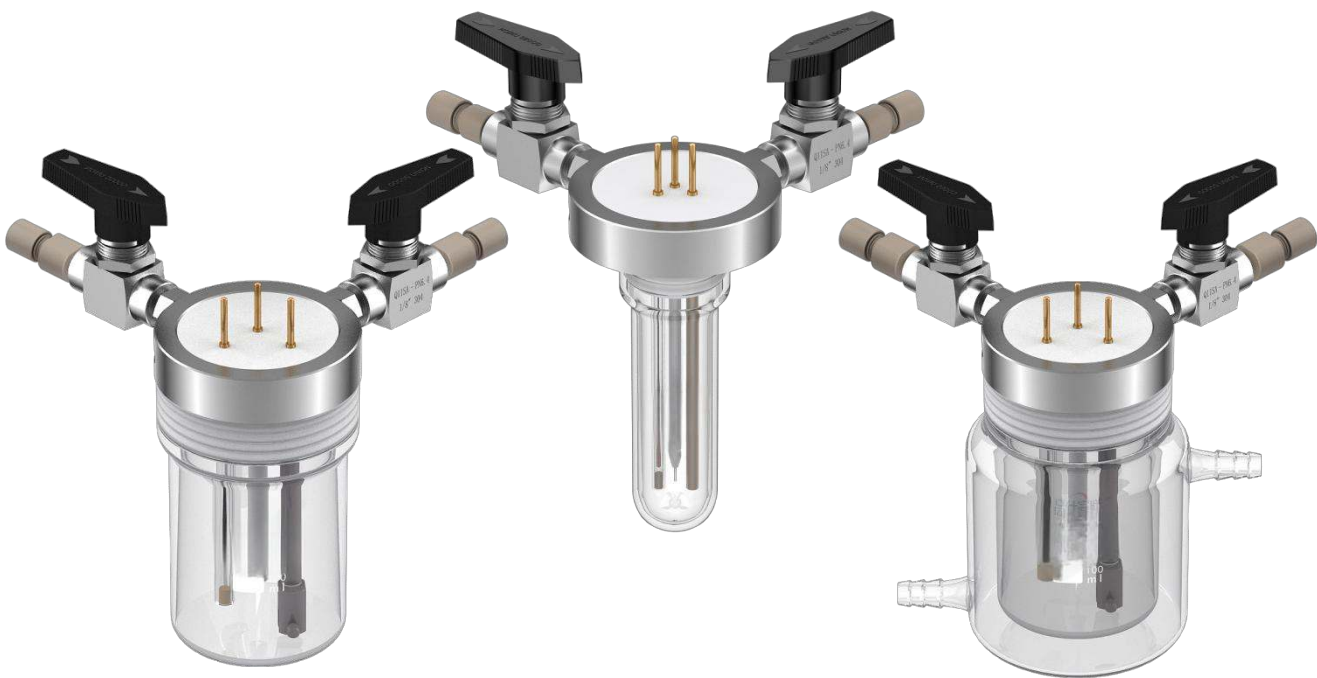

Volume (mL)	Caliber Size	Single-Layer Price	Double-Layer Price	Volume (mL)	Caliber Size	Single-Layer Price	Double-Layer Price
10mL	17#	140	230	200mL	60#	210	310
30mL	50#	140	230	250mL	70#	320	430
50mL	50#	140	230	500mL	70#	360	500
100mL	50#	150	250	1000mL	70#	500	660
150mL	60#	200	300				
All prices listed above exclude valve costs. An additional charge of €100 applies per valve. The fitted valves support nitrogen purging for deoxygenation and vacuum pumping operations.							
All listed dimensions are standard specifications; customized sizes are available upon request. Prices are subject to revision without prior notice, and the latest quotation shall prevail.							

Committed to the R&D and manufacturing of electrochemical equipment.

Conventional Five-Neck Electrolytic Cell

Single-Compartment Glass Electrolytic Cell Series

Model: C004

Cell body material: High borosilicate glass

Standard configuration: Cell body, F-type gas inlet tube, salt bridge, liquid seal, PTFE stoppers

Electrodes can be matched as required, and all applicable electrodes must be extended-length type.

Widely applied for three-electrode systems; customized fabrication is available upon request.

Taper-bottom cells are optional, with volumes ranging from 5 mL to 25 mL.

Sealing between the cell body and lid is achieved via ground joints paired with inverted conical lids.

The electrode ports are sealed by compressing O-rings with tightening screws.

Equipped with a salt bridge to bring the reference electrode closer to the working electrode, which effectively reduces ohmic resistance.

The F-type gas inlet allows gas purging both above and below the liquid level for atmosphere protection tailored to different experiments. Stop purging beneath the liquid surface once the experiment starts, and only maintain gas flow above the liquid level.

This is a relatively sealed system. When used with a rotating disk electrode, full sealing cannot be achieved. In this case, increase the gas flow above the liquid surface to sustain inert atmosphere protection.

Two versions are available: single-layer and double-layer. The double-layer variant is integrated with a thermostatic water bath function.

Circulating constant-temperature water flows through the jacket layer to maintain a stable temperature for the test solution inside the cell.



Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
5-20ml	680	880		150ml	800	1100
25ml	680	880		250ml	1000	1400
50ml	680	880		500ml	1200	1600
100ml	680	880		1000ml	1400	2000
The 5-20 mL specification refers to taper-bottom cells, whose effective volume can be adjusted by increasing or decreasing the amount of solution inside.						
All listed sizes are standard specifications; customized sizes are available upon request. Prices are subject to change, and the latest price shall prevail.						

2H-Type Membrane-Replaceable Electrolytic Cell (Relatively Sealed)

Membrane-Replaceable Cell Series

Model: C007-1

Cell body material: High borosilicate glass

Electrodes can be configured as required; all matched electrodes must be extended-length type.

The single-layer cell body features an overhead hollow layer design, which effectively eliminates solution stagnation/dead volume.

Commonly applied for three-electrode systems. Standard volumes range from 30 mL to 500 mL, and customized capacities are available upon request.

It is a relatively sealed two-compartment cell. The cathode and anode chambers are separated by an ion-exchange membrane (to be provided by the user). The two chambers are hermetically connected via clamps for convenient membrane replacement. The reference electrode and working electrode are placed in the same compartment to effectively reduce ohmic drop (IR drop).

The glass sealing section adopts an external threaded port design. The inner core is made of 360° rotatable PTFE, enabling precise alignment of electrodes with channels; sealing is completed by tightening the outer cap made of POM material.

Electrode sealing is realized on PTFE stoppers by compressing O-rings with sealing screws.

Equipped with a submerged gas bubbling device for atmosphere control tailored to various experiments: straight bubbler for carbon dioxide reduction, L-shaped bubbler for nitrogen reduction, etc.



Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
30ml	320	460		150ml	500	630
50ml	330	460		200ml	560	700
100ml	360	500		250ml	560	700
An extra charge of 34 will be added to the base price for adding a sampling port.						
A fully hermetically sealed version equipped with valves is also available, which supports nitrogen purging for deoxygenation and vacuum pumping; please refer to Model C007-2.						
All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest quotation shall prevail.						

Committed to the R&D and manufacturing of electrochemical equipment.

2H-Type Membrane-Replaceable Electrolytic Cell (Hermetically Sealed) **Membrane-Replaceable Cell Series**
Model: C007-2

Cell body material: High borosilicate glass

Valves and gas bubbling fittings are installed to realize inert atmosphere protection.

This fully sealed system allows vacuum pumping (pressure below -100 kPa) via valves; mild pressurization is permissible. For safety purposes, the operating pressure shall never exceed 0.5 MPa.

Electrodes must be custom-fabricated to match the cell perfectly.

Electrodes are inserted and removed internally via audio jack ports on the lid to achieve complete hermetic sealing of the electrode system.

The single-layer cell adopts an overhead hollow structure, which effectively eliminates solution dead volume.

As a fully sealed two-compartment electrolytic cell, the anode and cathode chambers are separated by an ion-exchange membrane. The two compartments are tightly clamped together for easy membrane replacement. The reference electrode and working electrode are placed in the same chamber to effectively reduce ohmic (IR) drop.

The glass sealing section features an external threaded port. Its inner core is made of 360° rotatable PTFE to align electrodes precisely with channels, and sealing is accomplished by tightening the outer cap made of POM material.

A submerged gas bubbling assembly is provided for atmosphere regulation tailored to diverse experiments: straight bubbler for CO reduction, L-shaped bubbler for nitrogen reduction, etc.

The double-jacket version is equipped with a thermostatic water bath system. Circulating constant-temperature water flows through the jacket layer to maintain a stable temperature for the test solution inside the cell.



Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
30ml	400	530		150ml	560	700
50ml	400	530		200ml	630	760
100ml	430	560		250ml	630	760
An additional fee of 34 will be charged on the base price for adding a sampling port.						
All listed prices exclude valve costs. A surcharge of 100 per valve applies if valves are required; fitted valves support nitrogen purging for deoxygenation and vacuum pumping operations.						
All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to revision, and the latest quotation shall prevail.						

Committed to the R&D and manufacturing of electrochemical equipment.

Small-Volume H-Type Membrane-Replaceable Electrolytic Cell (Relatively Sealed) Model: C007-10

Membrane-Replaceable Cell Series

Cell body material: High borosilicate glass

Electrodes can be configured on demand, and all matched electrodes must be extended type.

The single-layer cell body adopts an overhead hollow-layer design, which effectively eliminates solution dead volume.

Widely applied to three-electrode systems; the volume of each single compartment is 10 mL.

It is available in two structural types: relatively sealed and hermetically sealed. The cathode chamber and anode chamber are separated by an ion-exchange membrane. The two chambers are hermetically clamped together for convenient membrane replacement. The reference electrode and working electrode are placed in the same compartment to effectively reduce ohmic (IR) drop.

The glass sealing section features an internal threaded port. Sealing is achieved by tightening the PTFE fitting to compress the sealing ring.

The electrode ports are sealed by compressing O-rings with tightening screws.

Single-layer version Price: 330

Single-layer version with sampling port Price: 360

Temperature-controllable double-jacket cell version Price: 600



Small-Volume Membrane-Replaceable Electrolytic Cell (Hermetically Sealed) Model: C007-10-2

Cell body material: High borosilicate glass

The working electrode, counter electrode and reference electrode need to be custom-matched for this cell.

The single-layer cell body adopts an overhead hollow layer design, which effectively eliminates solution dead volume.

It is widely used for three-electrode systems, with a volume of 10 mL per single compartment.

This is a fully hermetically sealed system. The cathode and anode chambers are separated by an ion-exchange membrane. The two chambers are tightly clamped together for convenient membrane replacement. Placing the reference electrode and working electrode in the same compartment effectively reduces ohmic (IR) drop.

Complete hermetic sealing of electrodes is achieved via audio jack ports on the PTFE lid, which allow internal insertion and removal of electrodes while maintaining full sealing of the electrode assembly.

Equipped with a submerged gas bubbling device to provide tailored inert atmosphere protection for various experiments.

A sampling port can be added to the cell body upon request.

Valves can be fitted optionally. All hermetic sealing connections adopt quick couplings, with 3 mm diameter PTFE tubing used for the quick connection fittings.

Single-layer cell body: 330


Single-layer cell body with sampling port: 360

Temperature-controllable double-layer cell body: 600

Valve assembly: 800

The above prices apply to gas inlet & outlet ports equipped with red cap hose barbs.

If replaced with PEEK quick-disconnect fittings, an additional charge of 50 shall be applied for each quick connector.

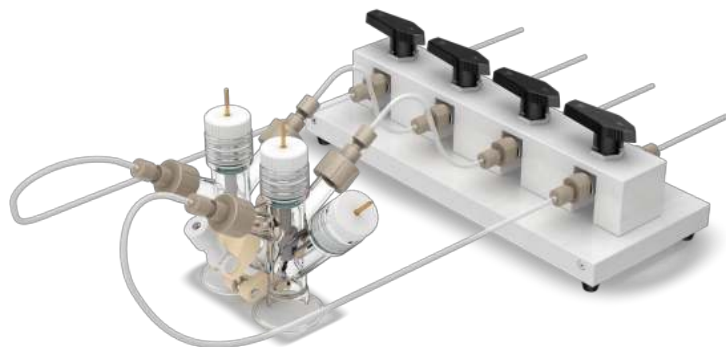

2H Electrochemical Cell / H-Type Flow Cell

Membrane-Replaceable Cell Series

Model: C007-11

Electrode spacing: < 14 mm. The cell voltage is less than 10 V at a current of 2 A. The distance between the reference electrode (with built-in salt bridge) and the working electrode is infinitely close to zero.

Inlet and outlet ports for catholyte are added to enable continuous flow of cathodic electrolyte. When flow operation is not required, the liquid ports can be sealed with spare screw plugs.

The salt bridge adopts an L-shaped external insertion design, penetrating horizontally from the side wall to facilitate adjustment of the gap between the salt bridge and working electrode.

A fixing fixture is fitted on the salt bridge to prevent lateral shaking, while still allowing free movement for distance adjustment between the salt bridge and working electrode.

Quick-release structure is adopted between the cell body and lid for easy detachment and installation of the lid.

Compression sealing with fluororubber delivers excellent tightness and prevents liquid leakage.

Gas inlet and outlet channels are arranged on the lid of the cathode compartment. The gas inlet is of submerged type, with tubing extending directly into the cell interior to facilitate gas diffusion into the solution. The gas outlet is equipped with quick-disconnect fittings for enhanced sealing performance.

The working electrode port is designed to accommodate rod electrodes with a diameter of 6 mm.

The cathode lid is provided with an anode exhaust port adjustable in real time according to experimental requirements.

The anode is a platinum mesh electrode perpendicular to the electrode shaft, fabricated from 99.99% pure platinum. Solid precious metal construction delivers far superior performance compared with gold-plated alternatives.


A two-stage variable-diameter sealing design is applied at the sealing junction between the anode and cell body, balancing reliable sealing and convenient electrode assembly.

Cell price: 560

Matching Ag/AgCl electrode: 340

Platinum mesh electrode: 320

Magnetic stirrer: 200

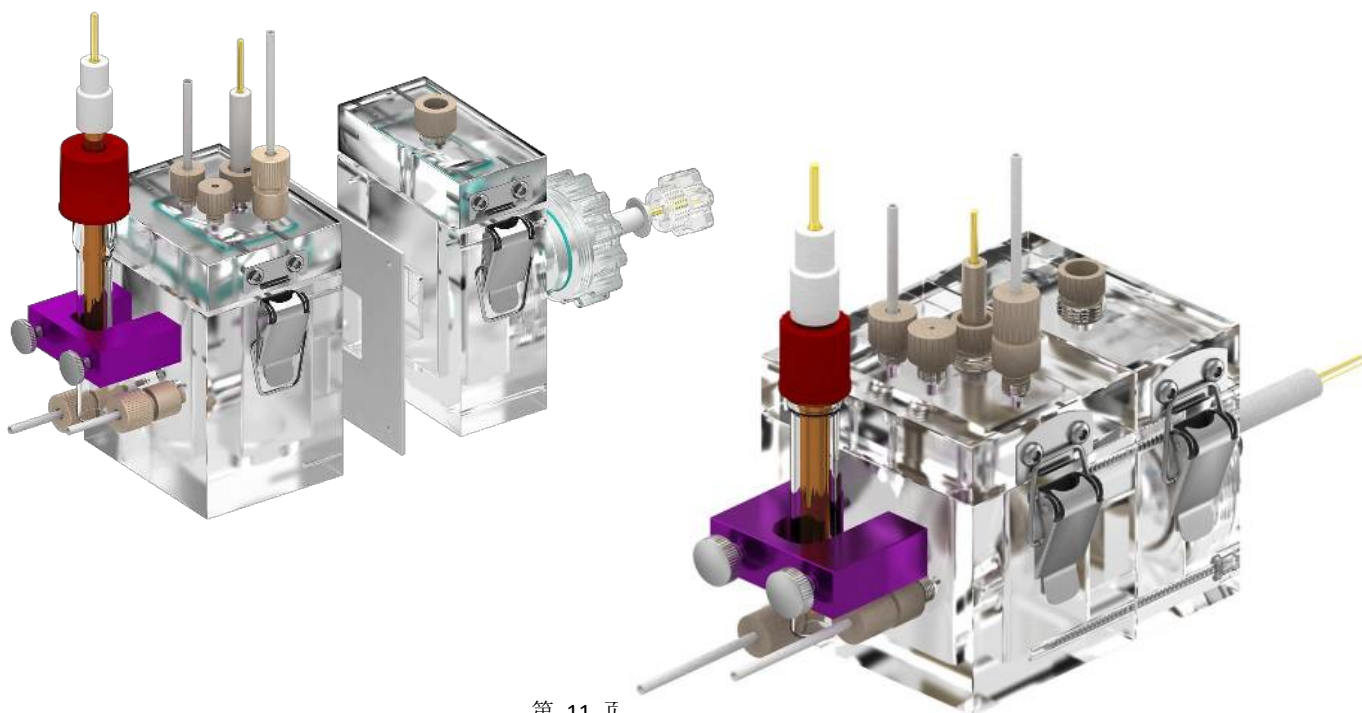

3H-Type Membrane-Replaceable Electrolytic Cell (Relatively Sealed)

Model: C008-1

Cell body material: High borosilicate glass

The reference electrode and working electrode are placed in separate compartments connected via a Luggin capillary, which effectively reduces ohmic (IR) drop.

The tip of the Luggin capillary extending into the working electrode compartment has an aperture diameter less than 0.2 mm.

Agar can be filled inside the Luggin capillary to slow down the flow rate of electrolyte solution.

The reference electrode compartment adopts an internal threaded sealing structure. Tight sealing must be ensured during operation to prevent liquid leakage between the reference compartment and working compartment caused by the communicating vessel effect.

Electrodes can be customized as required, and all matched electrodes must be extended-length type.

The single-layer cell body features an overhead hollow layer design to thoroughly eliminate solution dead volume.

It is a relatively sealed two-compartment system. The cathode and anode chambers are separated by an ion-exchange membrane and tightly clamped together for convenient membrane replacement.

The inner core is made of 360° rotatable PTFE, enabling precise alignment of electrodes with channels (electrodes are generally arranged parallel to the membrane).

A submerged gas bubbling assembly is equipped; bubblers of different shapes can be selected to provide tailored inert atmosphere protection for various experimental conditions.



Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
5-10ml	360	630		150ml	530	900
30ml	360	530		200ml	600	760
50ml	360	530		250ml	600	760
100ml	400	560				
An extra charge of 34 will be added to the base price for adding a sampling port.						
A fully hermetically sealed version equipped with valves is also available, which supports nitrogen purging for deoxygenation and vacuum pumping operations; please refer to Model C008-2.						
All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest quotation shall prevail.						

Membrane-Replaceable Cell Series

3H-Type Membrane-Replaceable Electrolytic Cell (Hermetically Sealed)

Model: C008-2

Cell body material: High borosilicate glass

Valves and gas bubbling fittings are equipped to realize inert atmosphere shielding.

As a fully hermetically sealed system, vacuum pumping (pressure below -100 kPa) can be performed via valves; mild pressurization is permissible.

For safety considerations, the maximum operating pressure shall not exceed 0.5 MPa.

Electrodes must be custom-manufactured to match this cell perfectly.

The reference electrode and working electrode are housed in separate compartments connected by a Luggin capillary, which effectively reduces ohmic (IR) drop.

The aperture diameter at the tip of the Luggin capillary protruding into the working electrode compartment is no larger than 0.2 mm.

Agar can be filled inside the Luggin capillary to slow the flow velocity of electrolyte solution.

The reference electrode compartment adopts an internal threaded sealing structure. Complete sealing must be ensured during operation to prevent liquid permeation between the reference compartment and working compartment caused by the communicating vessel effect.

Widely applied in three-electrode systems; customized fabrication is available on demand.

This is a fully sealed dual-chamber electrolytic cell. The cathode chamber and anode chamber are separated by an ion-exchange membrane. The two compartments are tightly clamped together for convenient membrane replacement.

The inner core is constructed from 360° rotatable PTFE, enabling precise alignment of electrodes with flow channels (electrodes are generally arranged parallel to the membrane).



Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
5-10ml	430	700		150ml	600	760
30ml	430	600		200ml	660	830
50ml	430	600		250ml	660	830
100ml	460	630				
An additional fee of 34 shall be charged on the base price for adding a sampling port.						
All prices listed above exclude valve charges. An extra 100 is required per valve if fitted; valves enable nitrogen purging for deoxygenation and vacuum pumping operations.						
All listed sizes are standard specifications, and customized sizes are available upon request. Prices are subject to change without prior notice, and the latest quotation shall prevail.						

本公司自主研发的膜可更换式电解池，具有结构简单、操作方便、维护容易、使用寿命长等特点，广泛应用于电化学研究、工业生产和环境监测等领域。

Membrane-Replaceable Cell Series

膜可更换式电解池是一种用于电化学研究的设备，其结构主要由电解池主体、电极、隔膜和密封件组成。该设备具有结构简单、操作方便、维护容易、使用寿命长等特点。在使用过程中，可以根据需要更换隔膜，以适应不同的实验条件。该设备广泛应用于电化学研究、工业生产和环境监测等领域。

- 膜可更换式电解池（327）
- 膜可更换式电解池（360）
- 膜可更换式电解池（594）



□ □ □ □ □ □ □ □ □

[illegible]

QUESTION

[illegible]

00000000 000000000000000000000000 000 000000000000000000 00000000 0000000000000000 00 0000000000000000 0000000000000000 00
 0000000000000000

☐ ☒ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☒ ☒ ☐ ☐ ☒ ☐ ☐ ☐ ☐ ☐ ☐ ☒ ☒ ☒ ☐ ☐ ☐ ☐ ☒ ☐ ☐

1. 2019 年 12 月 31 日，公司总资产为 1,000,000,000.00 元，净资产为 500,000,000.00 元，营业收入为 1,200,000,000.00 元，净利润为 100,000,000.00 元。

00000000 0 000 000000 000 0000000000 000000 0000 0000 000 00000000 000 000000 00 000000 000 0000000 00000000 00000000

000000 0000000000 0000 00000 00000000 000 00000 0000 000000000 000 000000 0000 00 0000000 00000 000000000

[illegible][illegible]


Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
500ml	960	110		1000ml	110	1260
本表所列各款产品价格仅供参考，实际价格以本公司最新公布的价格为准。如有变动，恕不另行通知。						

Committed to the R&D and manufacturing of electrochemical equipment.

Corrosion Test Electrolytic Cell Series

Corrosion Test Electrolytic Cell Series

Corrosion Test Electrolytic Cell Series

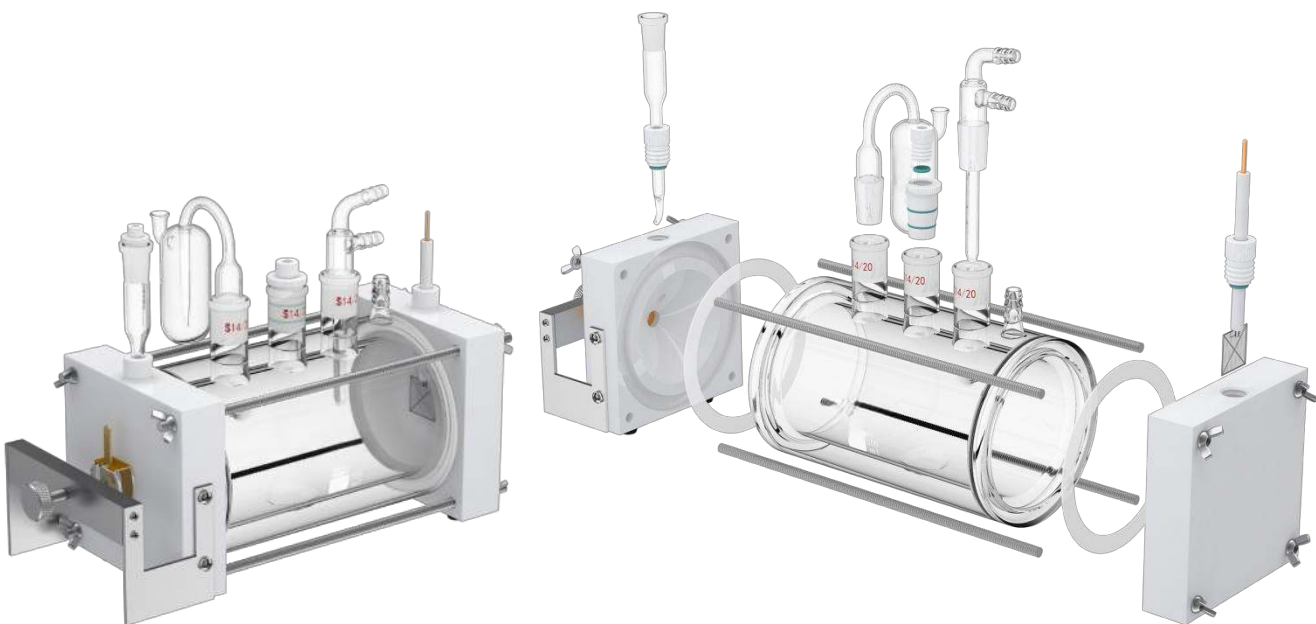

Volume (mL)	Single-Layer Price	Double-Layer Price	Volume (mL)	Price
250ml	1000	1300	Full PTFE Cell - 500 mL	1500
500ml	1200	1500	Thermometer	70
1000ml	1400	1600		

Corrosion Test Electrolytic Cell Series

Corrosion Test Electrolytic Cell Series

The electrochemical test cell is a device used to study the corrosion behavior of materials in an electrolyte solution. It consists of a working electrode, a reference electrode, and a counter electrode, all immersed in the electrolyte. The cell is designed to be easy to use and maintain, with a clear view of the electrodes and the electrolyte. The cell is made of high-quality materials and is designed to be durable and reliable. The cell is available in various sizes and configurations to meet different testing requirements. The cell is a essential tool for corrosion testing and research.




Volume (mL)	Single-Layer Price	Double-Layer Price		Volume (mL)	Single-Layer Price	Double-Layer Price
30ml	200	270		150ml	300	400
50ml	270	340		200ml	370	470
100ml	270	340		250ml	400	500
All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to adjustment, and the latest quotation shall prevail.						

Committed to the R&D and manufacturing of electrochemical equipment.

Quartz Electrochemical Cell Series

石英电化学池系列
石英电化学池系列

石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列
石英电化学池系列

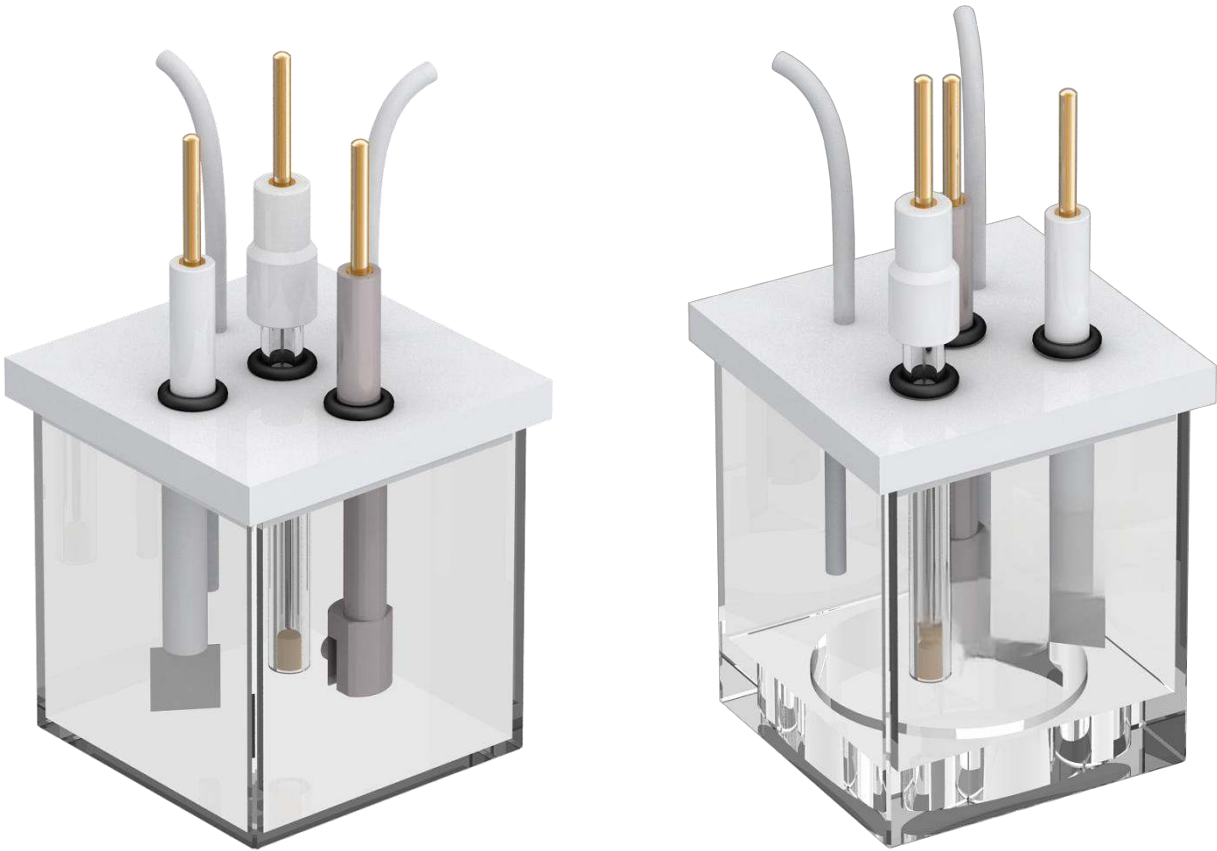


Item No.	Length × Width × Height (mm)	Price	Item No.	Length × Width × Height (mm)	Price
1	30*30*40	370	4	60*60*60	700
2	40*50*60	440	5	50*50*60 自带一体搅拌	870
3	50*50*50	500			
所有尺寸均为标准规格，可根据客户要求定制。价格仅供参考，最终以实际报价为准。					
All listed dimensions are standard specifications, customized sizes can be provided according to requirements. Prices are subject to adjustment, and the latest quotation shall prevail.					

本系列电化学池采用石英材质，具有优异的耐腐蚀性能，适用于各种腐蚀性介质的电化学反应。

本系列电化学池具有以下特点：

- 1. 采用高纯度石英材质，耐腐蚀性强，使用寿命长。
- 2. 结构紧凑，操作简便，易于清洗和维护。
- 3. 具有良好的密封性能，防止反应液泄漏。
- 4. 适用于各种电化学反应，如电解、电沉积、电合成等。
- 5. 可根据客户需求进行定制，满足不同实验要求。

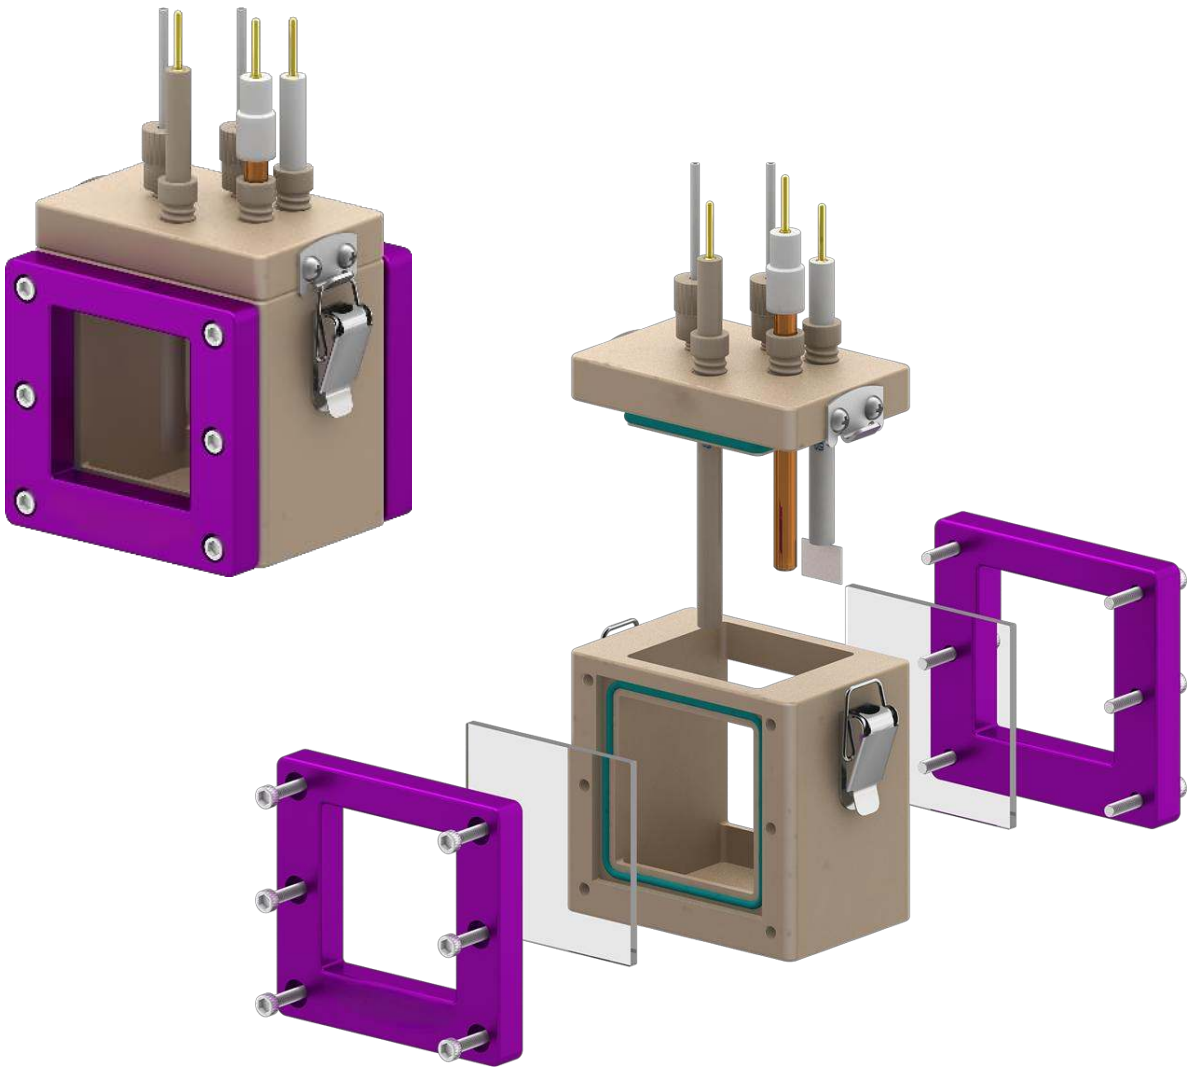

Item No.	Length × Width × Height (mm)	Price	Item No.	Length × Width × Height (mm)	Price
1	30*30*40	570	3	50*50*50	700
2	40*50*60	640	4	60*60*60	900

All listed dimensions are standard sizes, customized processing is available upon demand. Prices are subject to revision, and the latest quotation shall prevail.

Committed to the R&D and manufacturing of electrochemical equipment.

石英电化学池系列

Quartz Electrochemical Cell Series

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。


本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

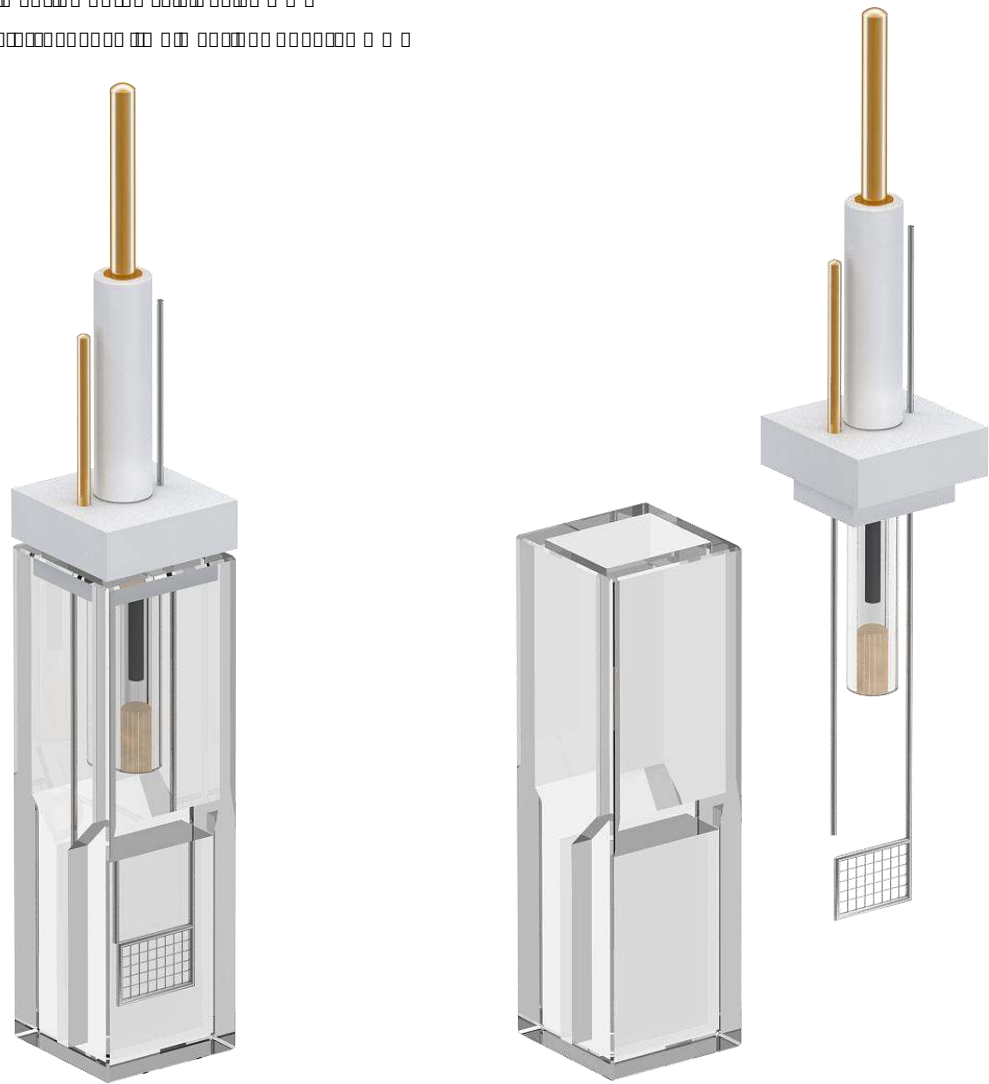

Chamber Dimension	Open-Type Price	Remarks
Cap: 8× 6.5× 1 mm	750	
Sealed version of this electrochemical cell is available, please refer to Model C013-2.		
Prices are subject to adjustment, and the latest quotation shall prevail.		

Thin-Layer Spectroelectrochemical Cell (Sealed Type)
Model : C013-2

该系列石英薄层光谱电化学池（密封型）采用石英材质，具有优异的耐腐蚀性和透光性，适用于各种电化学和光谱分析。该池结构紧凑，操作简便，是实验室研究的理想选择。该池由石英主体、密封盖、电极和隔膜组成。石英主体具有精确的几何形状，以确保电极间距和反应体积的准确性。密封盖采用特殊材料，能够有效防止泄漏。电极由惰性材料制成，具有良好的导电性和稳定性。隔膜则用于分隔反应室，防止短路。该池适用于各种电化学实验，如循环伏安法、恒电位电解等，同时也可用于紫外-可见光谱、红外光谱等分析。其密封设计确保了实验的安全性和结果的可靠性。该池体积小，便于携带和存储，是实验室必备的精密仪器之一。



Volume (mL)	Sealed Type Price	Remarks
Gap dimension: 8× 6.5× 1 mm	1600	
Prices are subject to change without prior notice; the latest quotation shall prevail.		

Committed to the R&D and manufacturing of electrochemical equipment.

石英电化学池系列 Quartz Electrochemical Cell Series

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。


本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材质，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电分析等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

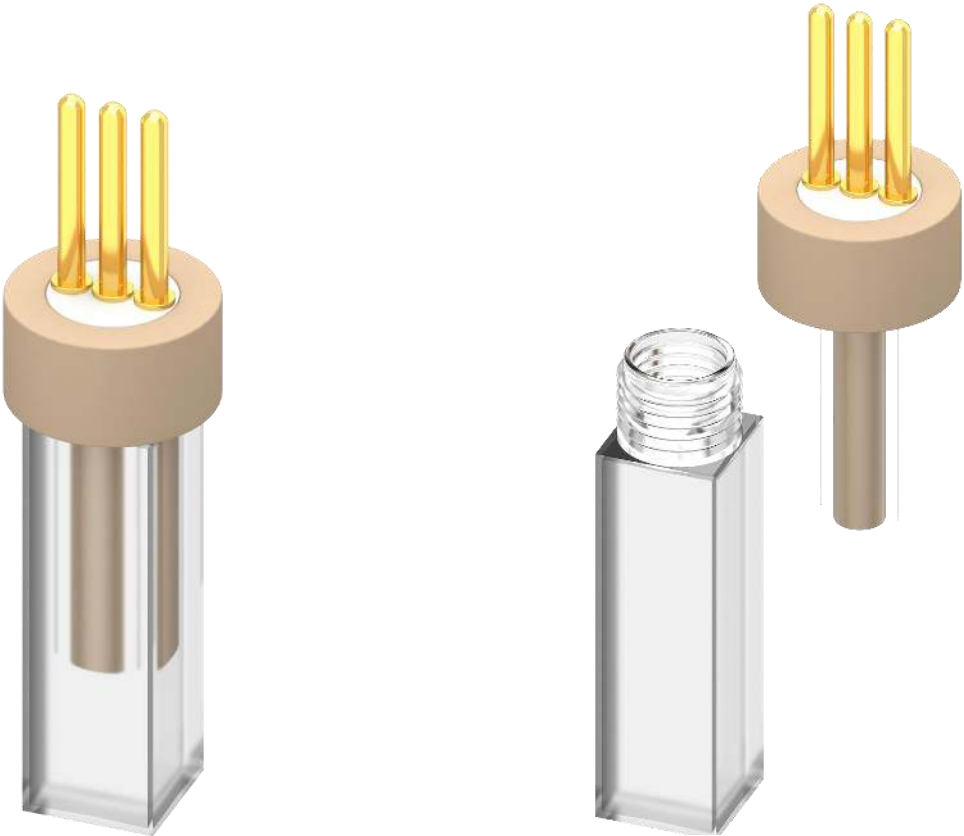

Volume (mL)	Sealed-Type Price	Remarks
12*12mm	1500	
Prices are subject to change without prior notice; the latest quotation shall prevail.		

Quartz Electrochemical Cell Series

石英电化学池系列
石英电化学池

本系列石英电化学池采用优质石英材料制成，具有耐腐蚀、耐高温、高纯度等优点。适用于各种电化学实验，如电催化、电合成、电沉积等。本系列电化学池结构紧凑，操作简便，是实验室研究的理想选择。

本系列电化学池采用石英材料制成，具有优异的耐腐蚀性能，能够耐受各种强酸、强碱及有机溶剂的腐蚀。同时，石英材料具有极高的热稳定性，可在高温条件下长期使用。此外，石英材料的纯度极高，能够有效避免杂质对实验结果的干扰。

本系列电化学池设计紧凑，占地面积小，便于实验室存放。其操作界面友好，易于上手，能够满足不同规模实验的需求。无论是基础研究还是工业应用，本系列电化学池都是您的理想选择。


本系列电化学池广泛应用于电催化、电合成、电沉积等领域。在电催化领域，可用于研究新型催化剂的活性及稳定性；在电合成领域，可用于合成高附加值化学品；在电沉积领域，可用于研究金属涂层的沉积机理及性能。

本系列电化学池具有多种规格，以满足不同实验需求。用户可根据实验条件及预算选择合适的型号。我们承诺提供优质的售后服务，确保您的实验顺利进行。

本系列电化学池采用先进的制造工艺，确保产品质量稳定可靠。我们拥有完善的质量管理体系，从原材料采购到成品出厂，均严格把控质量关。我们致力于为客户提供最优质的产品和服务。

本系列电化学池具有优异的性能及合理的价格，是您实验室研究的得力助手。我们诚邀广大客户垂询订购，我们将竭诚为您服务。

统一专业词汇

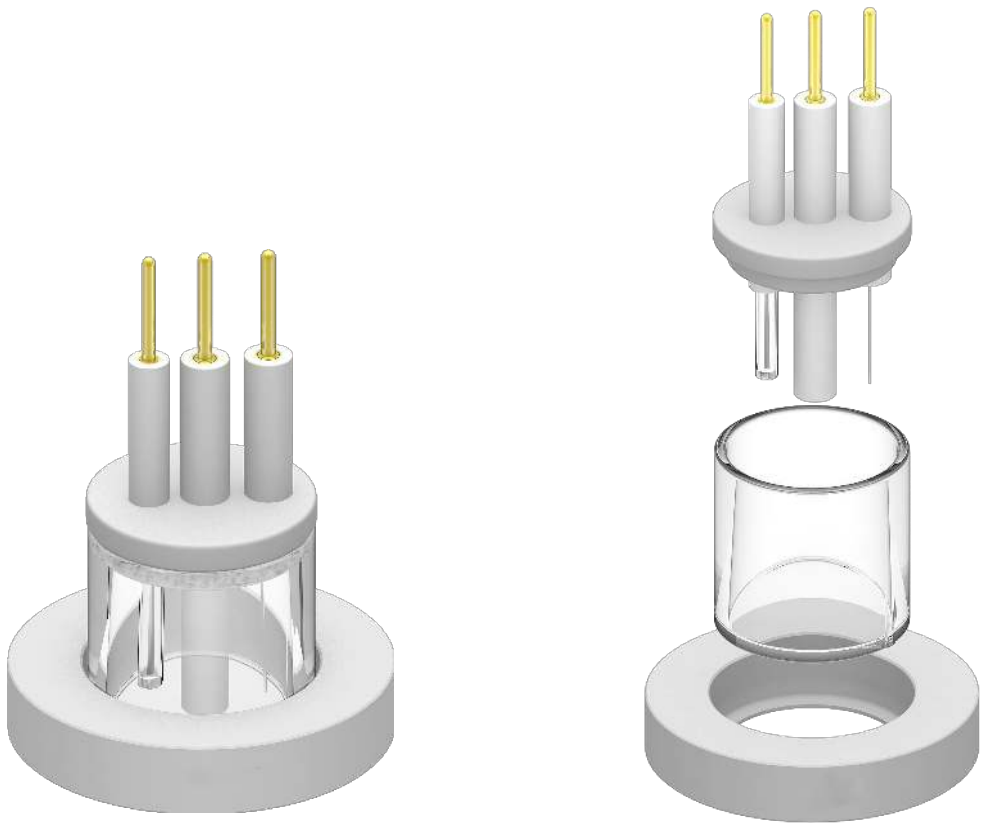


Item No.	Outer Diameter (mm)	Inner Diameter (mm)	Height (mm)	Price		Item No.	Outer Diameter (mm)	Inner Diameter (mm)	Height (mm)	Price
1	15	12	20	230		3	25	15	32	300
2	25	20	30	260		4	50	46	50	330
It is compatible with electrochemiluminescence instruments and supports nitrogen purging for deoxygenation treatment.										
Prices are subject to adjustment, and the latest quotation shall prevail.										

Committed to the R&D and manufacturing of electrochemical equipment.

石英电化学池系列

Quartz Electrochemical Cell Series

本系列电化学池采用全石英材质，具有优异的耐腐蚀性和化学稳定性，适用于各种腐蚀性电解液的测试。池体设计紧凑，操作简便，具有良好的密封性能，能够有效防止电解液泄漏。电极采用高纯度铂或金制成，表面光滑，反应活性高。该系列电化学池广泛应用于电化学基础研究、材料腐蚀研究、环境检测等领域。可根据用户需求定制不同规格和配置的型号。

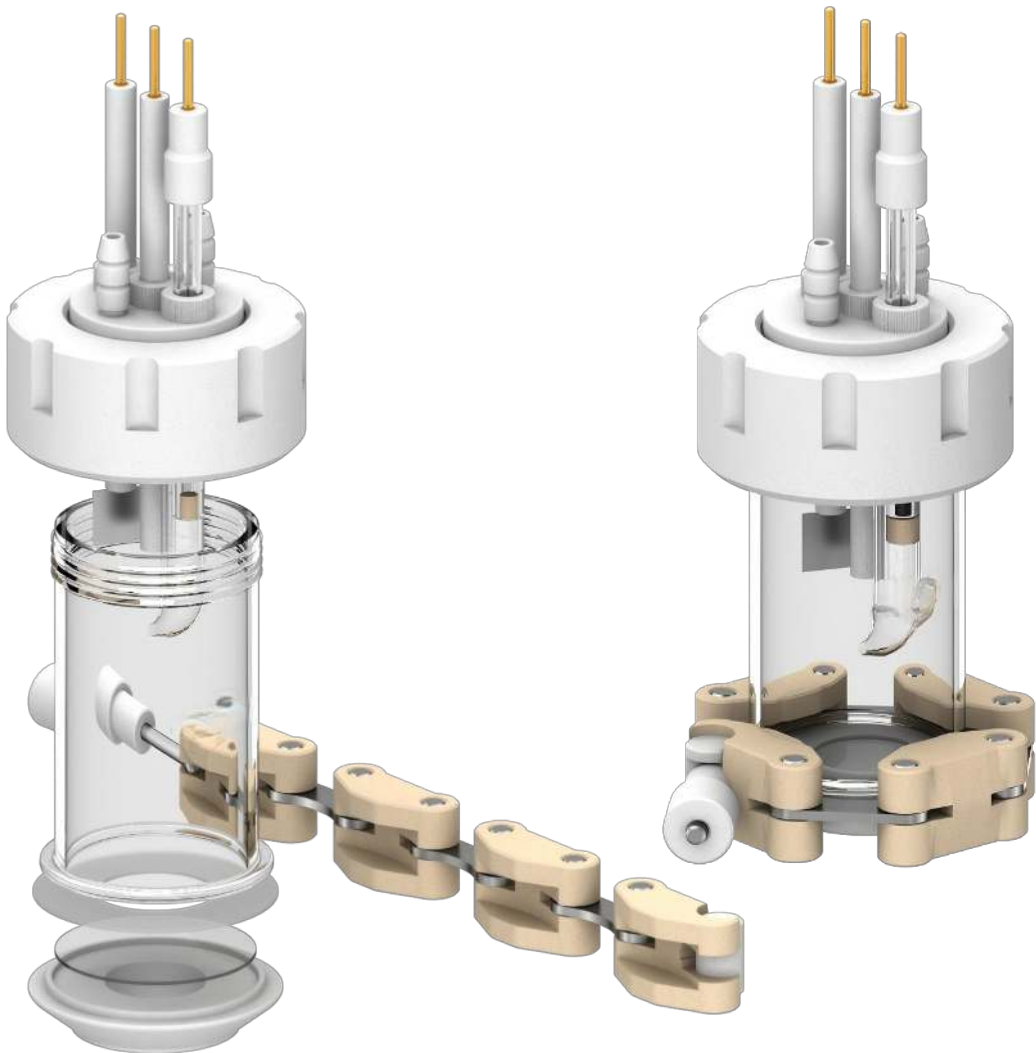

Volume (mL)	Outer Diameter (mm)	Inner Diameter (mm)	Height (mm)	Price
50ml	40	35	80	430
This electrochemical cell has a fully hermetic version capable of nitrogen purging for deoxygenation and vacuum pumping. Please refer to Model C015-2 for details.				
Prices are subject to adjustment, and the latest quotation shall prevail.				



第 25 页 共 53 页


Committed to the R&D and manufacturing of electrochemical equipment.

本公司自主研发设计，采用进口材料，精工制造，性能卓越，使用寿命长。


Quartz Electrochemical Cell Series

一、产品特点

- 1. 采用进口石英材料，耐腐蚀性强，使用寿命长。
- 2. 设计合理，结构紧凑，操作方便。
- 3. 采用进口密封材料，密封性能好，无泄漏。
- 4. 采用进口电极材料，电化学性能优异。
- 5. 采用进口温度控制装置，温度控制精度高。
- 6. 采用进口流量控制装置，流量控制精度高。
- 7. 采用进口压力控制装置，压力控制精度高。
- 8. 采用进口数据采集系统，数据采集精度高。
- 9. 采用进口安全防护装置，安全防护性能好。
- 10. 采用进口售后服务系统，售后服务周到。

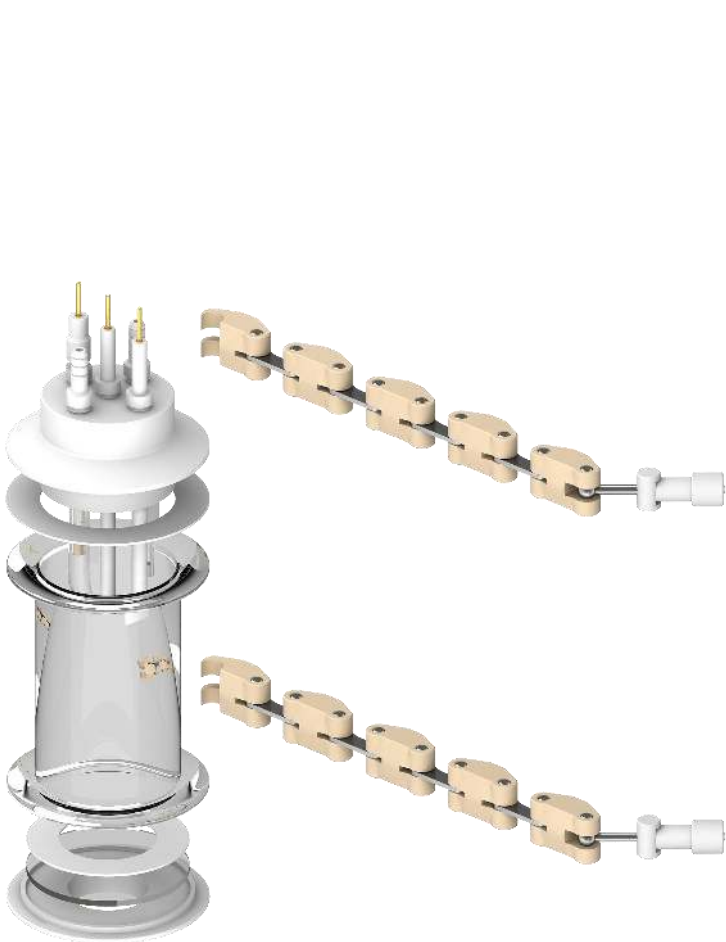

拆解

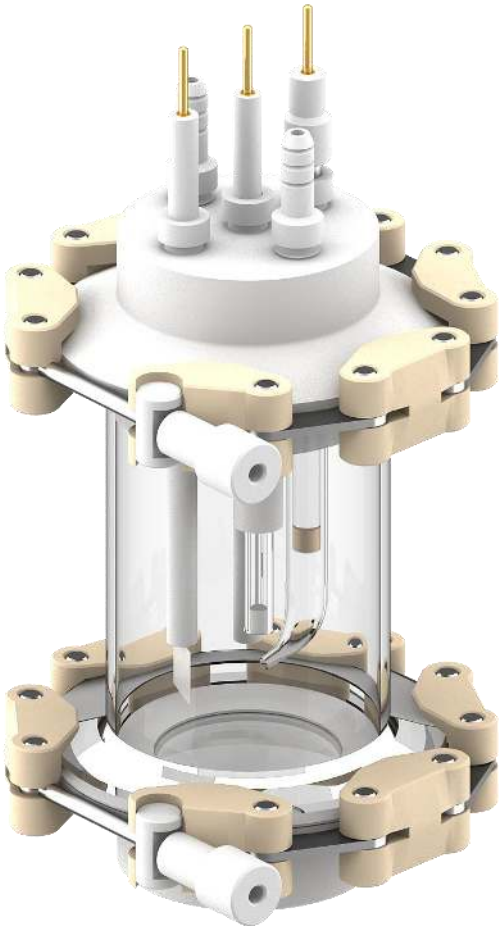

组合

Volume (mL)	Outer Diameter (mm)	Inner Diameter (mm)	Height (mm)	Price
50ml	55	50	52 (有效高度 35)	1600
This electrochemical cell has a fully sealed version equipped with valves, which supports nitrogen purging for deoxygenation and vacuum pumping. Please refer to Model C017-2 for details.				
Prices are subject to adjustment, and the latest quotation shall prevail.				

Committed to the R&D and manufacturing of electrochemical equipment.

本公司自主研发生产各种电化学测试设备，产品广泛应用于材料、能源、环境、生物等领域。我们拥有完善的质量管理体系，确保产品质量稳定可靠。我们致力于为客户提供优质的产品和服务，不断提升客户满意度。

Quartz Electrochemical Cell Series

石英电化学池系列是本公司自主研发生产的一种高精度电化学测试设备。该系列设备采用优质石英材料制造，具有优异的耐腐蚀性和稳定性。设备结构紧凑，操作简便，适用于各种电化学测试，如极化曲线、循环伏安法等。该系列设备广泛应用于材料、能源、环境、生物等领域，为客户提供准确可靠的测试数据。我们拥有完善的质量管理体系，确保产品质量稳定可靠。我们致力于为客户提供优质的产品和服务，不断提升客户满意度。



Volume (mL)	Outer Diameter (mm)	Inner Diameter (mm)	Height (mm)	Price
50ml	55	50	52 (Effective height: 35)	600
The above prices do not include the cost of valves. An additional cost of 100 will be charged for each single valve fitted. The cell supports nitrogen purging for deoxygenation and vacuum pumping operations.				
Prices are subject to revision, and the latest official quotation shall be binding.				

Committed to the R&D and manufacturing of electrochemical equipment.

Quartz Electrochemical Cell Series

1. 2019年12月31日，公司总资产为1,000,000,000.00元，净资产为500,000,000.00元。

[illegible]

Volume (mL)	Price		Volume (ml)	Pri ce
50ml	730		200ml	1100
100ml	830		250ml	1200
150ml	100		500ml	1400
This electrochemical cell is available in a fully hermetic version equipped with valves, supporting nitrogen purging for deoxygenation and vacuum pumping. Please refer to Model C018-2 for relevant specifications.				
Prices are subject to adjustment, and the latest quotation shall prevail.				

Committed to the R&D and manufacturing of electrochemical equipment.

Quartz Electrochemical Cell Series

本系列电化学池采用石英材质，具有优异的耐腐蚀性能，适用于各种腐蚀性电解液的测试。该系列电化学池设计紧凑，操作简便，广泛应用于电化学基础研究、材料腐蚀研究、电池性能测试等领域。本系列电化学池具有多种规格，以满足不同实验需求。本系列电化学池采用先进的密封技术，确保实验过程中无泄漏。本系列电化学池具有优异的机械强度，能够承受一定的操作压力。本系列电化学池具有优异的热稳定性，能够在较宽的温度范围内正常工作。本系列电化学池具有优异的电绝缘性能，确保实验安全。本系列电化学池具有优异的可重复性，确保实验结果的准确性。本系列电化学池具有优异的使用寿命，降低实验成本。本系列电化学池具有优异的可维护性，方便用户进行日常维护。本系列电化学池具有优异的可操作性，降低实验难度。本系列电化学池具有优异的可兼容性，可与多种电化学测试系统兼容。本系列电化学池具有优异的可扩展性，可根据用户需求进行定制。本系列电化学池具有优异的可追溯性，确保产品质量。本系列电化学池具有优异的可认证性，符合相关行业标准。本系列电化学池具有优异的可复制性，方便用户进行实验复现。本系列电化学池具有优异的可集成性，可与实验室其他设备集成使用。本系列电化学池具有优异的可升级性，可根据技术发展进行升级。本系列电化学池具有优异的可兼容性，可与多种电化学测试系统兼容。本系列电化学池具有优异的可扩展性，可根据用户需求进行定制。本系列电化学池具有优异的可追溯性，确保产品质量。本系列电化学池具有优异的可认证性，符合相关行业标准。本系列电化学池具有优异的可复制性，方便用户进行实验复现。本系列电化学池具有优异的可集成性，可与实验室其他设备集成使用。本系列电化学池具有优异的可升级性，可根据技术发展进行升级。



Volume (mL)	Price		Volume (mL)	Price
50ml	800		200ml	1200
100ml	900		250ml	1300
150ml	1000		500ml	1460
The above prices exclude the cost of valves. A surcharge of 100 will be applied for each additional single valve. The cell supports nitrogen purging for deoxygenation and vacuum pumping operations.				
Prices are subject to revision, and the latest official quotation shall prevail.				

Committed to the R&D and manufacturing of electrochemical equipment.

Photoelectrocatalytic Electrochemical Cell Series

本系列光催化电解池采用全密封设计，支持氮气吹扫，适用于光催化、电催化、光电催化等实验。

一、产品特点

1. 全密封设计：采用全密封设计，防止反应液泄漏，确保实验安全。

2. 支持氮气吹扫：内置氮气吹扫系统，可有效去除反应液中的溶解氧，提高实验精度。

3. 多种规格：提供50ml、100ml、150ml等多种规格，满足不同实验需求。

4. 易于操作：采用模块化设计，安装简便，操作灵活。

5. 耐腐蚀性强：采用高品质材料制造，具有良好的耐腐蚀性能，使用寿命长。


6. 兼容性强：可与多种电化学工作站兼容，方便数据记录与分析。

7. 结构紧凑：整体结构紧凑，占用空间小，便于实验室存放。

8. 维护方便：设计有便捷的维护接口，方便用户进行日常维护与清洗。

9. 安全可靠：内置安全保护装置，防止过压、过热等情况发生，保障实验安全。

10. 性价比高：在保证性能的前提下，力求降低成本，为用户提供高性价比的选择。

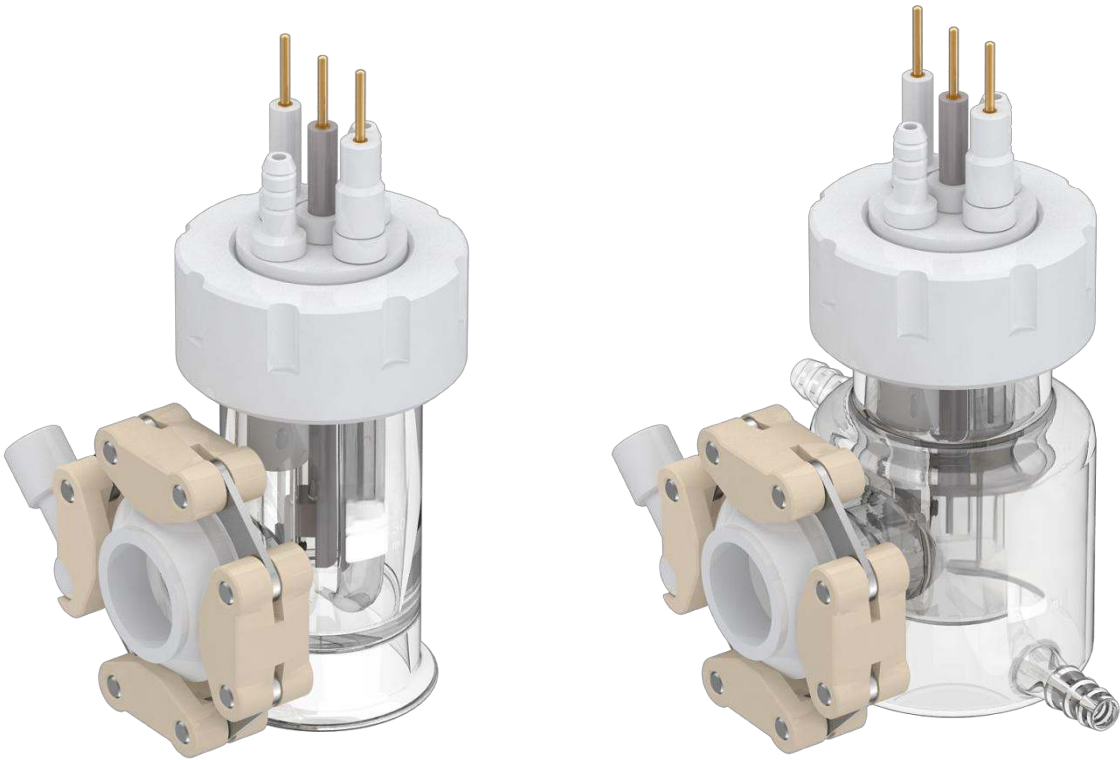

Volume	Single-layer Price	Double-layer Price
50ml	300	360
100ml	300	360
150ml	330	400
This photoelectrochemical cell is available in a fully sealed version equipped with valves, which supports nitrogen purging for deoxygenation and vacuum pumping. Refer to Model C019-2 for details.		
The listed dimensions are standard specifications, and customized sizes are available upon demand. Prices are subject to adjustment, and the latest quotation shall prevail.		

Committed to the R&D and manufacturing of electrochemical equipment.

Photoelectrocatalytic Electrochemical Cell Series

[illegible][illegible]

[illegible]

QUESTION

[illegible]

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840.

[illegible]

00000000 0000 0 0000 0000 000000 000000 00 00000000 000 000 000 00000000 00000000 00 00000000000000 000000000000 0000

[illegible]

| Volume (mL) | Single-layer Price | Double-layer Price |
|--|--------------------|--------------------|
| 50ml | 330 | 400 |
| 100ml | 330 | 400 |
| 150ml | 360 | 430 |
| The above prices do not include the cost of valves. A surcharge of 300 CNY will be charged for each additional single valve. The cell supports nitrogen purging for deoxygenation and vacuum pumping operations. | | |
| All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest official quotation shall prevail. | | |

Photoelectrocatalytic Electrochemical Cell Series

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。


本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

本系列电化学池采用全氟聚醚密封，耐腐蚀性强，使用寿命长。池体采用透明材质，便于观察反应过程。池盖设计有进气口和出气口，方便气体交换。池体底部设有搅拌装置，确保反应物充分混合。池体侧面设有多个接口，方便连接管路和电极。池体整体结构紧凑，操作简便，适用于实验室研究和工业生产。

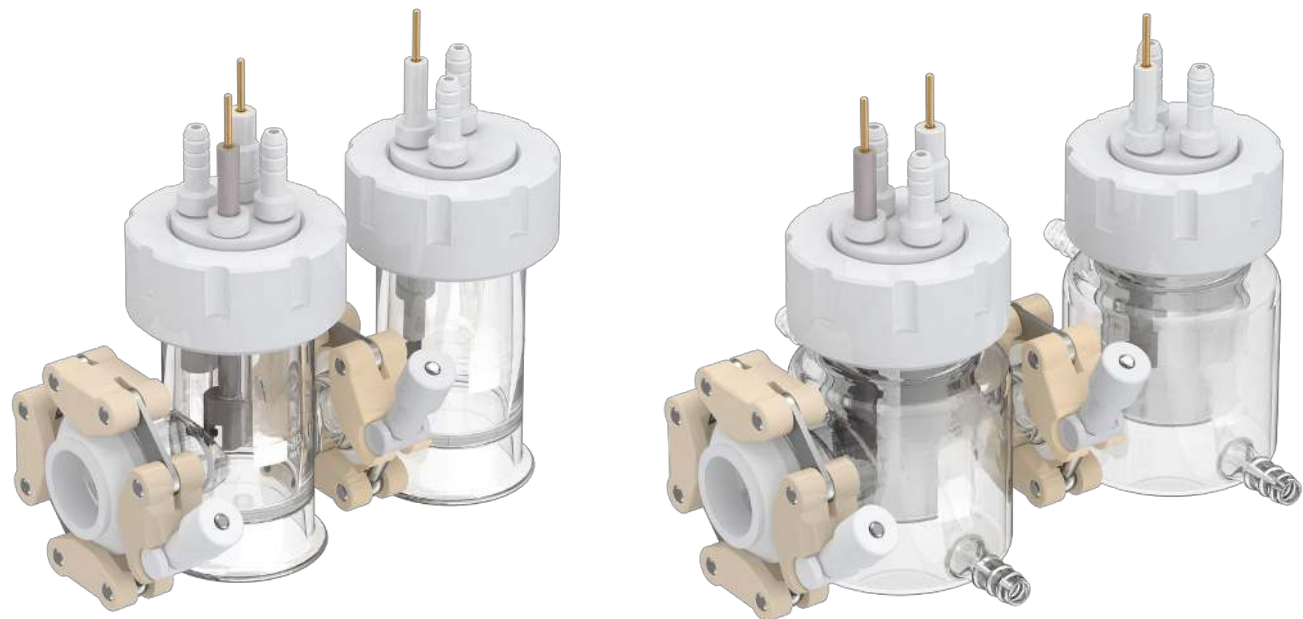

| Volume (mL) | Single-layer Price | Double-layer Price | Volume (mL) | Single-layer Price | Double-layer Price |
|---|--------------------|--------------------|-------------|--------------------|--------------------|
| 30ml | 460 | 600 | 150ml | 630 | 760 |
| 50ml | 460 | 600 | 200ml | 700 | 830 |
| 100ml | 400 | 630 | 250ml | 700 | 830 |
| An extra charge of 34 will be added to the original price for the addition of a sampling port. | | | | | |
| A fully hermetic version equipped with valves is available for this cell, which supports nitrogen purging for deoxygenation and vacuum pumping. Please refer to Model C023-2 for details. | | | | | |
| All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to revision, and the latest official quotation shall prevail. | | | | | |

[illegible]第 33 页 共 53 页

Committed to the R&D and manufacturing of electrochemical equipment.

Photoelectrocatalytic Electrochemical Cell Series

A horizontal bar consisting of 60 small squares arranged in a single row. Each square is either filled (black) or empty (white). The pattern of filled and empty squares represents a binary sequence.

QUESTION

[illegible]

000000000000 00 000000 0000 000 0 000000 00 0000 00000000 0000 000000 0000000000 000000 000000 000000 000000

[illegible]


0000 00000000 0000 000000 00000000 000000 0000 000000 00000000 0000000000 00 00 000 0000000000 0 00 000000 000 00 00000000 00 0000 0000000000 00 00

[illegible][illegible]

00000000 0 000 0 0000 00000 000000 00000 0000000 000000000000 0 000000 000000000000 0000000000000 0000000000000

□□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□

0 0 000 00000 00000 00000000000000000 000000000000000 0 00000000 0 000 0 00000 00000000 0 00000000 00000000000000000 0000000000

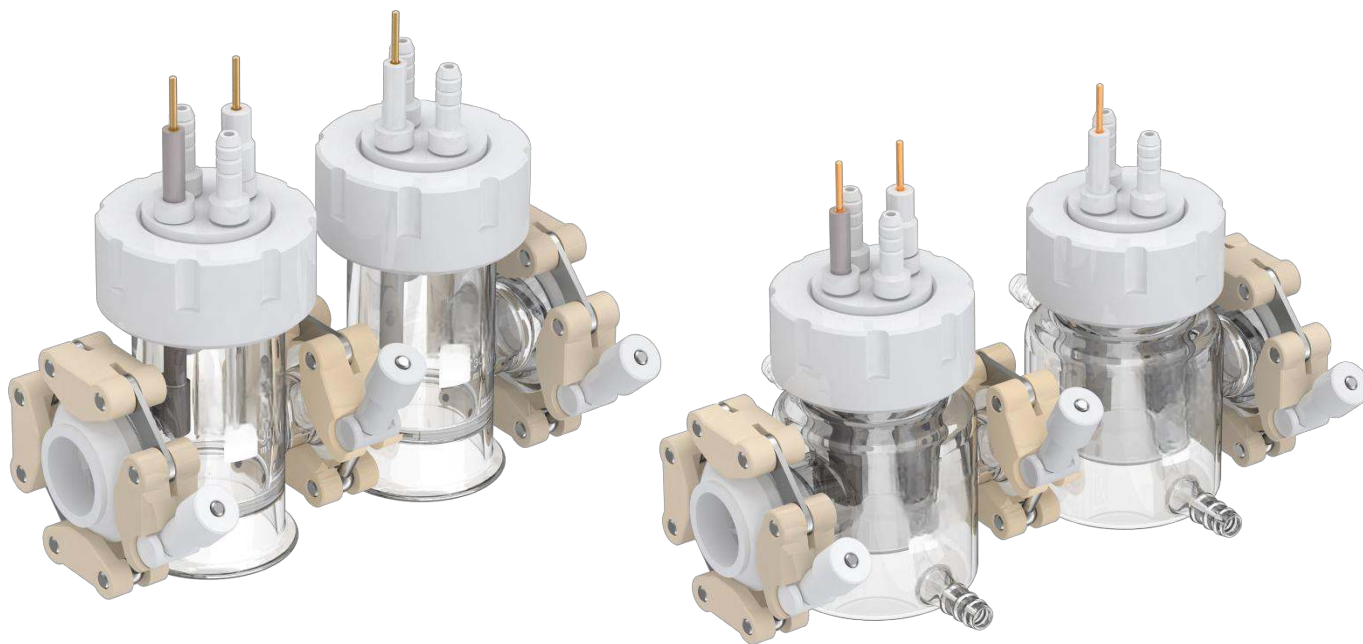[illegible]

| Volume (mL) | Single-layer Price | Double-layer Price | | Volume (mL) | Single-layer Price | Double-layer Price |
|-------------|--------------------|--------------------|--|-------------|--------------------|--------------------|
| 30ml | 1800 | 2200 | | 150ml | 2300 | 2700 |
| 50ml | 1800 | 2200 | | 200ml | 2500 | 2900 |
| 100ml | 1900 | 2300 | | 250ml | 2500 | 2900 |


An extra fee of 100 CNY will be charged on the original price for the addition of a sampling port.

A fully hermetic version equipped with valves is available for this cell, which supports nitrogen purging for deoxygenation and vacuum pumping functions. Please refer to Model C024-2 for relevant information.

All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to adjustment, and the latest official quotation shall prevail.

Photoelectrocatalytic Electrochemical Cell Series

1. 2019 年 12 月 31 日，A 公司“应付账款”科目所属各明细科目的期末贷方余额如下：应付甲公司账款 100 万元，应付乙公司账款 200 万元，应付丙公司账款 300 万元，应付丁公司账款 400 万元。2020 年 1 月 1 日，A 公司开始与供应商进行重组谈判。

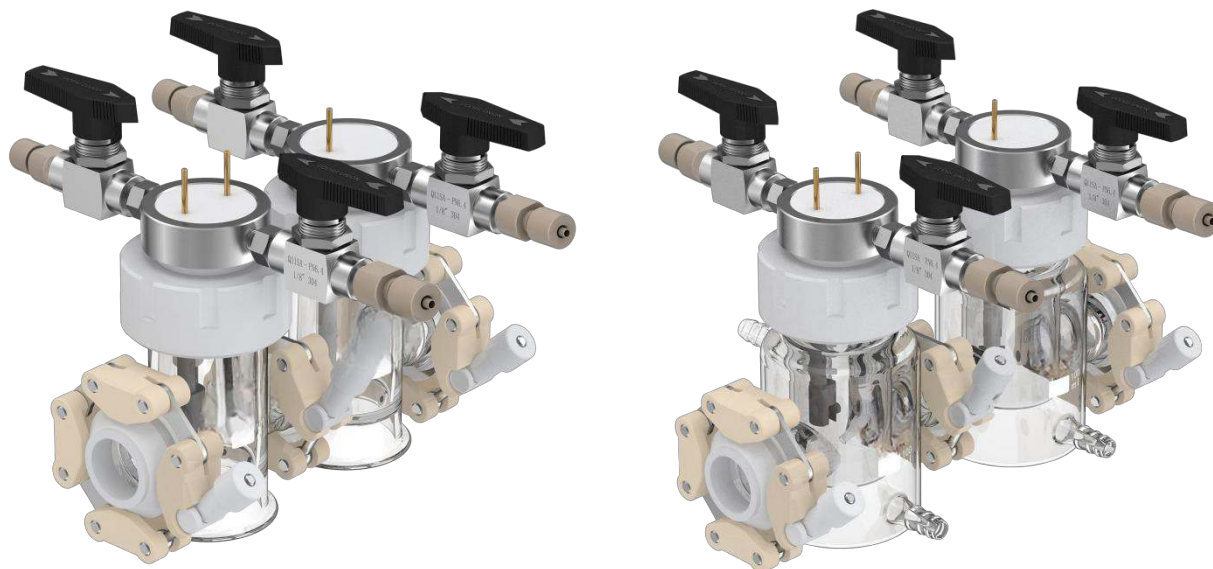[illegible]

| Volume (mL) | Single-layer Price | Double-layer Price | | Volume (mL) | Single-layer Price | Double-layer Price |
|---|--------------------|--------------------|--|-------------|--------------------|--------------------|
| 30ml | 2000 | 2400 | | 150ml | 2500 | 2900 |
| 50ml | 2000 | 2400 | | 200ml | 2700 | 3100 |
| 100ml | 2100 | 2500 | | 250ml | 2700 | 3100 |
| An extra charge of 34 will be added to the base price when a sampling port is installed. | | | | | | |
| The prices listed above do not include the cost of valves. A surcharge of 300 CNY is required for each additional single valve, which supports nitrogen purging for deoxygenation and vacuum pumping functions. | | | | | | |
| All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | | | |

1. 2019年12月31日，公司总资产为1,000,000,000.00元，净资产为500,000,000.00元，营业收入为1,200,000,000.00元，净利润为100,000,000.00元。

[illegible][illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

本系列电化学池为实验室研究光催化、电催化、光电催化等反应提供理想的实验平台。该系列电化学池具有结构简单、操作方便、反应效率高、使用寿命长等特点。适用于各种液体反应体系，如染料降解、有机合成、废水处理等。该系列电化学池采用高品质材料制造，具有良好的耐腐蚀性和稳定性。同时，我们还提供定制化的服务，以满足不同客户的需求。

一、产品特点

1. 结构紧凑，占地面积小，便于实验室使用。

2. 采用高品质材料制造，具有良好的耐腐蚀性和稳定性。

3. 操作方便，无需复杂的操作步骤，即可进行实验。

4. 反应效率高，能够在较短时间内完成反应。

5. 使用寿命长，维护简单，无需频繁更换部件。

6. 适用于各种液体反应体系，如染料降解、有机合成、废水处理等。

7. 提供定制化的服务，以满足不同客户的需求。

8. 具有良好的密封性能，能够有效防止反应液泄漏。

9. 采用先进的搅拌系统，确保反应液充分混合。

10. 配备安全保护装置，防止意外事故发生。

11. 外观设计简洁大方，符合实验室设备的要求。

12. 具有良好的性价比，是您实验室的理想选择。

13. 我们提供完善的售后服务，确保您的设备正常运行。

14. 该系列电化学池已通过国家相关标准认证，质量有保障。

15. 我们拥有专业的研发团队，能够为您提供技术支持。



| Volume (mL) | Single-layer Price | Double-layer Price | Volume (mL) | Single-layer Price | Double-layer Price |
|---|--------------------|--------------------|-------------|--------------------|--------------------|
| 30ml | 500 | 660 | 150ml | 660 | 830 |
| 50ml | 500 | 660 | 200ml | 730 | 900 |
| 100ml | 530 | 700 | 250ml | 730 | 900 |
| An additional fee of 34 will be charged on the base price for the installation of a sampling port. | | | | | |
| A fully hermetic version equipped with valves is available for this cell, which supports nitrogen purging for deoxygenation and vacuum pumping functions. Please refer to Model C025-2 for details. | | | | | |
| All listed dimensions are standard specifications, and customized sizes are available upon demand. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | | |

Photoelectrocatalytic Electrochemical Cell Series

本系列电化学池为实验室常用的小型电化学池，适用于各种电化学实验，如电催化、电沉积、电氧化、电还原等。本系列电化学池具有结构简单、操作方便、性能稳定等特点，是实验室进行电化学研究的理想选择。

本系列电化学池采用全玻璃材质，耐腐蚀性强，使用寿命长。池体内部设有搅拌装置，可有效防止电极表面沉积物的形成，提高实验的重复性。此外，本系列电化学池还配备了多种规格的电极，以满足不同实验的需求。本系列电化学池广泛应用于材料科学、化学、生物、环境等领域，是进行电化学研究的必备设备。

本系列电化学池的容量分为30ml、50ml、100ml、150ml、200ml、250ml六种规格，以满足不同实验的需求。本系列电化学池的价格如下表所示：

| Volume (mL) | Single-layer Price | Double-layer |
|-------------|--------------------|--------------|
| 30ml | 560 | 730 |
| 50ml | 560 | 730 |
| 100ml | 600 | 760 |
| 150ml | 730 | 900 |
| 200ml | 800 | 960 |
| 250ml | 800 | 960 |

An extra charge of 34 will be added to the base price for the installation of a sampling port.

The above prices exclude the cost of valves. A surcharge of 100 is required for each additional single valve, which enables nitrogen purging for deoxygenation and vacuum pumping functions.

All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to revision, and the latest official quotation shall prevail.




| Volume (mL) | Single-layer Price | Double-layer | Volume (mL) | Single-layer Price | Double-layer |
|--|--------------------|--------------|-------------|--------------------|--------------|
| 30ml | 560 | 730 | 150ml | 730 | 900 |
| 50ml | 560 | 730 | 200ml | 800 | 960 |
| 100ml | 600 | 760 | 250ml | 800 | 960 |
| An extra charge of 34 will be added to the base price for the installation of a sampling port. | | | | | |
| The above prices exclude the cost of valves. A surcharge of 100 is required for each additional single valve, which enables nitrogen purging for deoxygenation and vacuum pumping functions. | | | | | |
| All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to revision, and the latest official quotation shall prevail. | | | | | |

Full PTFE Photoelectrochemical Cell Series

Full PTFE Photoelectrochemical Cell Series

Full PTFE Photoelectrochemical Cell Series

Full PTFE Photoelectrochemical Cell Series

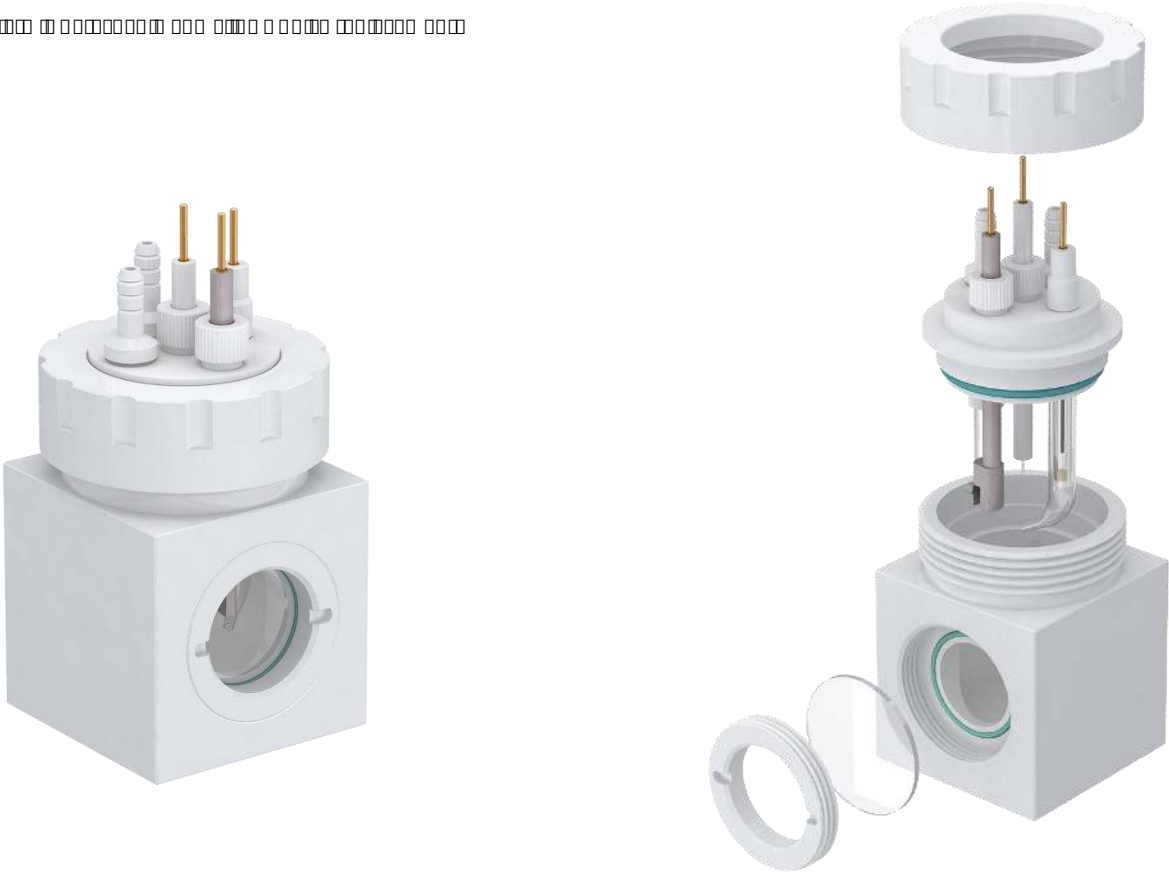


| Volume (mL) | Price | | Volume (mL) | Price |
|---|-------|--|-------------|-------|
| 50ml | 340 | | 200ml | 600 |
| 100ml | 340 | | 250ml | 870 |
| 150ml | 440 | | 500ml | 1200 |
| A fully hermetic version equipped with valves is available for this cell, which supports nitrogen purging for deoxygenation and vacuum pumping functions. Please refer to Model C026-2 for details. | | | | |
| All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | |

Full PTFE Photoelectrochemical Cell Series

本系列光电解池采用全PTFE材质，具有耐腐蚀、耐高温、高纯度的特点，适用于各种光催化反应的研究。

一、产品特点

- 1. 全PTFE材质，耐腐蚀性强，适用于各种腐蚀性液体的反应。
- 2. 结构设计合理，密封性好，防止反应液泄漏。
- 3. 操作简便，易于清洗和维护。
- 4. 反应室容积大，适合大规模反应。
- 5. 配备有进气口和出气口，方便气体的通入和排出。
- 6. 反应室内部设有搅拌装置，确保反应物充分混合。
- 7. 反应室顶部设有观察窗，便于实时监测反应过程。
- 8. 反应室底部设有排液口，方便反应结束后液体的排出。
- 9. 反应室内部设有温度控制装置，可实现恒温反应。
- 10. 反应室内部设有光照装置，可实现光照反应。

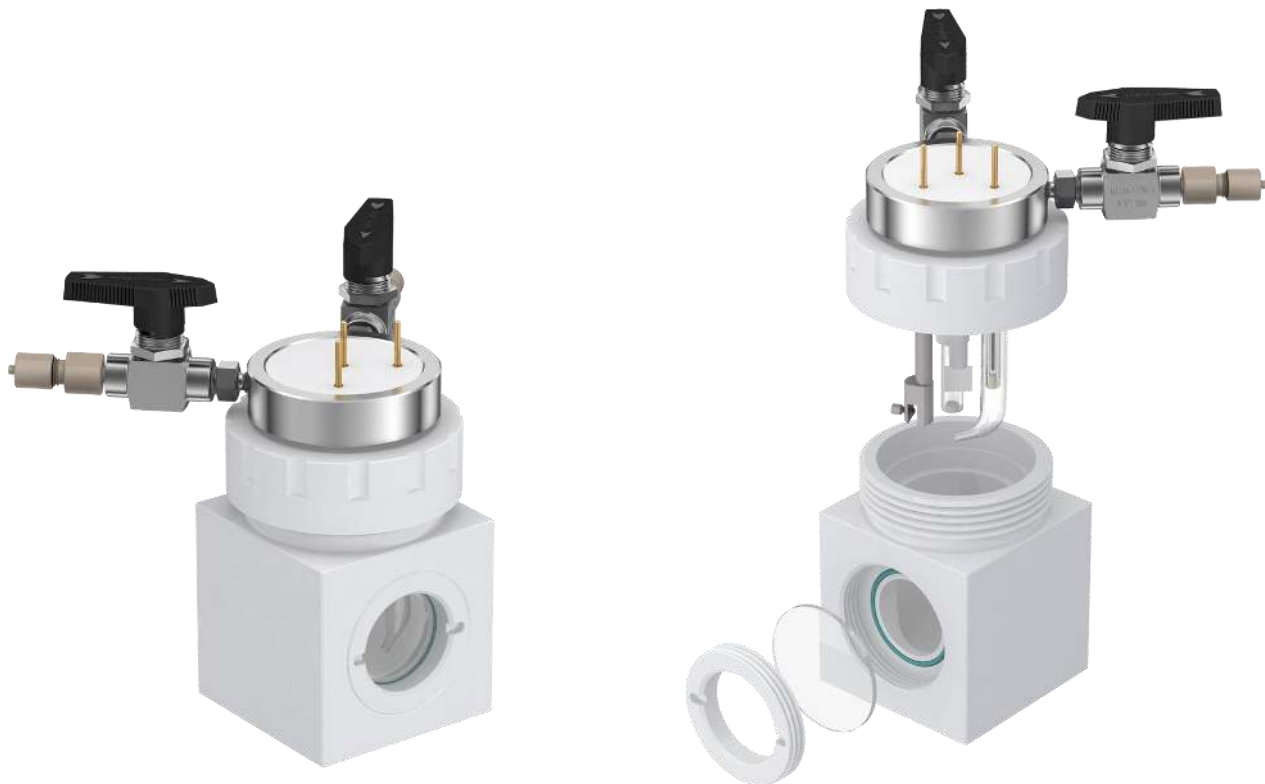


| Volume (mL) | Price | | Volume (mL)) | Price |
|---|-------|--|--------------|-------|
| 50ml | 380 | | 200ml | 640 |
| 100ml | 380 | | 250ml | 900 |
| 150ml | 480 | | 500ml | 1300 |
| The above prices exclude the cost of valves. An extra charge of 100 applies for each additional single valve, which enables nitrogen purging for deoxygenation and vacuum pumping capabilities. | | | | |
| All listed dimensions are standard specifications, and custom tailored sizes are available upon demand. Prices are subject to revision, and the latest official quotation shall be binding. | | | | |

本系列光催化反应池采用全PTFE材质，具有耐腐蚀、耐高温、高纯度的特点，适用于各种光催化反应。

一、产品特点

- 1. 全PTFE材质，耐腐蚀、耐高温、高纯度。
- 2. 采用先进的密封技术，确保反应池的密封性。
- 3. 反应池内部设有搅拌装置，确保反应物的均匀混合。
- 4. 反应池顶部设有进气口和出气口，方便气体的进出。
- 5. 反应池底部设有排水口，方便反应后的液体排出。
- 6. 反应池整体结构紧凑，占地面积小。
- 7. 反应池操作简便，易于维护。
- 8. 反应池适用于各种光催化反应，如光解水、光降解有机物等。
- 9. 反应池可根据客户需求进行定制。
- 10. 反应池具有良好的性价比。

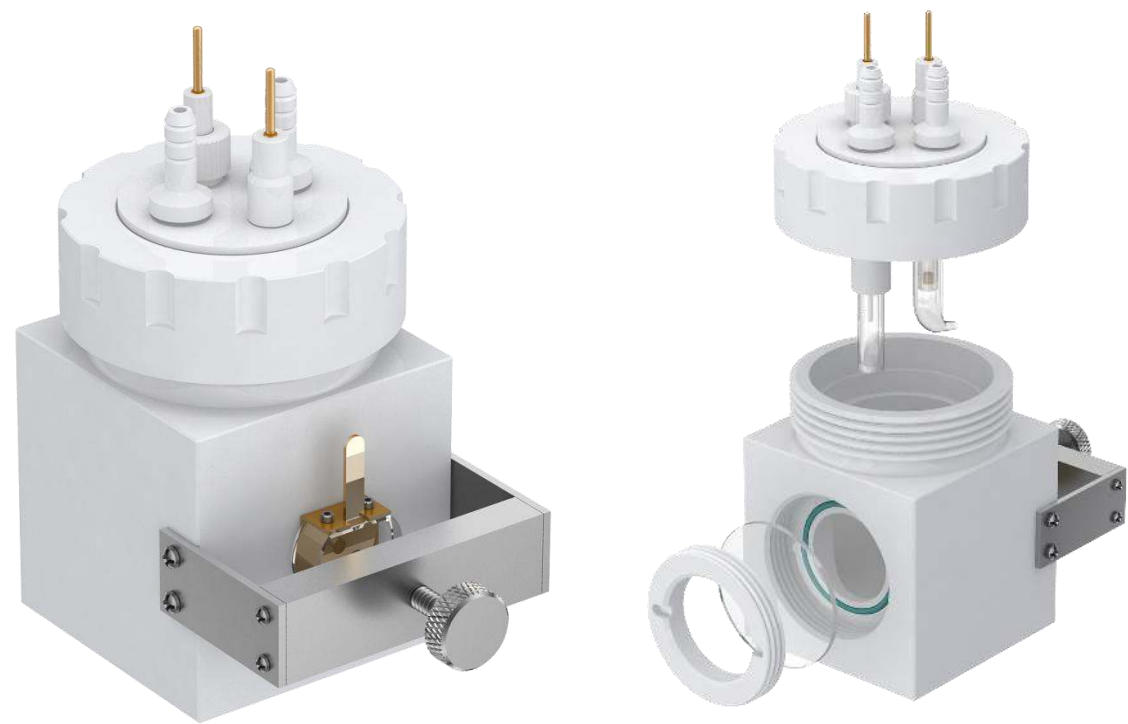

| Volume (mL) | Price | | Volume (mL) | Price |
|--|-------|--|-------------|-------|
| 50ml | 420 | | 200ml | 700 |
| 100ml | 420 | | 250ml | 950 |
| 150ml | 520 | | 500ml | 1300 |
| A fully hermetic version fitted with valves is available for this cell, supporting nitrogen purging for deoxygenation and vacuum pumping functions. Please refer to Model C026-4 for relevant information. | | | | |
| All listed dimensions are standard specifications, and customized sizes can be produced upon request. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | |

Committed to the R&D and manufacturing of electrochemical equipment.

Full PTFE Photoelectrochemical Cell Series

本系列光电化学池采用全PTFE材质，具有耐腐蚀、易清洗、寿命长等优点，适用于各种光电化学反应的研究。

产品特点

1. 全PTFE材质，耐腐蚀性强，适用于各种腐蚀性溶液。

2. 结构简单，易于清洗和维护，使用寿命长。

3. 采用先进的密封技术，确保反应过程中无泄漏。

4. 可根据客户需求定制不同规格和配置。

5. 适用于各种光电化学反应的研究，如光催化、光电合成等。

6. 具有良好的稳定性和重复性，实验结果可靠。

7. 操作简便，易于上手，适合实验室使用。

8. 可根据不同的反应体系选择不同的电极材料和电解质。


9. 具有良好的性价比，是您进行光电化学研究的理想选择。

10. 我们提供完善的售后服务和技术支持，确保您的实验顺利进行。

11. 可根据您的具体需求提供定制化的解决方案。

12. 我们拥有专业的研发团队和先进的生产设备，确保产品质量。

13. 我们致力于为您提供最优质的产品和服务。

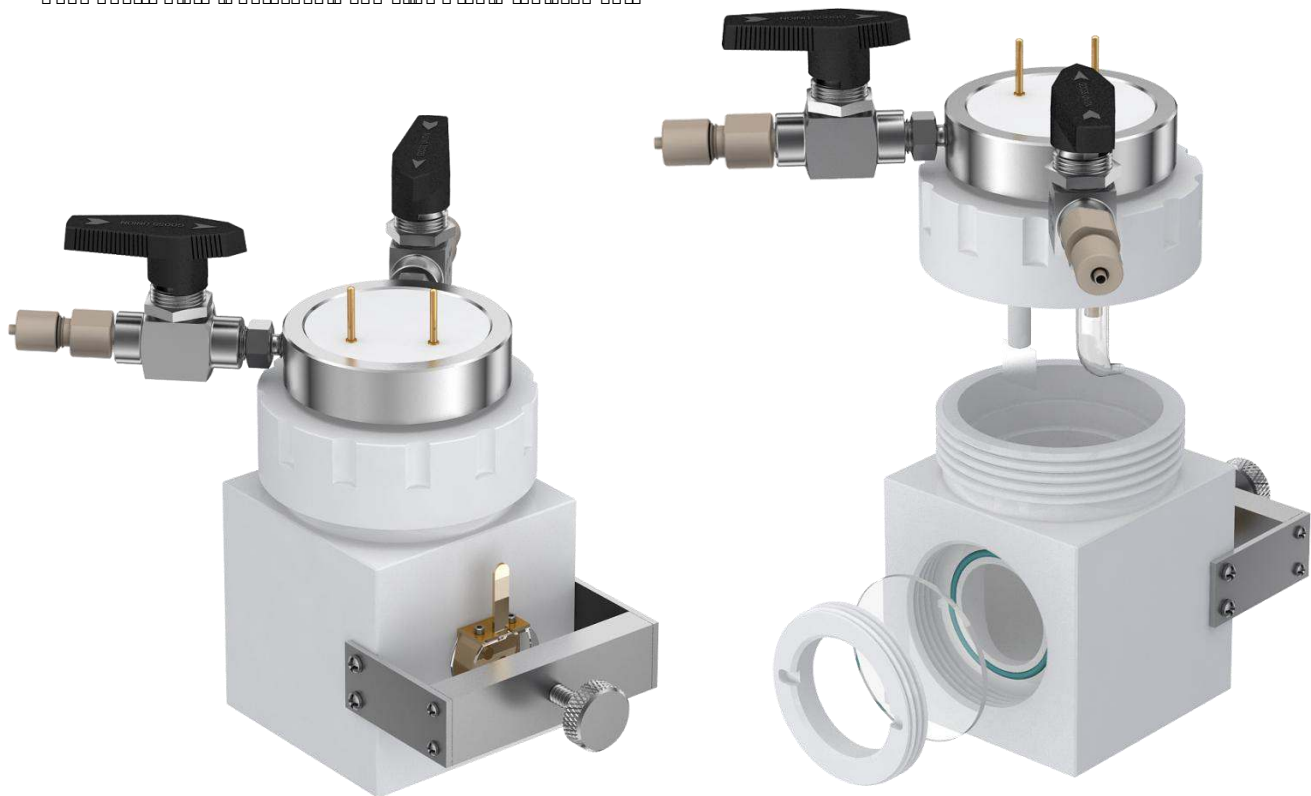

| 容Volume (mL) | Price | | Volume (mL) | Price |
|---|-------|--|-------------|-------|
| 50ml | 500 | | 200ml | 720 |
| 100ml | 500 | | 250ml | 1000 |
| 150ml | 550 | | 500ml | 1400 |
| The above prices exclude the cost of valves. A surcharge of 100 will be charged for each additional single valve, which supports nitrogen purging for deoxygenation and vacuum pumping functions. | | | | |
| All listed dimensions are standard sizes, and customized specifications are available upon request. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | |

Full PTFE Photoelectrochemical Cell Series

本系列光催化反应池采用全PTFE材质，具有耐腐蚀、耐高温、高纯度的特点，适用于各种光催化反应。

产品特点

1. 全PTFE材质：采用全氟乙烯丙烯（PTFE）材料制造，具有优异的耐腐蚀性能，可耐受强酸、强碱、强氧化剂等腐蚀性介质的侵蚀，使用寿命长。

2. 高纯度：反应池内部经过严格清洗和抛光处理，表面光滑，无杂质，可有效避免杂质对光催化反应的干扰。

3. 耐高温：PTFE材料具有优异的耐高温性能，可在150℃以上的高温环境下长期使用。

4. 耐腐蚀：PTFE材料具有优异的耐腐蚀性能，可耐受各种腐蚀性介质的侵蚀，确保反应池的长期稳定运行。

5. 高纯度：反应池内部经过严格清洗和抛光处理，表面光滑，无杂质，可有效避免杂质对光催化反应的干扰。

6. 结构紧凑：反应池采用模块化设计，结构紧凑，占地面积小，便于实验室操作。

7. 操作简便：反应池配备有进液口、出液口、排气口等接口，操作简便，易于清洗和维护。

8. 适用范围广：该系列反应池适用于各种光催化反应，如光催化降解有机污染物、光催化合成有机化合物等。



| Volume (mL) | Price | | Volume (mL) | Price |
|---|-------|--|-------------|-------|
| 30ml | 630 | | 150ml | 1100 |
| 40ml | 630 | | 200ml | 1300 |
| 50ml | 730 | | 250ml | 1300 |
| 100ml | 730 | | 500ml | 2500 |
| A fully hermetic version equipped with valves is available for this cell, which supports nitrogen purging for deoxygenation and vacuum pumping. Please refer to Model C027-2 for details. | | | | |
| All listed dimensions are standard specifications, and customized sizes are available upon request. Prices are subject to change, and the latest official quotation shall prevail. | | | | |

Full PTFE Photoelectrochemical Cell Series

本系列光电解池采用全PTFE材质，具有耐腐蚀、耐高温、高纯度的特点，适用于各种光催化反应的研究。

产品特点

- 1. 全PTFE材质，耐腐蚀性强，适用于各种腐蚀性液体的反应。
- 2. 采用先进的密封技术，确保反应体系的密闭性，防止气体泄漏。
- 3. 内置磁力搅拌器，可实现反应体系的均匀混合，提高反应效率。
- 4. 配备高精度温度控制系统，可在宽温度范围内精确控温。
- 5. 设计有气体进出口，方便进行气体的通入和排出。
- 6. 结构紧凑，操作简便，易于维护和清洗。
- 7. 提供多种规格选择，满足不同容量反应的需求。
- 8. 采用优质材料制造，使用寿命长，稳定性高。
- 9. 配备安全保护装置，确保实验过程的安全。
- 10. 可根据客户需求进行定制，满足特殊实验要求。




| Volume (mL) | Price | | 容积 (ml) | Price |
|--|-------|--|---------|-------|
| 30ml | 700 | | 150ml | 1200 |
| 40ml | 700 | | 200ml | 1400 |
| 50ml | 800 | | 250ml | 1400 |
| 100ml | 800 | | 500ml | 2600 |
| The above prices do not include the cost of valves. A surcharge of 100 will be charged for each additional single valve, which supports nitrogen purging for deoxygenation and vacuum pumping functions. | | | | |
| All listed dimensions are standard sizes, and customized products are available according to requirements. Prices are subject to adjustment, and the latest official quotation shall prevail. | | | | |

Committed to the R&D and manufacturing of electrochemical equipment.

Full PTFE Photoelectrochemical Cell Series


本系列光电解池采用全PTFE材质，具有优异的耐腐蚀性和化学稳定性，适用于各种苛刻的电解环境。其结构紧凑，操作简便，是进行光催化、光电催化等研究的理想选择。本系列光电解池具有多种规格，满足不同实验需求。其内部结构采用精密加工，确保密封性和反应效率。此外，我们还提供定制服务，可根据客户的具体要求设计制造。本系列光电解池广泛应用于环境科学、材料科学、能源科学等领域，为科研人员提供了强大的实验工具。其优异的性能和可靠的品质，赢得了广大用户的认可和好评。我们致力于为客户提供最优质的产品和服务，推动光电化学技术的发展。

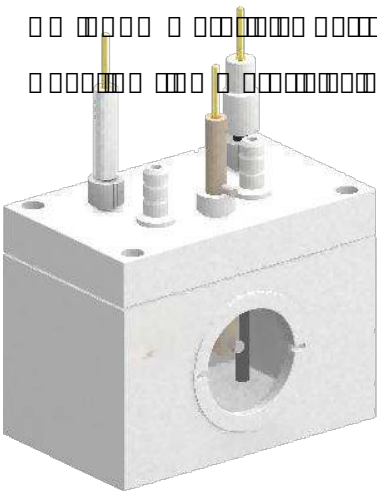


PTFE



Acrylic

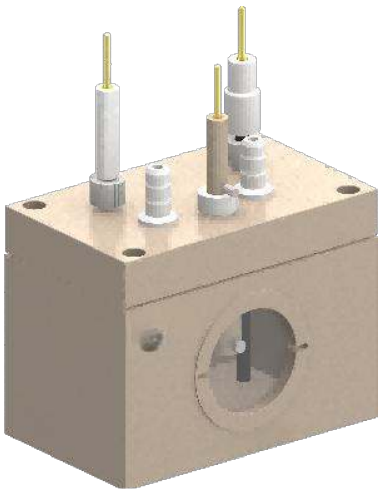

PEEK

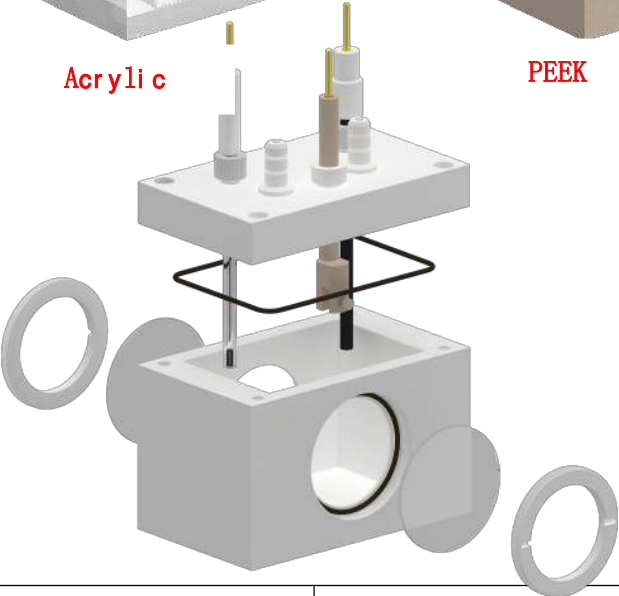

| Speci f i cat i on | Volume | Pri ce |
|--------------------|--------|--------|
| (PTFE) | 25ml | 560 |
| | 40ml | 560 |
| (PMMA) | 25ml | 560 |
| | 40ml | 560 |
| (PEEK) | 25ml | 1600 |
| | 40ml | 1600 |

Full PTFE Photoelectrochemical Cell Series

本系列光电化学池采用全PTFE材质，具有耐腐蚀、耐高温、高纯度的特点，适用于各种光电化学反应的研究。

该系列光电化学池具有以下特点：

1. 全PTFE材质：耐腐蚀性强，适用于各种强酸、强碱、有机溶剂等反应体系。

2. 高纯度：采用高纯度PTFE材料，确保反应体系的纯净度。

3. 耐高温：可在120℃以上的高温下使用，适用于高温反应体系。


4. 结构紧凑：采用模块化设计，结构紧凑，易于操作和维护。

5. 多种规格：提供25ml、40ml等多种规格，满足不同实验需求。

6. 易于清洗：采用全PTFE材质，易于清洗，避免交叉污染。

7. 适用范围广：适用于光电化学、电催化、电合成等多种研究领域。

8. 价格实惠：相比其他材质，全PTFE材质价格更为实惠。

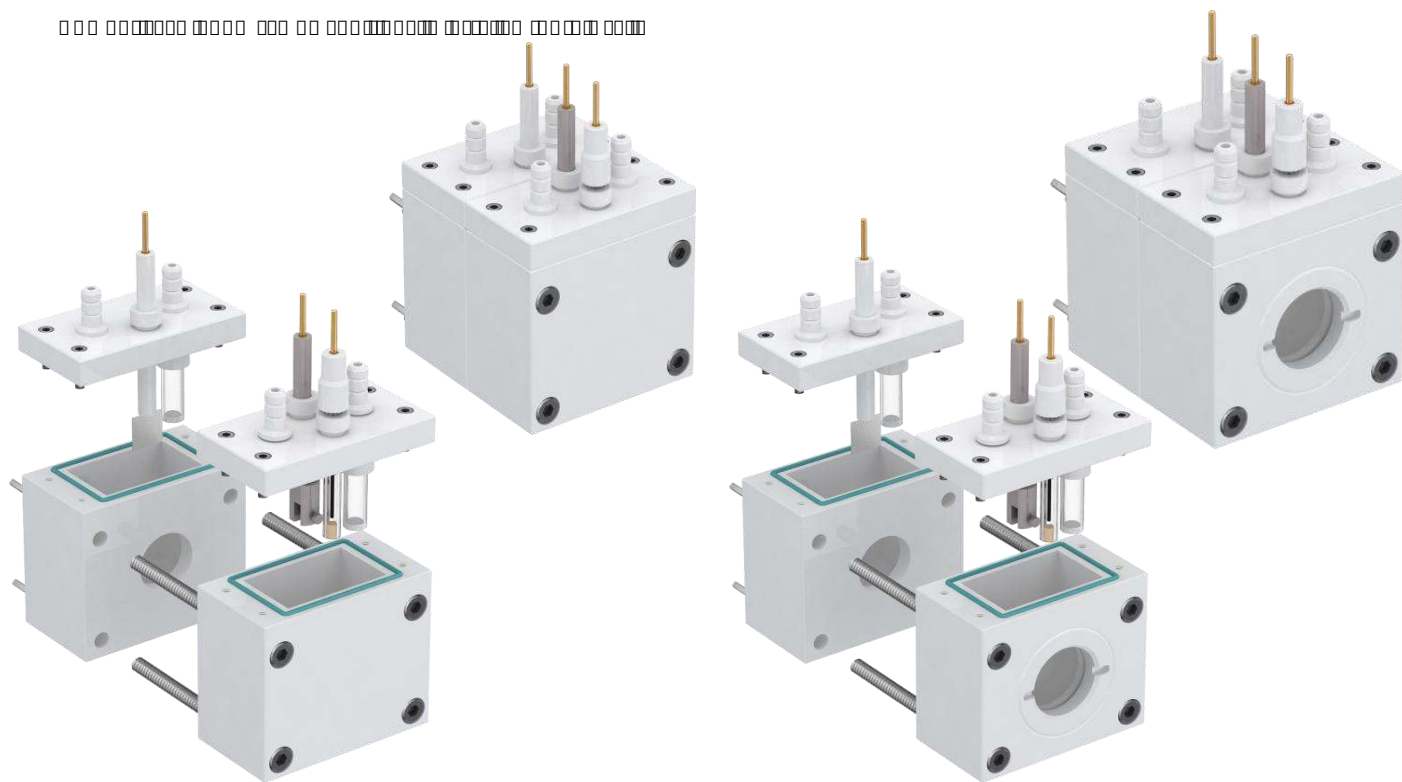


| Volume (mL) | Price |
|--|-------|
| 25ml | 500 |
| 40ml | 500 |
| 25ml（带光窗） | 630 |
| 40ml（带光窗） | 630 |
| All listed dimensions are standard sizes, custom processing is available according to requirements. Prices are subject to adjustment, and the latest official quotation shall prevail. | |

Full PTFE Photoelectrochemical Cell Series

本系列全氟化聚四氟乙烯 (PTFE) 光电化学池，采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性，适用于各种光电化学反应的研究。

产品特点

- 1. 全氟化聚四氟乙烯 (PTFE) 材料，耐腐蚀性强，使用寿命长。
- 2. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 3. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 4. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 5. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 6. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 7. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 8. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 9. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。
- 10. 采用全氟化聚四氟乙烯 (PTFE) 材料制造，具有优异的耐腐蚀性和稳定性。

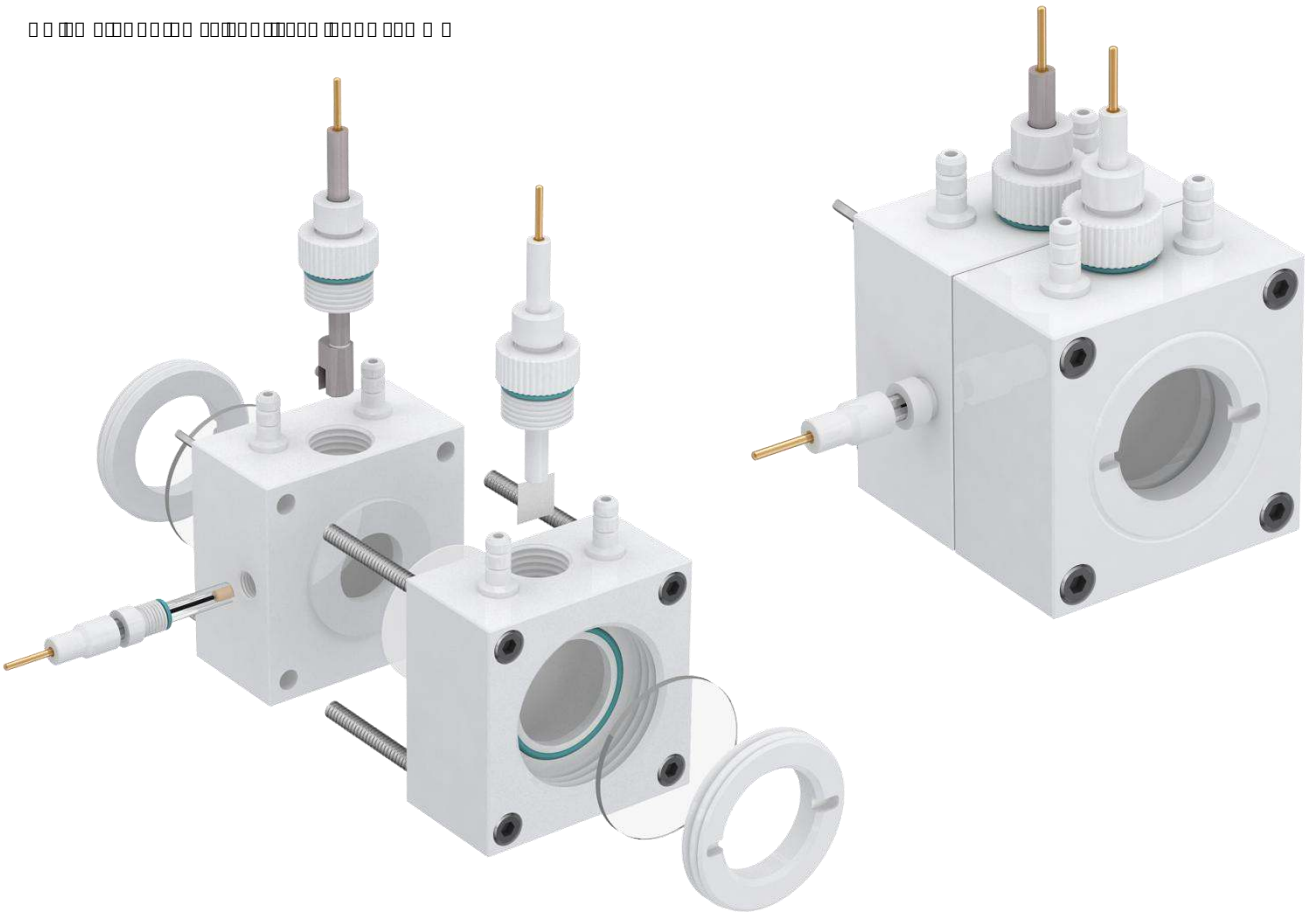


| Volume (mL) | Price |
|-------------|-------|
| 25ml | 600 |
| 40ml | 600 |

All listed dimensions are standard specifications, customized products are available in accordance with customer requirements. Prices are subject to revision, and the latest official quotation shall prevail.

Full PTFE Photoelectrochemical Cell Series


本系列全氟化氢光电化学池采用全氟化氢材料制造，具有优异的耐腐蚀性和稳定性，适用于各种光催化反应的研究。

该系列光电化学池采用全氟化氢材料制造，具有优异的耐腐蚀性和稳定性，适用于各种光催化反应的研究。其结构紧凑，操作简便，且具有良好的密封性能，能够有效防止反应液的泄漏。此外，该系列光电化学池还配备了先进的温控系统，能够精确控制反应温度，确保实验结果的准确性和可重复性。

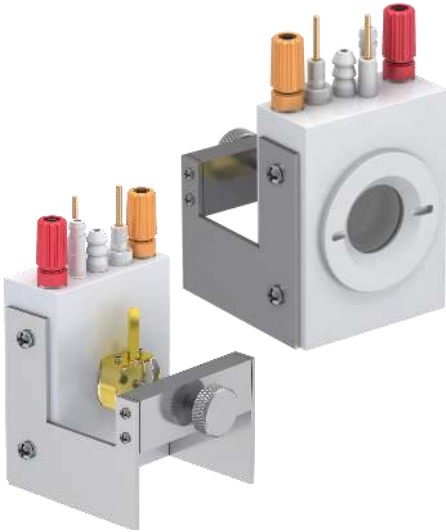

本系列全氟化氢光电化学池采用全氟化氢材料制造，具有优异的耐腐蚀性和稳定性，适用于各种光催化反应的研究。

该系列光电化学池采用全氟化氢材料制造，具有优异的耐腐蚀性和稳定性，适用于各种光催化反应的研究。其结构紧凑，操作简便，且具有良好的密封性能，能够有效防止反应液的泄漏。此外，该系列光电化学池还配备了先进的温控系统，能够精确控制反应温度，确保实验结果的准确性和可重复性。

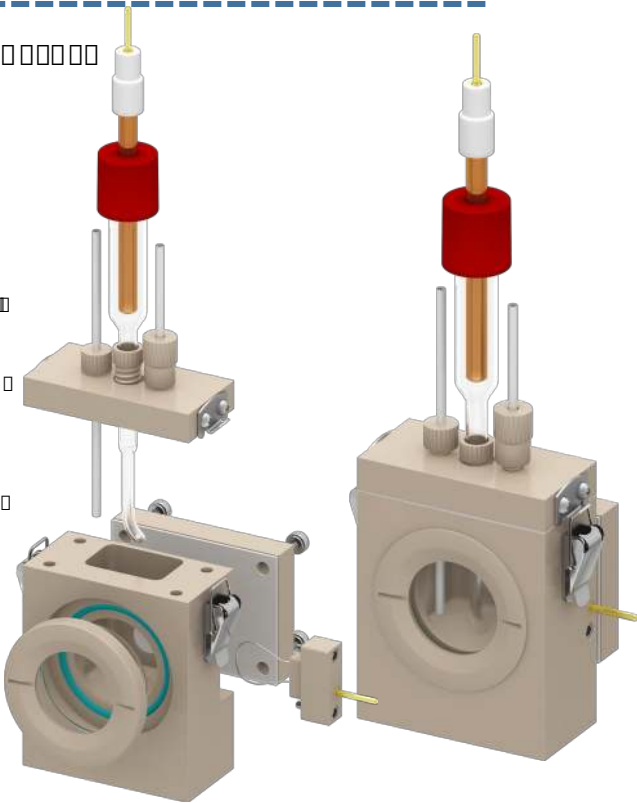

| Model | Volume (mL) | Price |
|----------|-------------|-------|
| K1300 | 5ml | 1200 |
| | 10ml | 1200 |
| K1300-25 | 5ml | 1200 |
| | 10ml | 1200 |

All listed dimensions are standard sizes, customized processing is available according to customer requirements. Prices are subject to adjustment, and the latest official quotation shall prevail.

本系列光电化学池采用全 PTFE 材质，具有耐腐蚀、易清洗、寿命长等优点。

一、产品特点

1. 全 PTFE 材质，耐腐蚀性强，适用于各种腐蚀性电解液。

2. 采用进口 PTFE 密封件，确保池体密封性，防止电解液泄漏。

3. 池体设计简洁，易于操作，维护方便。

4. 池体内部设有搅拌装置，可有效防止电极表面沉积物堆积，提高实验效率。

5. 池体底部设有排水口，方便清洗和更换电解液。

6. 池体采用进口 PTFE 材料，具有优异的机械性能，使用寿命长。

7. 池体设计符合人体工程学，操作舒适，安全可靠。


8. 池体内部设有温度控制装置，可实现恒温实验。

9. 池体采用进口 PTFE 材料，具有优异的化学稳定性，适用于各种腐蚀性电解液。

10. 池体设计符合国际标准，可与其他光电化学池兼容使用。

11. 池体采用进口 PTFE 材料，具有优异的机械性能，使用寿命长。

12. 池体设计符合人体工程学，操作舒适，安全可靠。

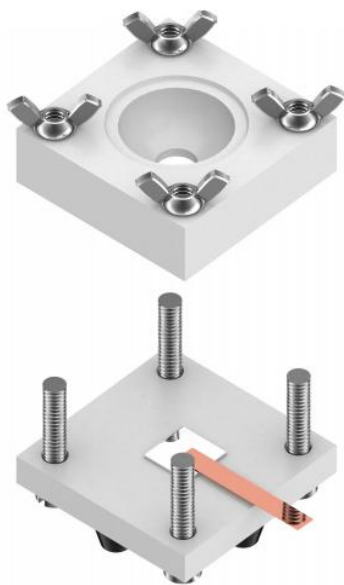

| Volume (mL) | Price |
|---|-------|
| 5ml | 230 |
| 25ml | 260 |
| 40ml | 300 |
| This price does not include the electrode holder, which can be purchased separately if required. | |
| All listed dimensions are standard sizes, customized manufacturing is available upon demand. Prices are subject to change, and the latest official quotation shall prevail. | |

Various Accessories



| Item Name | Specification | Price |
|---------------------------|-----------------------|-------|
| □□□□ | □□□□□ | 100 |
| □□□□ | □□□□2 | 120 |
| □□□□ | □□□□3 | 140 |
| □□□□□□□□□□□□□□ | 007-32 | 100 |
| □□□□□□□□□□□□□□□□□□ | 007-31 | 10 |
| Aeration Head | 007-30 | 50 |
| □□□□□□□□□□□□□□ | 14# | 80 |
| □□□□□□□□□□□□□□ | 19# | 80 |
| Liquid Seal | 14# | 80 |
| Liquid Seal | 19# | 80 |
| Sealing Screw | M10 | 10 |
| Sealing Screw | M14 | 10 |
| Luggin Capillary | 10 mm diameter | 50 |
| Fritted Glass Salt Bridge | 140mm | 50 |
| Fritted Glass Salt Bridge | 170mm | 50 |
| Fritted Glass Salt Bridge | Elbow, 10 mm diameter | 50 |

Prices are subject to change; the latest quotation shall prevail.

