



Skim Panlens Surface-mounted downlight

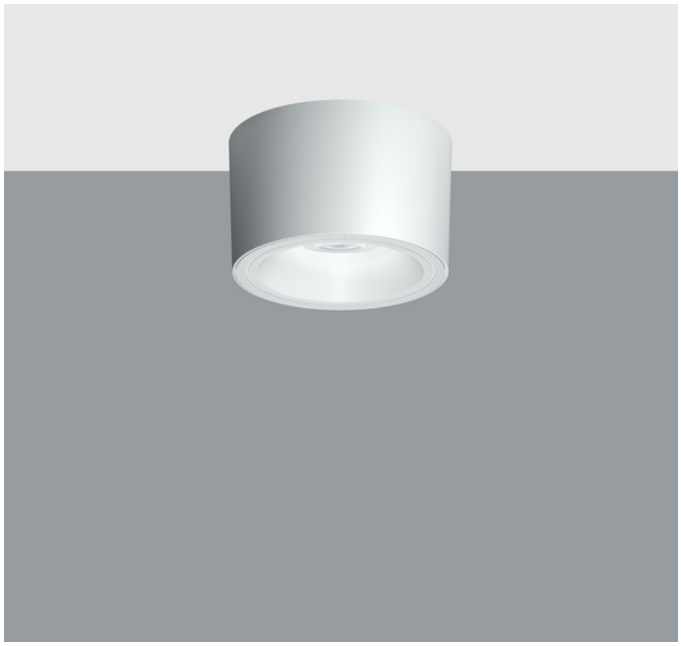

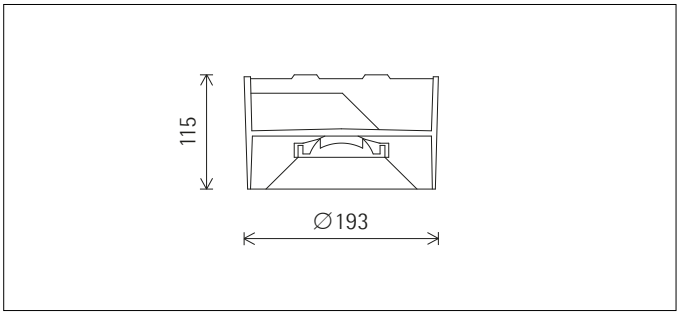






CE IP 20 UK CA



UGR
19

C3000018 White (RAL9010)
LED module: 9.5W 1747lm 3000K warm white
DALI-2
Version 1
Size 5
Lens system, wide flood

Product description
Cylinder: cast aluminium, powder-coated.
Ceiling fixture: metal.
5-pole terminal block. Through-wiring possible.
DALI control gear.
LED module: mid-power LEDs.
Lens system made from 100% recycled optical polymer.
Anti-glare cone: polymer, white (RAL9016).
Weight 2.20kg



Beam angle
C_0 61°

UGR glare evaluation
C_0 18

Technical data

Luminous flux of the luminaire	1635lm
Connected load	12.9W
Luminaire efficacy	127lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance (LED manufacturer specifications)	L90/B10 >50000h L80/B50 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	E
Standby power per control gear	0.5W
Luminaires per circuit breaker B16	50

Casambi Bluetooth controllable via accessories
Casambi DALI gateway for controlling DALI via Casambi Bluetooth

For your regional contact in the ERCO Sales network click here
www.erco.com/contact

© ERCO GmbH 2025

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical and design changes.
Edition: 11.04.2025
Current version under
www.erco.com/C3000018

Skim Panlens Surface-mounted downlight

Planning data

C3000018	LED module: 9.5W 1747lm 3000K warm white			
Number of luminaires per 100m² for	100lx	200lx	300lx	500lx
	6	12	18	30

C3000018	LED module: 9.5W 1747lm 3000K warm white			
Module (m)	1.2x1.8	1.8x1.8	1.8x2.4	2.4x2.4
Illuminance E_n (lx) for module (m)	795	530	397	298

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations
2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class B
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1775139
Model identifier: 3000068589
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards


IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources


All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols


Skim Panlens Surface-mounted downlight

Accessories






AC007007
Casambi DALI Gateway
Enables the control of DALI luminaires via Casambi Bluetooth.
Input voltage: 220-240V; 50/60Hz;.
Power consumption in standby mode: <0,5W.
DALI output (compatible). Wire cross-section: 0.2-1.5mm^2.
Protection class II with strain relief for 2x ø 2.5-5mm or 1x ø 5-9mm.
Maximum wiring length 300m with 1.5mm^2 cable cross-section.
Maximum number of controllable luminaires: 25 (depending on the number of control gear units per luminaire - cf. luminaire data sheet)
Setup of gateway via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices.
Operation only in Casambi Evolution networks. The range of the radio signal is approx. 10.0m, depending on surroundings.
Outgoing DALI control lines must be designed for mains voltage. The gateway provides 4 DALI group addresses, enabing 4 luminaire groups to be dimmed with fixed light colour. The luminaires are assigned to a DALI group address in the Casambi app.
With tunable white luminaires, up to 3 luminaire groups can be dimmed differently. The luminaires are assigned to a DALI group address in the Casambi app. The colour temperature is set simultaneously for all connected luminaires via a broadcast command. No special settings or assignments are necessary to adjust the colour temperature.
RGBW luminaires are automatically recognised by the gateway and controlled simultaneously via broadcast command; no special settings or assignments are necessary.
The controlled luminaire must have a DALI control gear.
Weight 0.06kg



86502.000
Spacer set
for surface-mounted cables.
Polymer, black.
Height 15mm.



12488.000
Pendant tube suspension
Pendant tube: metal, powder-coated white (RAL9010). ø 13mm, L 1040mm.
Canopy: polymer. ø 64mm, H 73mm.
Mounting part for attachment to a surface-mounted luminaire: zinc die-cast/steel.
Connection cable 5x 0.75mm^2, L 1400mm.
Load: 20kg.
CE UK CA

