



Lightscan Ceiling washlight

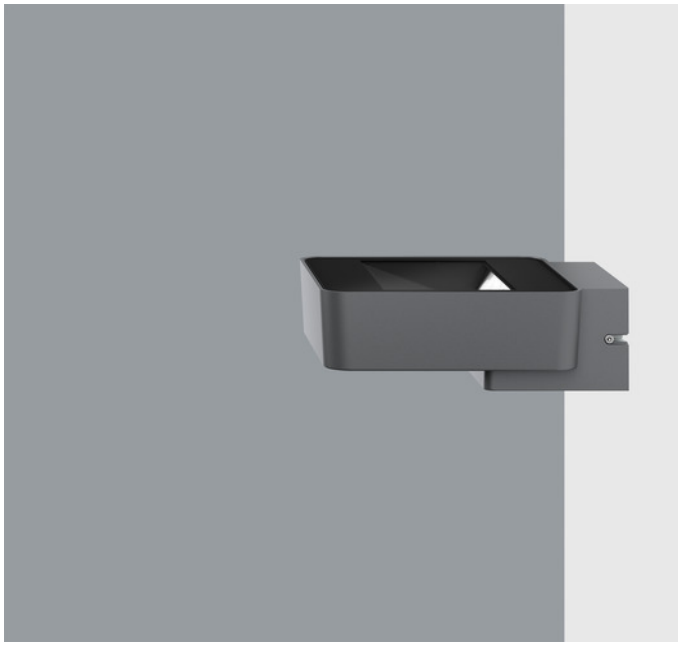

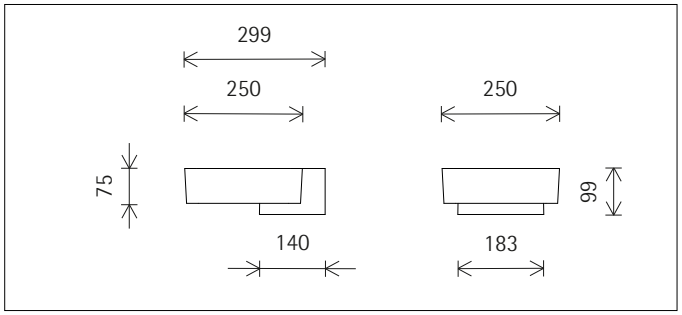







IK 10
IP 65

34356.000 Graphit m
LED module: 24.3W 3144lm 4000K neutral white
Switchable
Version 5
Spherolit lens, wide beam

Product description
Housing and wall fixture: corrosion-resistant cast aluminium, No-Rinse surface treatment. Double powder-coated. Optimised surface for reduced accumulation of dirt.
Tamper-proof screw.
2 cable entries. Through-wiring possible. 3-pole terminal block.
Control gear.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
Screw-fastened cover frame with safety glass: cast aluminium, black powder-coated.
Protection mode IP65: dust-proof and water jet-proof.
Maximum wind load area 0.07m²
Weight 4.81kg
Version with 3000K CRI 97 or 2700K, 3500K, 4000K CRI 92 available on request.





Technical data

Luminous flux of the luminaire	1550lm
Connected load	27.0W
Luminaire efficacy	57lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 82
Lumen maintenance (LED manufacturer specifications)	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	F
Standby power per control gear	--
Luminaires per circuit breaker B16	21

For your regional contact in the ERCO Sales network click here
www.erco.com/contact

© ERCO GmbH 2025

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical and design changes.
Edition: 11.04.2025
Current version under
www.erco.com/34356.000

ERCO

Lightscan Ceiling washlight

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
34356.000 (direct)	4000K CRI 82	0.71	0.65

MR Melanopic factor (of luminous radiation) a_mel,v
MDER Melanopic Daylight Efficacy Ratio [gamma]_mel,v,D65

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDI. (MEDI Melanopic Equivalent Daylight Illuminance [lx] E_v,mel,D65 [lx]).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.93	0.86	0.81	0.74	0.88	0.77	0.66	0.57	0.85	0.70	0.55	0.45

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF LMFxRSMFxLLMFxLSF
MF Maintenance Factor
LMF Luminaire Maintenance Factor
RSMF Room Surface Maintenance Factor
LLMF Lamp Lumens Maintenance Factor
LSF Lamp Survival Factor
P Room pure
C Room clean
N Room normal
D Room dirty

Data according to regulations
2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1784601
Model identifier: 3000069107
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols