



# Atrium double focus surface-mounted downlight


**with silver anti-glare cone**

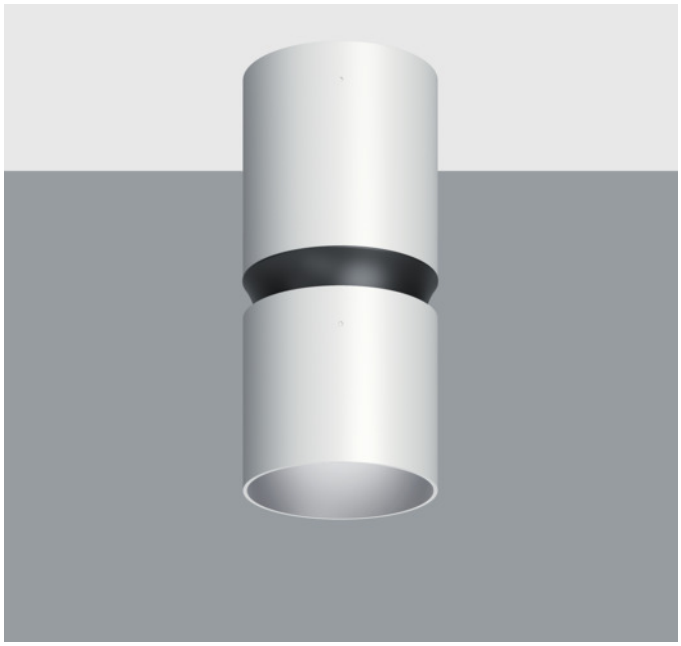

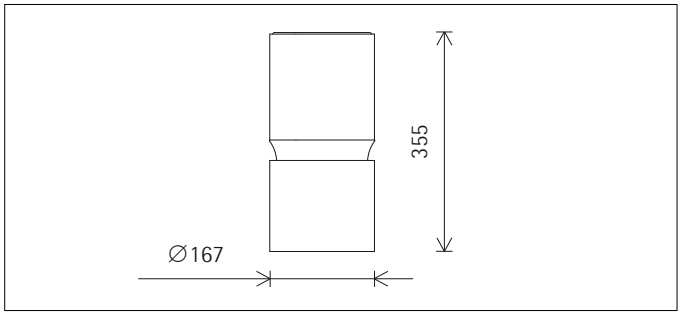











**49232.000** White (RAL9002)
LED module: 24.2W 2869lm 3000K warm white
Switchable
Version 2
Size 5
Spherolit lens, flood

**Product description**
2-piece cylinder: aluminium profile, powder-coated, internal black lacquered. Cone integrated in the centre: polymer, black.
Ceiling fixture: metal.
3-pole terminal block. Through-wiring possible.
Control gear.
LED module: high-power LEDs. Collimating lens made of optical polymer.
Cut-off angle 40°.
Weight 3.43kg




Beam angle
$C_0$ 28°

UGR glare evaluation
$C_0$ <10

**Technical data**

| | |
|---|---|
| Luminous flux of the luminaire | 2120lm |
| Connected load | 27.0W |
| Luminaire efficacy | 79lm/W |
| Colour deviation | 1.5 SDCM |
| Colour rendition index | CRI 92 |
| Lumen maintenance (LED manufacturer specifications) | L90/B10 >50000h<br>L90 >100000h |
| LED failure rate | 0.1% >50000h |
| Dimming range | -- |
| Dimming method | -- |
| TLA (Temporal Light Artefacts) | SVM ≤ 0.4; PstLM ≤ 1 |
| LMF | E |
| Standby power per control gear | -- |
| Luminaires per circuit breaker B16 | 44 |

For your regional contact in the ERCO Sales network click here
www.erco.com/contact

© ERCO GmbH 2025

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical and design changes.
Edition: 11.04.2025
Current version under
www.erco.com/49232.000

# Atrium double focus surface-mounted downlight

## Planning data

| | | |
|---|---|---|
| 49232.000 | LED module: 24.2W 2869lm 3000K warm white | |
| Connected load | P: | 27.0 W |
| Connected load per 100lx | P*: | 1.0 W/m² |
| Number of luminaires per 100lx | n*: | 4.0 1/100m² |

| | | | | |
|---|---|---|---|---|
| 49232.000 | LED module: 24.2W 2869lm 3000K warm white | | | |
| Number of luminaires per 100m² for | 100lx | 200lx | 300lx | 500lx |
| | 5 | 9 | 14 | 23 |

| | | | | |
|---|---|---|---|---|
| 49232.000 | LED module: 24.2W 2869lm 3000K warm white | | | |
| Module (m) | 1.2x1.8 | 1.8x1.8 | 1.8x2.4 | 2.4x2.4 |
| Illuminance $E_n$ (lx) for module (m) | 1031 | 687 | 515 | 386 |

**Melanopic light effect**

| Art. no. | Spectrum | MR | MDER |
|---|---|---|---|
| 49232.000 (direct) | 3000K CRI 92 | 0.53 | 0.48 |

MR Melanopic factor (of luminous radiation) a_mel,v
MDER Melanopic Daylight Efficacy Ratio [gamma]_mel,v,D65

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDI. (MEDI Melanopic Equivalent Daylight Illuminance [lx] E_v,mel,D65 [lx]).

**Extract from the Environmental Product Declaration (EPD)**
The entire EPD can be found at: www.erco.com/49232.000

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

| Lighting output | Manufacturing | Distribution | Installation | Use | EoL | Benefits and loads |
|---|---|---|---|---|---|---|
| 1909 | 0.891 | 0.888 | 0.976 | 0.931 | 0.863 | 0.891 |

Frequently used EPD data that have already been converted for this article number.

| Parameter | Unit | A1-A3 | A4 | A5 | B6 | C1 | C2 | C3 | C4 | D | Total, excl. D |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Results per functional unit | | | | | | | | | | | |
| GWP | kg CO2-eq. | 2.33E01 | 7.24E-01 | 1.13E00 | 7.46E02 | 0.00E00 | 2.28E-02 | 7.03E-01 | 1.55E-02 | -6.56E00 | 7.72E02 |
| GWP-biogenic | kg CO2-eq. | -1.01E00 | 0.00E00 | 1.11E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 1.00E-01 |
| Results per declared unit | | | | | | | | | | | |
| GWP | kg CO2-eq. | 3.84E01 | 1.19E00 | 1.85E00 | 1.23E03 | 0.00E00 | 3.75E-02 | 1.16E00 | 2.55E-02 | -1.08E01 | 1.27E03 |
| GWP-biogenic | kg CO2-eq. | -1.67E00 | 0.00E00 | 1.83E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 0.00E00 | 1.60E-01 |

A1-A3 Manufacturing
A4 Distribution
A5 Installation
B6 Use
C1-C4 End of Life
D Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix. You will find the ERCO EPD Help under Downloads/General planning data.

| Cleaning (a) | 1 | | | | 2 | | | | 3 | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ambient conditions | P | C | N | D | P | C | N | D | P | C | N | D |
| LMF | 0.96 | 0.94 | 0.90 | 0.86 | 0.93 | 0.91 | 0.86 | 0.81 | 0.92 | 0.90 | 0.84 | 0.79 |

| Hours of operation (h) | 1000 | 5000 | 10000 | 20000 | 30000 | 40000 | 50000 |
|---|---|---|---|---|---|---|---|
| LLMF | 1.00 | 0.99 | 0.98 | 0.96 | 0.94 | 0.92 | 0.90 |
| LSF | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

MF LMFxRSMFxLLMFxLSF
MF Maintenance Factor
LMF Luminaire Maintenance Factor
RSMF Room Surface Maintenance Factor
LLMF Lamp Lumens Maintenance Factor
LSF Lamp Survival Factor
P Room pure
C Room clean
N Room normal
D Room dirty

# Atrium double focus surface-mounted downlight

## Planning data

**Data according to regulations**
2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1784428
Model identifier: 3000068218
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

**Technical data in accordance with international norms and standards**

| | |
|---|---|
| IEC 60598 | Luminaires – Part 1+2: general requirements, specific requirements and tests |
| IEC 62031 | LED modules for general lighting – safety requirements |
| IEC 62471 | Photobiological safety of lamps and lamp systems |
| EN13032-4 | Light and lighting – measurement and representation of photometric data |
| CIE 13 | Method of measuring and specifying colour rendering properties of light sources |

All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols