


Castor Bollard luminaire

Floor washlight



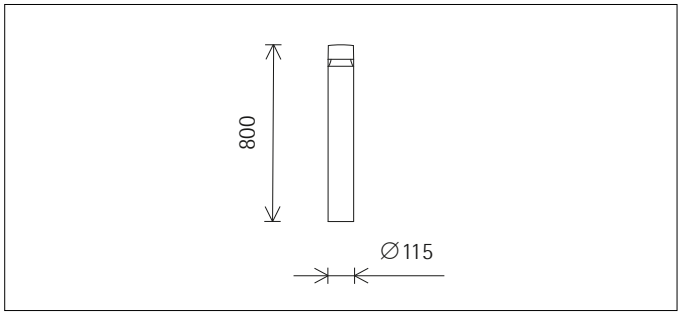







CE EAC IK 10
IP 65 UKCA

33265.000 Graphit m
LED module: 8.1W 1048lm 4000K neutral white
Switchable
Version 3
Wide beam

Product description
For mounting on accessories.
Bollard: corrosion-resistant aluminium profile, No-Rinse surface treatment. Double powder-coated. Optimised surface for reduced accumulation of dirt.
Upper cover and base plate: corrosion-resistant cast aluminium, No-Rinse surface treatment. Double powder-coated. Base plate for mounting on ground socket, concrete anchor or mounting plate.
2 cable entries. Through-wiring possible. 2 terminals.
Control gear.
LED module: high-power LEDs.
180° light guidance ring made of optical polymer.
Anti-glare cone: corrosion-resistant cast aluminium, No-Rinse surface treatment. double powder-coated and black lacquered.
Glare-free above the light aperture.
Mounting accessories to be ordered separately.
Protection mode IP65: dust-proof and water jet-proof.
Protection Class II
Housing temperature 56°C
Maximum wind load area 0.092m²
Weight 4.55kg
Version with 3000K CRI 97 or 2700K, 3500K, 4000K CRI 92 available on request.





Technical data

Luminous flux of the luminaire	200lm
Connected load	10.0W
Luminaire efficacy	20lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 82
Lumen maintenance (LED manufacturer specifications)	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	E
Standby power per control gear	--
Luminaires per circuit breaker B16	50
Temperature on the light aperture	37°C

For your regional contact in the ERCO Sales network click here
www.erco.com/contact

© ERCO GmbH 2025

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical and design changes.
Edition: 11.04.2025
Current version under
www.erco.com/33265.000

ERCO

Castor Bollard luminaire

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
33265.000 (direct)	4000K CRI 82	0.71	0.65

MR Melanopic factor (of luminous radiation) a_mel,v
MDER Melanopic Daylight Efficacy Ratio [gamma]_mel,v,D65

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDI. (MEDI Melanopic Equivalent Daylight Illuminance [lx] E_v,mel,D65 [lx]).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF LMFxRSMFxLLMFxLSF
MF Maintenance Factor
LMF Luminaire Maintenance Factor
RSMF Room Surface Maintenance Factor
LLMF Lamp Lumens Maintenance Factor
LSF Lamp Survival Factor
P Room pure
C Room clean
N Room normal
D Room dirty

Data according to regulations
2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class D
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1766019
Model identifier: 3000069100
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources


All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols


ERCO

Castor Bollard luminaire

Accessories





33975.000
Ground socket
Metal, hot-dip galvanised.
Weight 2.10kg





33979.000
Concrete anchor
Mounting plate with threaded bar and fixing nuts M6. Individual parts to be assembled on-site.
Weight 0.25kg





33982.000
Mounting plate
Corrosion-resistant cast aluminium, No-Rinse surface treatment. Graphit m, double powder-coated.
Weight 1.70kg

