
Laser Blade L

Design iGuzzini **iGuzzini**

Last information update: April 2025

Product configuration: P960.01
P960.01: Frame recessed luminaire - Warm White LED - Wall Washer - DALI - White




Product code
P960.01: Frame recessed luminaire - Warm White LED - Wall Washer - DALI - White

Technical description
Recessed luminaire with wall washer fixed optic for warm white LED with high colour rendering index. Passive cooling system. Luminaire body with die-cast radiant aluminium surface; version with perimeter stop frame. Special assymetrical optical systems for defined light distribution on the wall with no shadow areas. Reflector - flow recuperator in superpure aluminium, diffuser - PMMA refractor, thermoplastic containment structure. Supplied with DALI dimmable power supply unit connected to the luminaire.

Installation
Recessed with anti-fall steel wire springs - 1 mm minimum thickness of false ceiling - recess opening 75 x 75 mm. To ensure proper lighting of walls, check distances and centre to centre distances on the instructions sheet.

Colour
White (01)

Weight (Kg)
0.5



Mounting
wall recessed|ceiling recessed

Wiring
Quick-fit power supply connection to terminal block - Digital electronic wiring enables dimming with DALI or TOUCH DIM systems.


Complies with EN60598-1 and pertinent regulations

IP20 IP43 On the visible part of the product once installed

Technical data

lm system:	655	Colour temperature [K]:	3000
W system:	10.6	MacAdam Step:	2
lm source:	1150	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	8.3	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	61.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	57	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

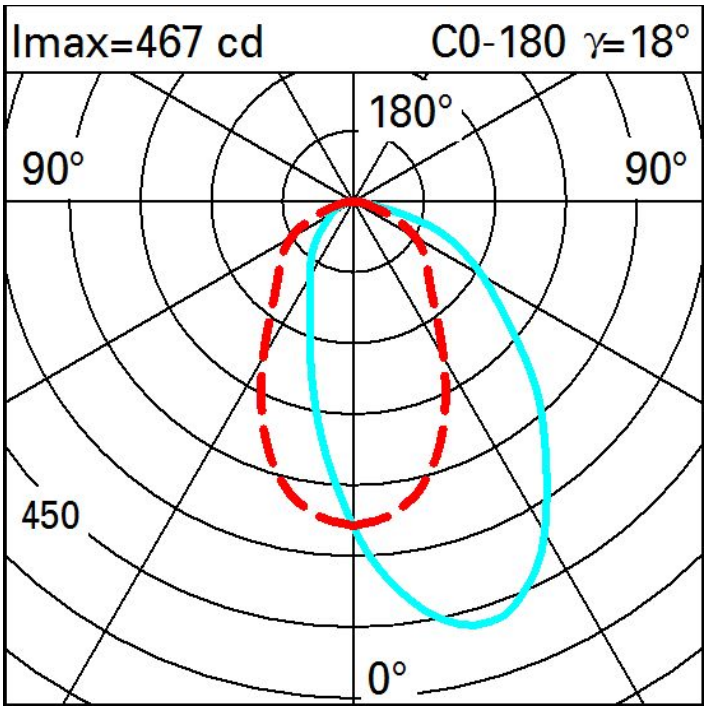

Illuminances

