




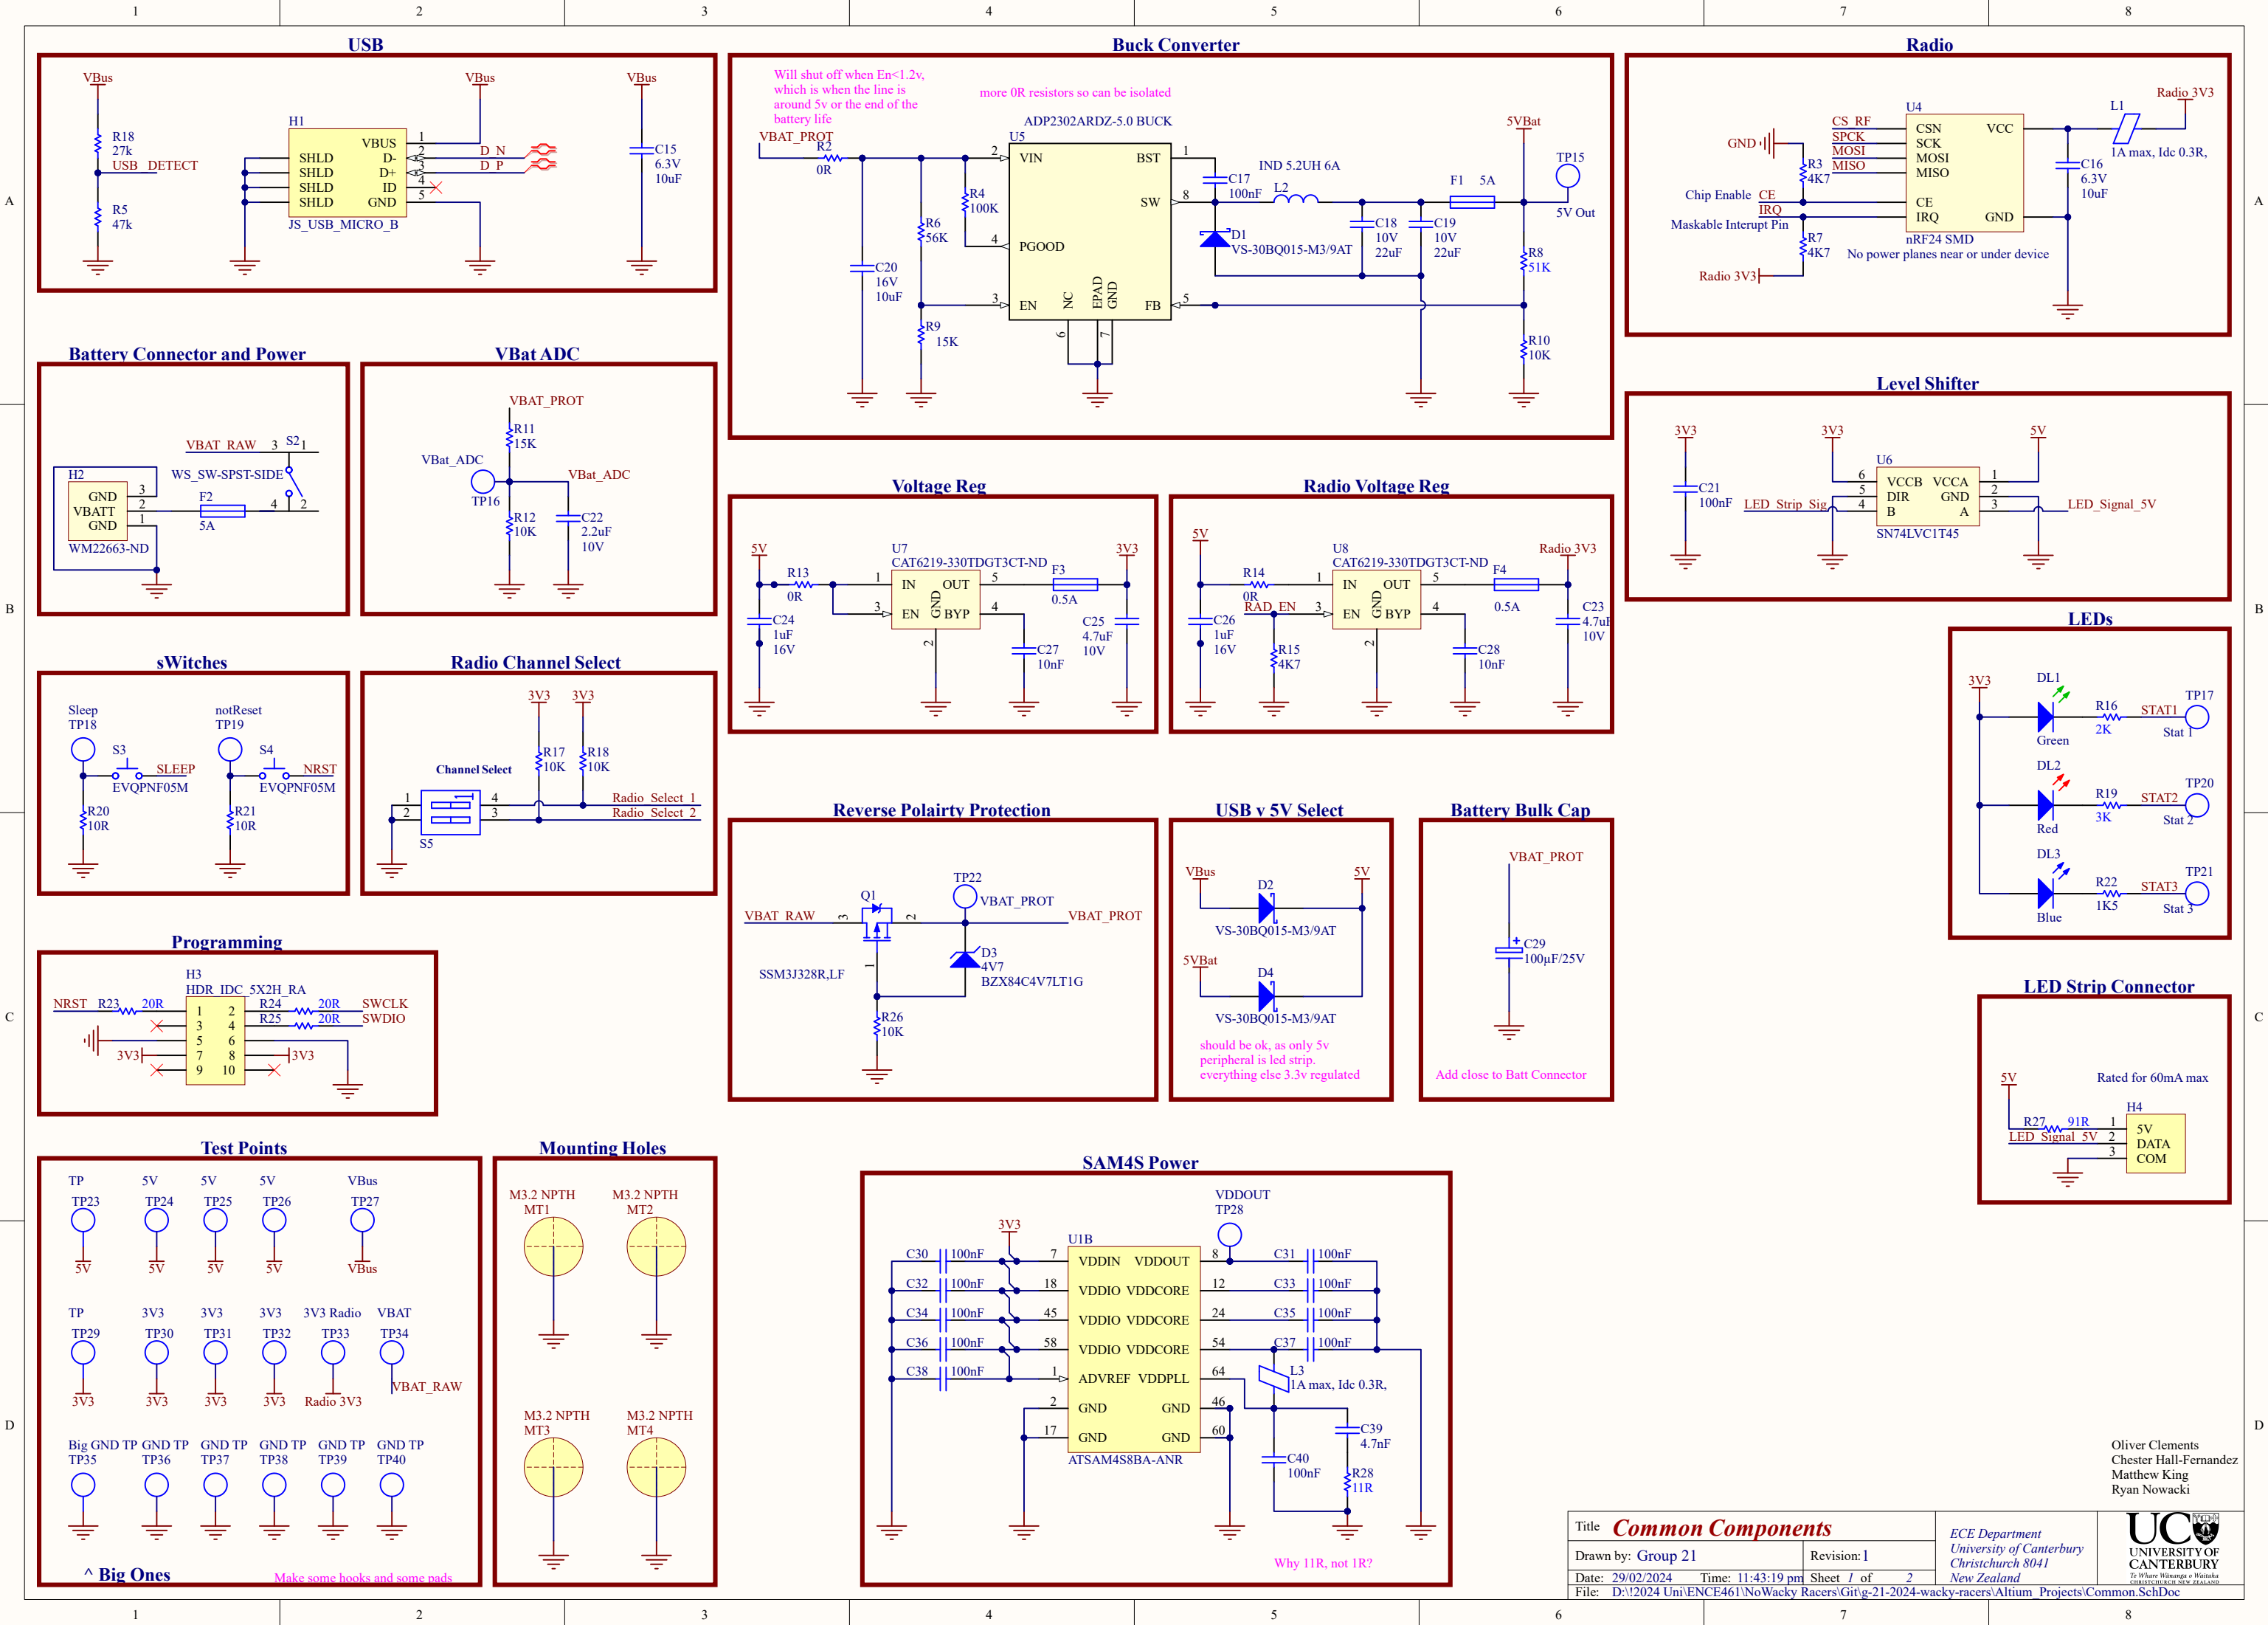


Joystick

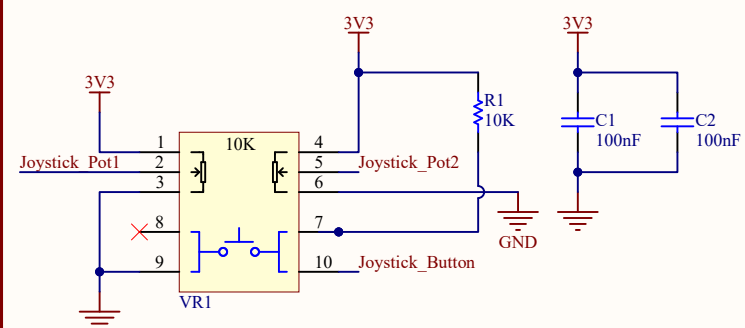


I2C Pullups



Buzzer

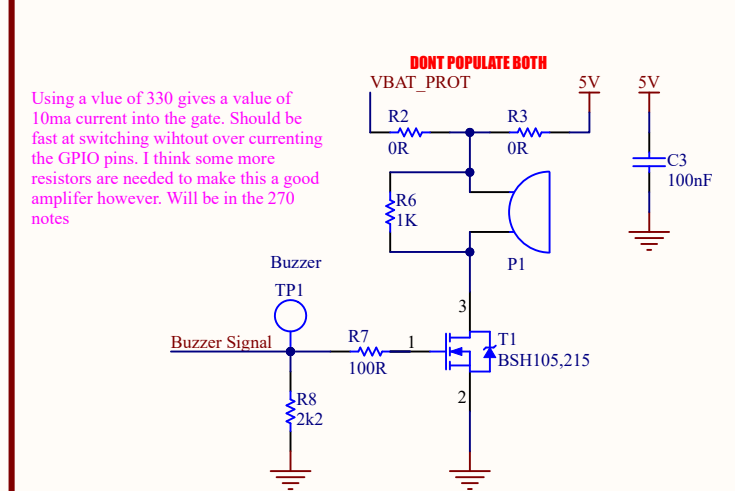


Input Select

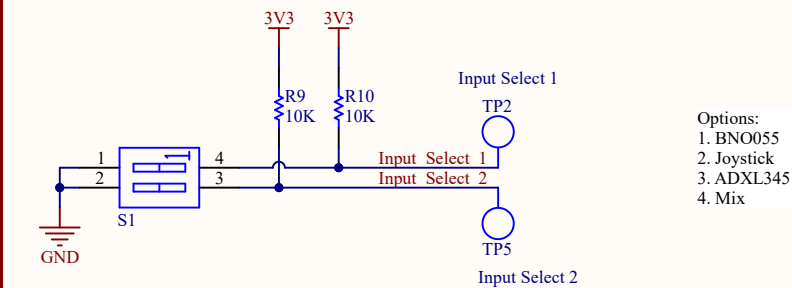


Options:
1. BNO055
2. Joystick
3. ADXL345
4. Mix


SAM4S GPIO

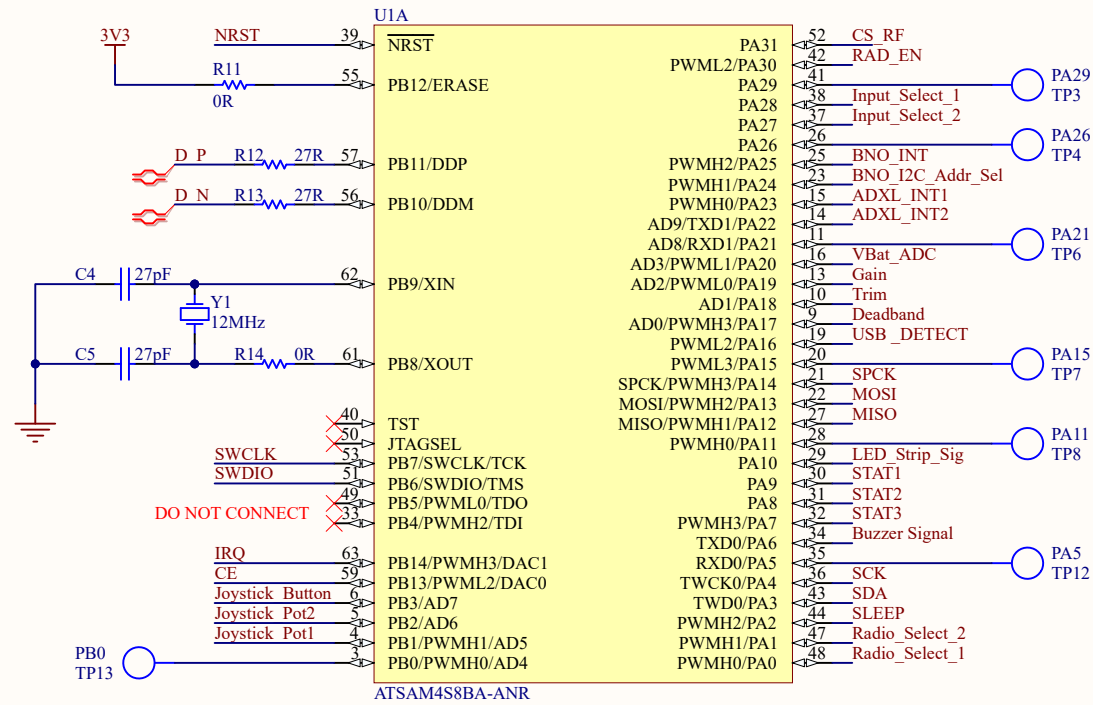

Control Adjustments

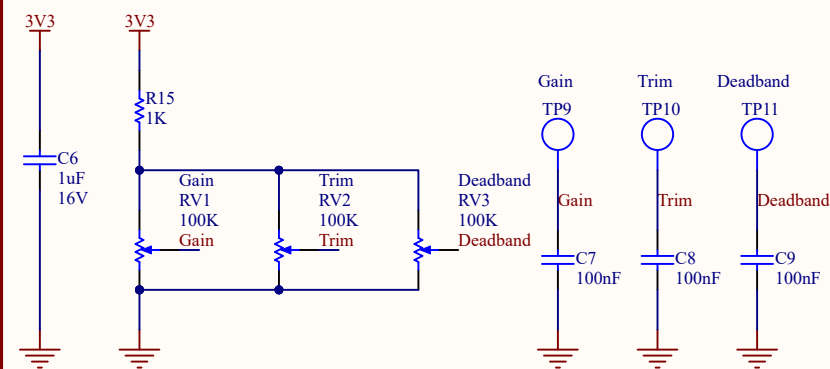


BNO055

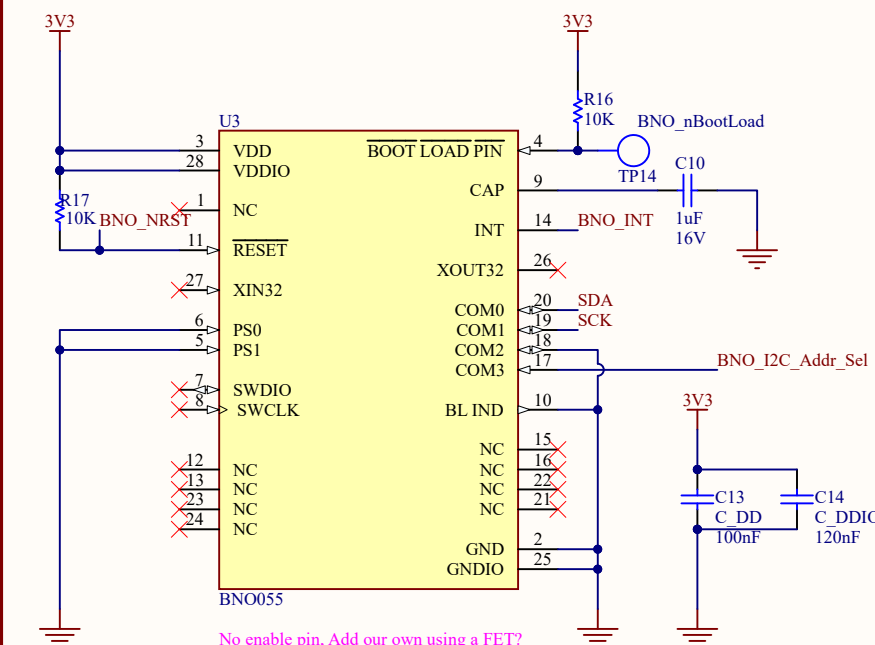

No enable pin, Add our own using a FET?

Should we use an external clock? Apparently helps

ADXL345

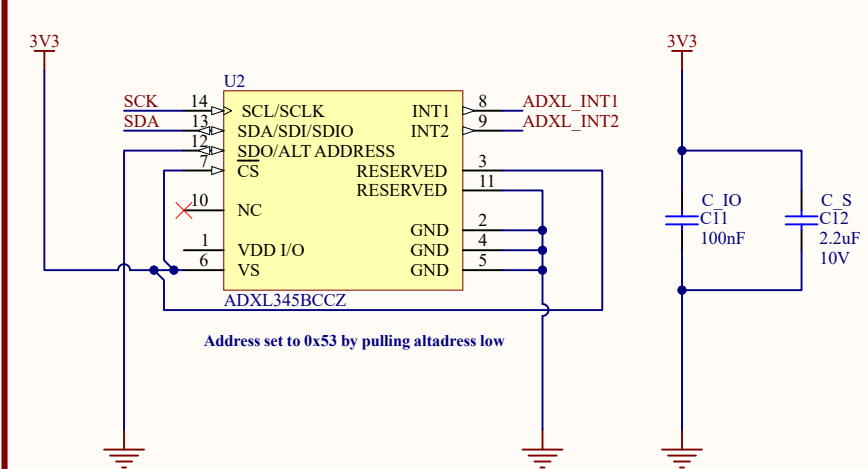

Address set to 0x53 by pulling altaddress low