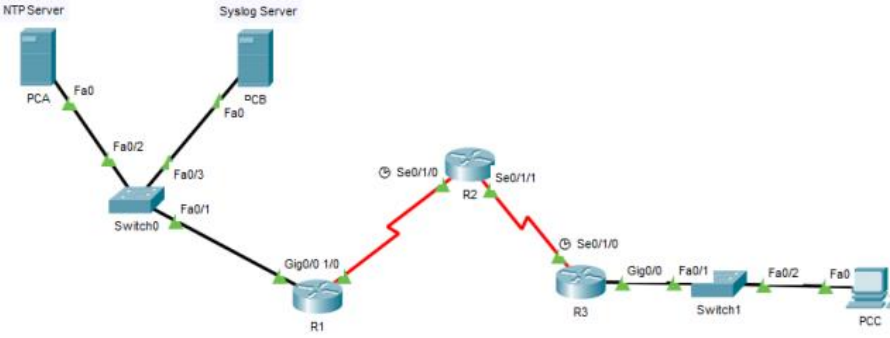


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1.	Create the following topology and - Configure OSPF MD5 authentication. - Configure NTP and configure routers to log messages to the Syslog Server  Addressing Table<table><tr><th>Device</th><th>Interface</th><th>IP Address</th><th>Subnet Mask</th><th>Default Gateway</th></tr><tr><td rowspan="2">R1</td><td>gig0/0</td><td>192.168.1.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.1.1.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td rowspan="2">R2</td><td>se0/1/0</td><td>10.1.1.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>se0/1/1</td><td>10.2.2.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td rowspan="2">R3</td><td>gig0/0</td><td>192.168.3.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.2.2.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>PC-A</td><td>NIC</td><td>192.168.1.5</td><td>255.255.255.0</td><td>192.168.1.1</td></tr><tr><td>PC-B</td><td>NIC</td><td>192.168.1.6</td><td>255.255.255.0</td><td>192.168.1.1</td></tr><tr><td>PC-C</td><td>NIC</td><td>192.168.3.5</td><td>255.255.255.0</td><td>192.168.3.1</td></tr></table>	Device	Interface	IP Address	Subnet Mask	Default Gateway	R1	gig0/0	192.168.1.1	255.255.255.0	N/A	se0/1/0	10.1.1.1	255.255.255.252	N/A	R2	se0/1/0	10.1.1.2	255.255.255.252	N/A	se0/1/1	10.2.2.2	255.255.255.252	N/A	R3	gig0/0	192.168.3.1	255.255.255.0	N/A	se0/1/0	10.2.2.1	255.255.255.252	N/A	PC-A	NIC	192.168.1.5	255.255.255.0	192.168.1.1	PC-B	NIC	192.168.1.6	255.255.255.0	192.168.1.1	PC-C	NIC	192.168.3.5	255.255.255.0	192.168.3.1	40
Device	Interface	IP Address	Subnet Mask	Default Gateway																																													
R1	gig0/0	192.168.1.1	255.255.255.0	N/A																																													
	se0/1/0	10.1.1.1	255.255.255.252	N/A																																													
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A																																													
	se0/1/1	10.2.2.2	255.255.255.252	N/A																																													
R3	gig0/0	192.168.3.1	255.255.255.0	N/A																																													
	se0/1/0	10.2.2.1	255.255.255.252	N/A																																													
PC-A	NIC	192.168.1.5	255.255.255.0	192.168.1.1																																													
PC-B	NIC	192.168.1.6	255.255.255.0	192.168.1.1																																													
PC-C	NIC	192.168.3.5	255.255.255.0	192.168.3.1																																													
2.	Viva	5																																															
3.	Journal	5																																															


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Configure an ACL that will permit FTP and HTTP access on R1.
 - Verify the ACL implementation. PC1 (Only FTP). PC2(Only HTTP)

40

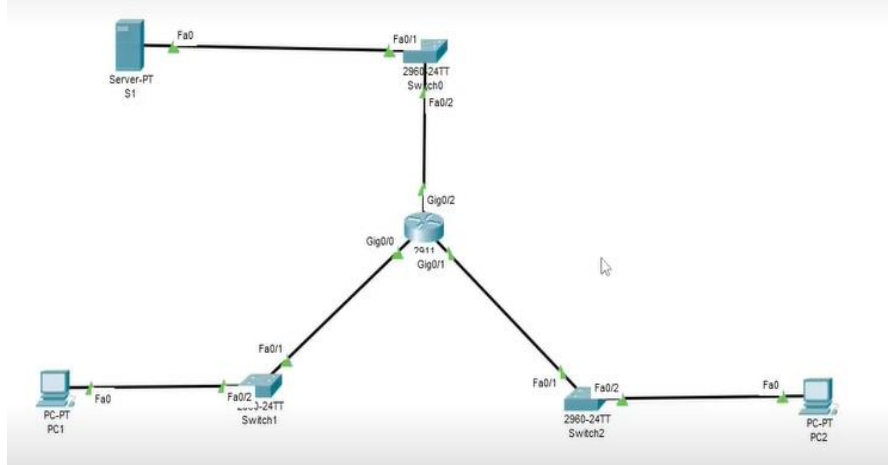

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	172.22.34.65	255.255.255.224	N/A
	gig0/1	172.22.34.97	255.255.255.240	N/A
	gig0/2	172.22.34.1	255.255.255.192	N/A
Server	NIC	172.22.34.62	255.255.255.192	172.22.34.1
PC1	NIC	172.22.34.66	255.255.255.224	172.22.34.65
PC2	NIC	172.22.34.98	255.255.255.240	172.22.34.97

2. Viva 5
3. Journal 5


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Configure basic ASA settings and interface security levels using CLI
 - Configure routing, address translation, and inspection policy using CLI.
 - Test connectivity to the ASA.

40

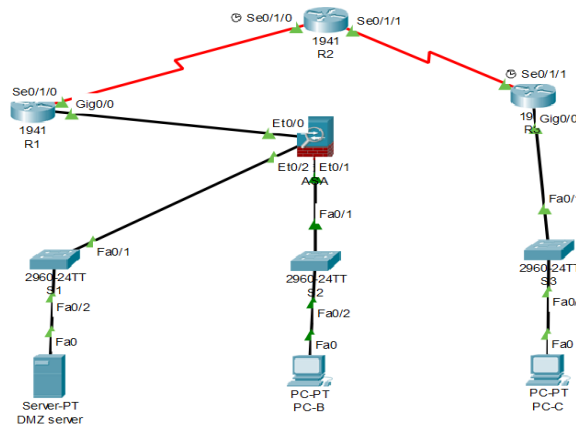

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	209.165.200.225	255.255.255.248	N/A
	se0/1/0	10.1.1.1	255.255.255.252	N/A
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A
	se0/1/1	10.2.2.2	255.255.255.252	N/A
R3	gig0/0	172.16.3.1	255.255.255.0	N/A
	se0/1/0	10.2.2.1	255.255.255.252	N/A
ASA	VLAN 1 (Et0/1)	192.168.1.1	255.255.255.0	N/A
ASA	VLAN 2 (Et0/0)	209.165.200.226	255.255.255.248	N/A
ASA	VLAN 3 (Et0/2)	192.168.2.1	255.255.255.0	N/A
DMZ Server	NIC	192.168.2.3	255.255.255.0	192.168.2.1
PC-B	NIC	192.168.1.3	255.255.255.0	192.168.1.1
PC-C	NIC	172.168.3.3	255.255.255.0	172.168.3.1

2. Viva 5
3. Journal 5


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Connect a new redundant link between SW-1 and SW-2.
 - Enable trunking and configure security on the trunk link.
 - Create a new management VLAN (VLAN 20) and attach a management PC to that VLAN.
 - Verify connectivity of the management PC to all switches.
 - Implement an ACL to prevent outside users from accessing the management VLAN

40

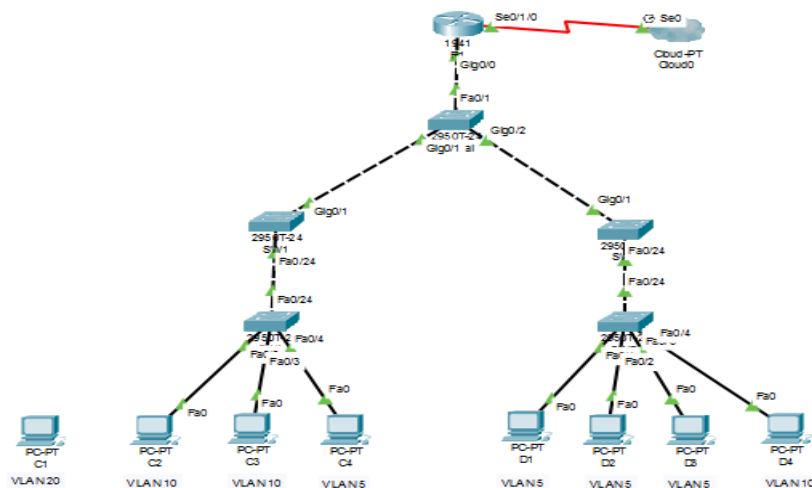

Addressing Table


Devices	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/1			
	se0/0/0	209.165.200.1	255.255.255.0	N/A
C2	NIC	192.168.10.1	255.255.255.0	192.168.10.100
C3	NIC	192.168.10.2	255.255.255.0	192.168.10.100
C4	NIC	192.168.5.1	255.255.255.0	192.168.5.100
D1	NIC	192.168.5.2	255.255.255.0	192.168.5.100
D2	NIC	192.168.5.3	255.255.255.0	192.168.5.100
D3	NIC	192.168.5.4	255.255.255.0	192.168.5.100
D4	NIC	192.168.10.3	255.255.255.0	192.168.10.100

2. Viva 5
3. Journal 5

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

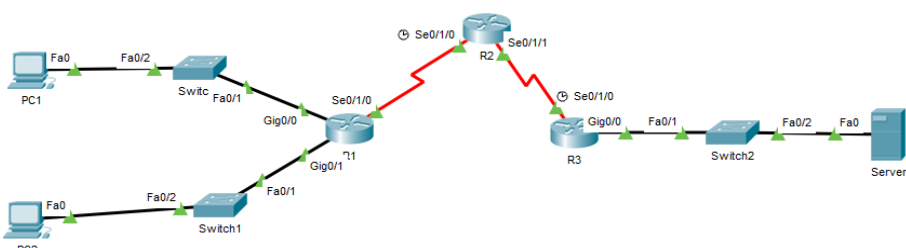1.	Create the following topology using static routing and Configure, apply and verify an ACL that will block ICMP access on R3  Addressing Table <table><thead><tr><th>Device</th><th>Interface</th><th>IPv6 Address/Prefix</th><th>Default Gateway</th></tr></thead><tbody><tr><td>PC1</td><td>NIC</td><td>2001:DB8:1:10::10/64</td><td>FE80::1</td></tr><tr><td>PC2</td><td>NIC</td><td>2001:DB8:1:11::11/64</td><td>FE80::1</td></tr><tr><td rowspan="3">R1</td><td>gig0/0</td><td>2001:DB8:1:10::1/64</td><td>FE80::1</td></tr><tr><td>gig0/1</td><td>2001:DB8:1:11::1/64</td><td>FE80::1</td></tr><tr><td>se0/1/0</td><td>2001:DB8:1:1::1/64</td><td>FE80::1</td></tr><tr><td rowspan="2">R2</td><td>se0/1/0</td><td>2001:DB8:1:1::2/64</td><td>FE80::2</td></tr><tr><td>se0/1/1</td><td>2001:DB8:1:2::2/64</td><td>FE80::2</td></tr><tr><td rowspan="2">R3</td><td>gig0/0</td><td>2001:DB8:1:30::1/64</td><td>FE80::3</td></tr><tr><td>se0/1/0</td><td>2001:DB8:1:2::1/64</td><td>FE80::3</td></tr><tr><td>Server</td><td>NIC</td><td>2001:DB8:1:30::30/64</td><td>FE80::3</td></tr></tbody></table> <td>40</td>	Device	Interface	IPv6 Address/Prefix	Default Gateway	PC1	NIC	2001:DB8:1:10::10/64	FE80::1	PC2	NIC	2001:DB8:1:11::11/64	FE80::1	R1	gig0/0	2001:DB8:1:10::1/64	FE80::1	gig0/1	2001:DB8:1:11::1/64	FE80::1	se0/1/0	2001:DB8:1:1::1/64	FE80::1	R2	se0/1/0	2001:DB8:1:1::2/64	FE80::2	se0/1/1	2001:DB8:1:2::2/64	FE80::2	R3	gig0/0	2001:DB8:1:30::1/64	FE80::3	se0/1/0	2001:DB8:1:2::1/64	FE80::3	Server	NIC	2001:DB8:1:30::30/64	FE80::3	40
Device	Interface	IPv6 Address/Prefix	Default Gateway																																							
PC1	NIC	2001:DB8:1:10::10/64	FE80::1																																							
PC2	NIC	2001:DB8:1:11::11/64	FE80::1																																							
R1	gig0/0	2001:DB8:1:10::1/64	FE80::1																																							
	gig0/1	2001:DB8:1:11::1/64	FE80::1																																							
	se0/1/0	2001:DB8:1:1::1/64	FE80::1																																							
R2	se0/1/0	2001:DB8:1:1::2/64	FE80::2																																							
	se0/1/1	2001:DB8:1:2::2/64	FE80::2																																							
R3	gig0/0	2001:DB8:1:30::1/64	FE80::3																																							
	se0/1/0	2001:DB8:1:2::1/64	FE80::3																																							
Server	NIC	2001:DB8:1:30::30/64	FE80::3																																							
2.	Viva	5																																								
3.	Journal	5																																								

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50


1.

Create the following topology and

Configure OSPF MD5 authentication

Configure a local user account on R1 and configure authenticate on the console and vty lines using local AAA.

Verify local AAA authentication from the R1 console and the PC0 client and PC1 Client.

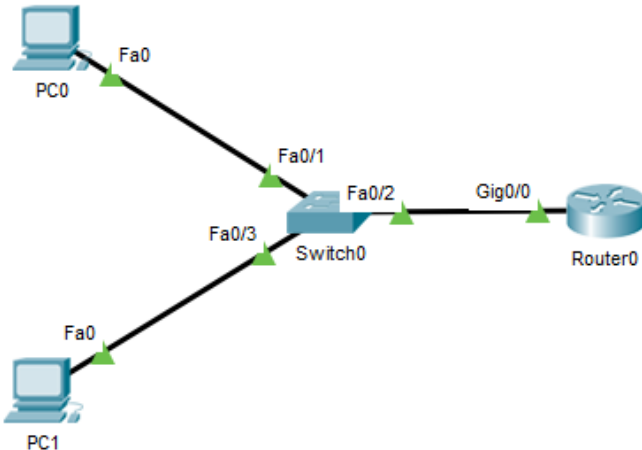

```

graph LR
    PC0[PC0] --- Fa0_1[Fa0/1] --- Switch0[Switch0]
    PC1[PC1] --- Fa0_3[Fa0/3] --- Switch0
    Switch0 --- Fa0_2[Fa0/2] --- Router0[Router0]
    style Fa0_1 fill:none,stroke:none
    style Fa0_3 fill:none,stroke:none
    style Fa0_2 fill:none,stroke:none

```

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	192.168.1.1	255.255.255.0	N/A
PC0	NIC	192.168.1.2	255.255.255.0	192.168.1.1
PC1	NIC	192.168.1.3	255.255.255.0	192.168.1.1

2.

Viva

5

3.

Journal

5

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____


Max. Marks: 50

1.

Create the following topology and

- Configure and verify R1 to support a site-to-site IPsec VPN with R3.

40

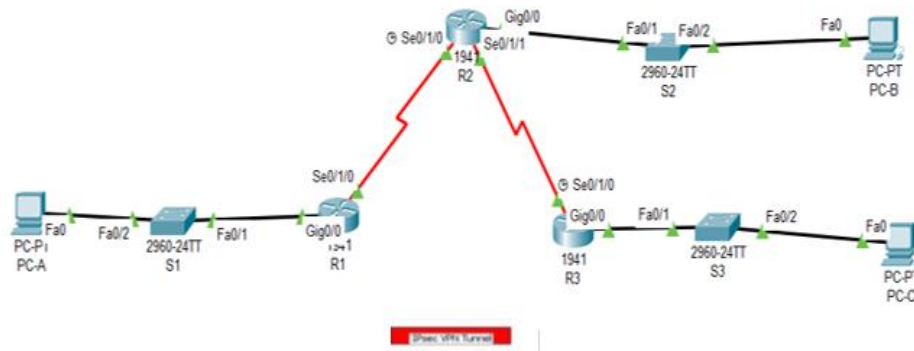

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	192.168.1.1	255.255.255.0	N/A
	se0/1/0	10.1.1.2	255.255.255.252	N/A
R2	gig0/0	192.168.2.1	255.255.255.0	N/A
	se0/1/0	10.1.1.1	255.255.255.252	N/A
	se0/1/1	10.2.2.1	255.255.255.252	N/A
R3	gig0/0	192.168.2.1	255.255.255.0	N/A
	se0/1/0	10.2.2.2	255.255.255.252	N/A
PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1
PC-B	NIC	192.168.2.3	255.255.255.0	192.168.2.1
PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1

2.

Viva

5

3.

Journal

5


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology with OSPF routing and
- Configure NTP.
 - Configure Routers to log messages to the syslog server.
 - Configure R3 to support SSH connections

40

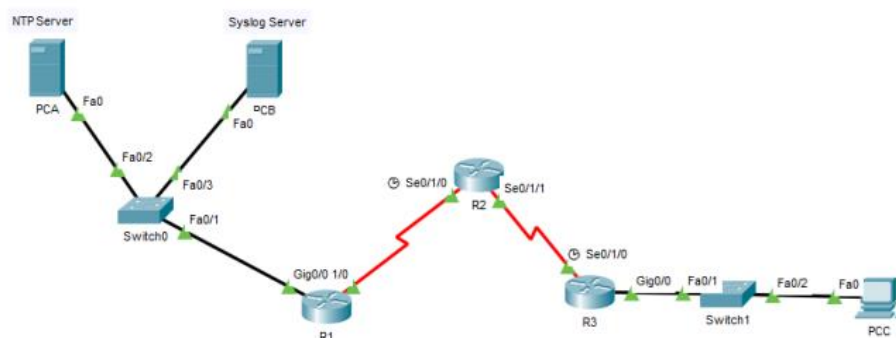

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	192.168.1.1	255.255.255.0	N/A
	se0/1/0	10.1.1.1	255.255.255.252	N/A
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A
	se0/1/1	10.2.2.2	255.255.255.252	N/A
R3	gig0/0	192.168.3.1	255.255.255.0	N/A
	se0/1/0	10.2.2.1	255.255.255.252	N/A
PC-A	NIC	192.168.1.5	255.255.255.0	192.168.1.1
PC-B	NIC	192.168.1.6	255.255.255.0	192.168.1.1
PC-C	NIC	192.168.3.5	255.255.255.0	192.168.3.1


2. Viva 5
3. Journal 5

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Configure an ACL that will permit one LAN to remotely access device in another LAN using SSH Protocol
 - Besides ICMP all traffic from other network is denied.
 - Verify the ACL implementation.

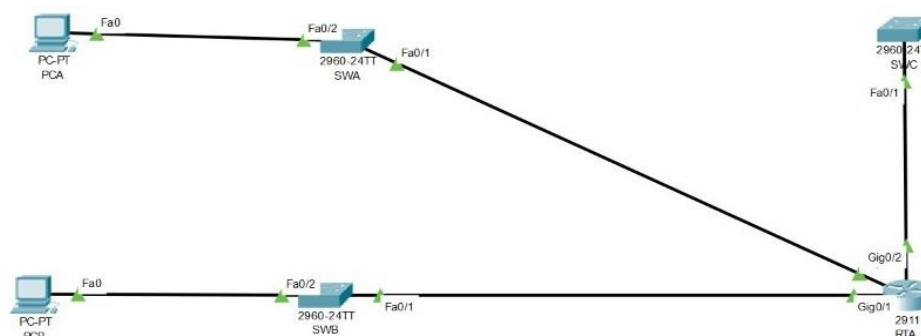

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
RTA	gig0/0	10.101.117.49	255.255.255.248	N/A
	gig0/1	10.101.117.33	255.255.255.240	N/A
	gig0/2	10.101.117.1	255.255.255.224	N/A
PCA	NIC	10.101.117.51	255.255.255.248	10.101.117.49
PCB	NIC	10.101.117.35	255.255.255.240	10.101.117.33
SWA	VLAN 1	10.101.117.50	255.255.255.248	10.101.117.49
SWB	VLAN 1	10.101.117.34	255.255.255.240	10.101.117.33
SWC	VLAN 1	10.101.117.2	255.255.255.224	10.101.117.1

- | | | |
|----|---------|---|
| 2. | Viva | 5 |
| 3. | Journal | 5 |

40


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Assign the Central switch as the root bridge.
 - Secure spanning-tree parameters to prevent STP manipulation attacks.
 - Enable port security to prevent CAM table overflow attacks.

40

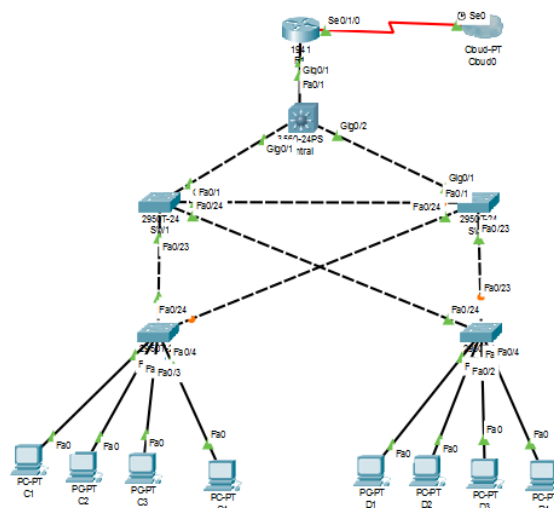

Addressing Table


Devices	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/1	192.168.1.1	255.255.255.0	N/A
	se0/0/0	209.165.200.1	255.255.255.0	N/A
C1	NIC	10.1.1.10	255.255.255.0	10.1.1.1
C2	NIC	10.1.1.11	255.255.255.0	10.1.1.1
C3	NIC	10.1.1.12	255.255.255.0	10.1.1.1
C4	NIC	10.1.1.13	255.255.255.0	10.1.1.1
D1	NIC	10.1.1.14	255.255.255.0	10.1.1.1
D2	NIC	10.1.1.15	255.255.255.0	10.1.1.1
D3	NIC	10.1.1.16	255.255.255.0	10.1.1.1
D4	NIC	10.1.1.17	255.255.255.0	10.1.1.1

2. Viva 5
3. Journal 5

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

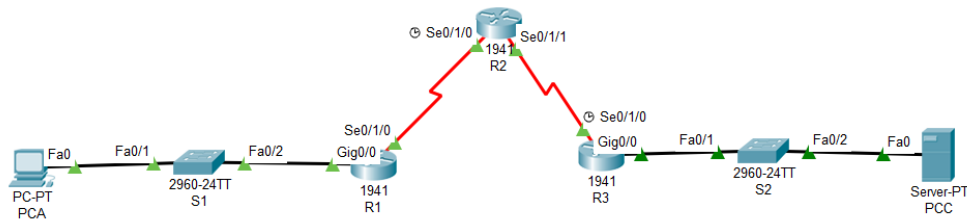1.	Create the following topology using static routing and configure - A zone-based policy (ZPF) firewall on R1 - Verify ZPF firewall functionality using ping, SSH and a web browser.  Addressing table <table><thead><tr><th>Device</th><th>Interface</th><th>IP Address</th><th>Subnet Mask</th><th>Default Gateway</th></tr></thead><tbody><tr><td rowspan="2">R1</td><td>gig0/0</td><td>192.168.1.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.1.1.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td rowspan="2">R2</td><td>se0/1/0</td><td>10.1.1.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>se0/1/1</td><td>10.2.2.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td rowspan="2">R3</td><td>gig0/0</td><td>192.168.3.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.2.2.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>PC-A</td><td>NIC</td><td>192.168.1.3</td><td>255.255.255.0</td><td>192.168.1.1</td></tr><tr><td>PC-C</td><td>NIC</td><td>192.168.3.3</td><td>255.255.255.0</td><td>192.168.3.1</td></tr></tbody></table> <tr><td>2.</td><td>Viva</td><td>5</td></tr> <tr><td>3.</td><td>Journal</td><td>5</td></tr>	Device	Interface	IP Address	Subnet Mask	Default Gateway	R1	gig0/0	192.168.1.1	255.255.255.0	N/A	se0/1/0	10.1.1.1	255.255.255.252	N/A	R2	se0/1/0	10.1.1.2	255.255.255.252	N/A	se0/1/1	10.2.2.2	255.255.255.252	N/A	R3	gig0/0	192.168.3.1	255.255.255.0	N/A	se0/1/0	10.2.2.1	255.255.255.252	N/A	PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1	PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1	2.	Viva	5	3.	Journal	5
Device	Interface	IP Address	Subnet Mask	Default Gateway																																													
R1	gig0/0	192.168.1.1	255.255.255.0	N/A																																													
	se0/1/0	10.1.1.1	255.255.255.252	N/A																																													
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A																																													
	se0/1/1	10.2.2.2	255.255.255.252	N/A																																													
R3	gig0/0	192.168.3.1	255.255.255.0	N/A																																													
	se0/1/0	10.2.2.1	255.255.255.252	N/A																																													
PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1																																													
PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1																																													
2.	Viva	5																																															
3.	Journal	5																																															

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1.

Create the following topology using static routing and

Configure, apply and verify an ACL that will block HTTP access on R1

Configure, apply and verify an ACL that will block HTTPS access on R1

Addressing Table

Device	Interface	IPv6 Address/Prefix	Default Gateway
PC1	NIC	2001:DB8:1:10::10/64	FE80::1
PC2	NIC	2001:DB8:1:11::11/64	FE80::1
R1	gig0/0	2001:DB8:1:10::1/64	FE80::1
	gig0/1	2001:DB8:1:11::1/64	FE80::1
	se0/1/0	2001:DB8:1:1::1/64	FE80::1
R2	se0/1/0	2001:DB8:1:1::2/64	FE80::2
	se0/1/1	2001:DB8:1:2::2/64	FE80::2
R3	gig0/0	2001:DB8:1:30::1/64	FE80::3
	se0/1/0	2001:DB8:1:2::1/64	FE80::3
Server	NIC	2001:DB8:1:30::30/64	FE80::3

2.

Viva

5

3.


Journal

5

UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

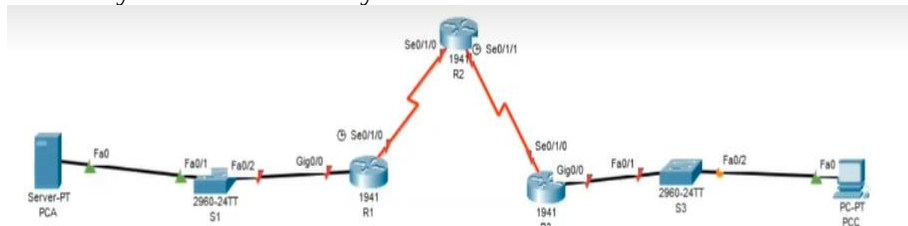1.	Create the following topology using static routing - Configure ACL to allow access to routers R1, R2, and R3 to only be permitted from PC-C, the management station. PC-C is also used for connectivity testing to PC-A, which is a server providing DNS, SMTP, FTP, and HTTPS services. - Verify ACL functionality  Addressing Table <table><thead><tr><th>Device</th><th>Interface</th><th>IP Address</th><th>Subnet Mask</th><th>Default Gateway</th></tr></thead><tbody><tr><td rowspan="2">R1</td><td>gig0/0</td><td>192.168.1.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.1.1.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td rowspan="3">R2</td><td>se0/1/0</td><td>10.1.1.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>se0/1/1</td><td>10.2.2.2</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>lo0</td><td>192.168.2.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td rowspan="2">R3</td><td>gig0/0</td><td>192.168.3.1</td><td>255.255.255.0</td><td>N/A</td></tr><tr><td>se0/1/0</td><td>10.2.2.1</td><td>255.255.255.252</td><td>N/A</td></tr><tr><td>PC-A</td><td>NIC</td><td>192.168.1.3</td><td>255.255.255.0</td><td>192.168.1.1</td></tr><tr><td>PC-C</td><td>NIC</td><td>192.168.3.3</td><td>255.255.255.0</td><td>192.168.3.1</td></tr></tbody></table>	Device	Interface	IP Address	Subnet Mask	Default Gateway	R1	gig0/0	192.168.1.1	255.255.255.0	N/A	se0/1/0	10.1.1.1	255.255.255.252	N/A	R2	se0/1/0	10.1.1.2	255.255.255.252	N/A	se0/1/1	10.2.2.2	255.255.255.252	N/A	lo0	192.168.2.1	255.255.255.0	N/A	R3	gig0/0	192.168.3.1	255.255.255.0	N/A	se0/1/0	10.2.2.1	255.255.255.252	N/A	PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1	PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1	40
Device	Interface	IP Address	Subnet Mask	Default Gateway																																												
R1	gig0/0	192.168.1.1	255.255.255.0	N/A																																												
	se0/1/0	10.1.1.1	255.255.255.252	N/A																																												
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A																																												
	se0/1/1	10.2.2.2	255.255.255.252	N/A																																												
	lo0	192.168.2.1	255.255.255.0	N/A																																												
R3	gig0/0	192.168.3.1	255.255.255.0	N/A																																												
	se0/1/0	10.2.2.1	255.255.255.252	N/A																																												
PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1																																												
PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1																																												
2.	Viva	5																																														
3.	Journal	5																																														


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology and
- Enable IOS IPS
 - Configure logging and verify IPS
 - Modify signature and verify again

40

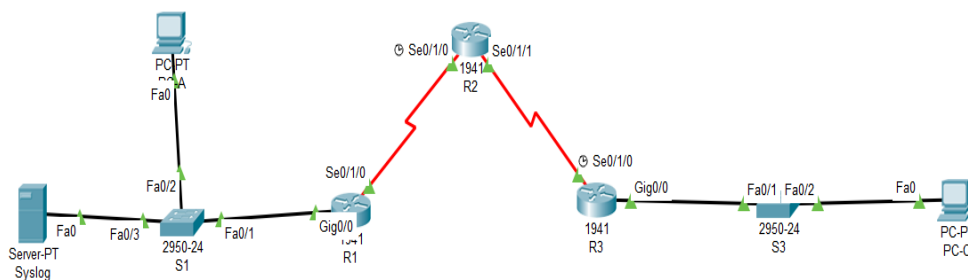

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	192.168.1.1	255.255.255.0	N/A
	se0/1/0	10.1.1.1	255.255.255.252	N/A
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A
	se0/1/1	10.2.2.2	255.255.255.252	N/A
R3	gig0/0	192.168.3.1	255.255.255.0	N/A
	se0/1/0	10.2.2.1	255.255.255.252	N/A
Syslog	NIC	192.168.1.50	255.255.255.0	192.168.1.1
PC-A	NIC	192.168.1.2	255.255.255.0	192.168.1.1
PC-C	NIC	192.168.3.2	255.255.255.0	192.168.3.1

2. Viva 5
3. Journal 5


UNIVERSITY OF MUMBAI
TY B.Sc. INFORMATION TECHNOLOGY PRACTICAL EXAMINATION
SEMESTER VI
SECURITY IN COMPUTING (USIT6P2)

Seat No: _____

Max. Marks: 50

1. Create the following topology using static routing and configure
- A zone-based policy (ZPF) firewall on R3
 - Verify ZPF firewall functionality using ping, SSH and a web browser.

40

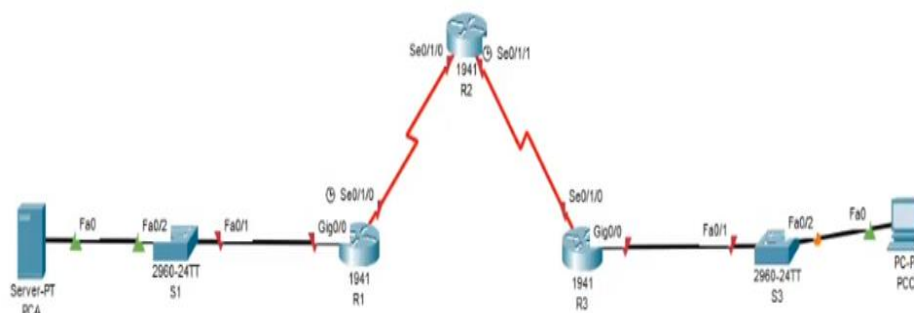

Addressing table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	gig0/0	192.168.1.1	255.255.255.0	N/A
	se0/1/0	10.1.1.1	255.255.255.252	N/A
R2	se0/1/0	10.1.1.2	255.255.255.252	N/A
	se0/1/1	10.2.2.2	255.255.255.252	N/A
R3	gig0/0	192.168.3.1	255.255.255.0	N/A
	se0/1/0	10.2.2.1	255.255.255.252	N/A
PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1
PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1

2. Viva 5
3. Journal 5