A weaker gate can raise recorded throughput

Synthetic derivation · defect probability 0.4 · no queue or repair

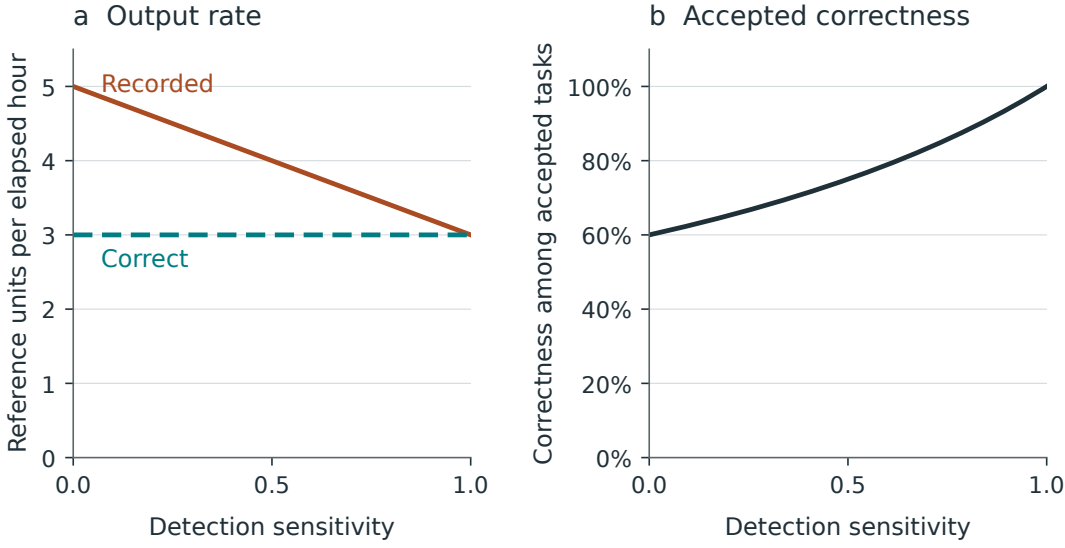

Ten reference units per task; two-hour attempts; no false-positive rejection.