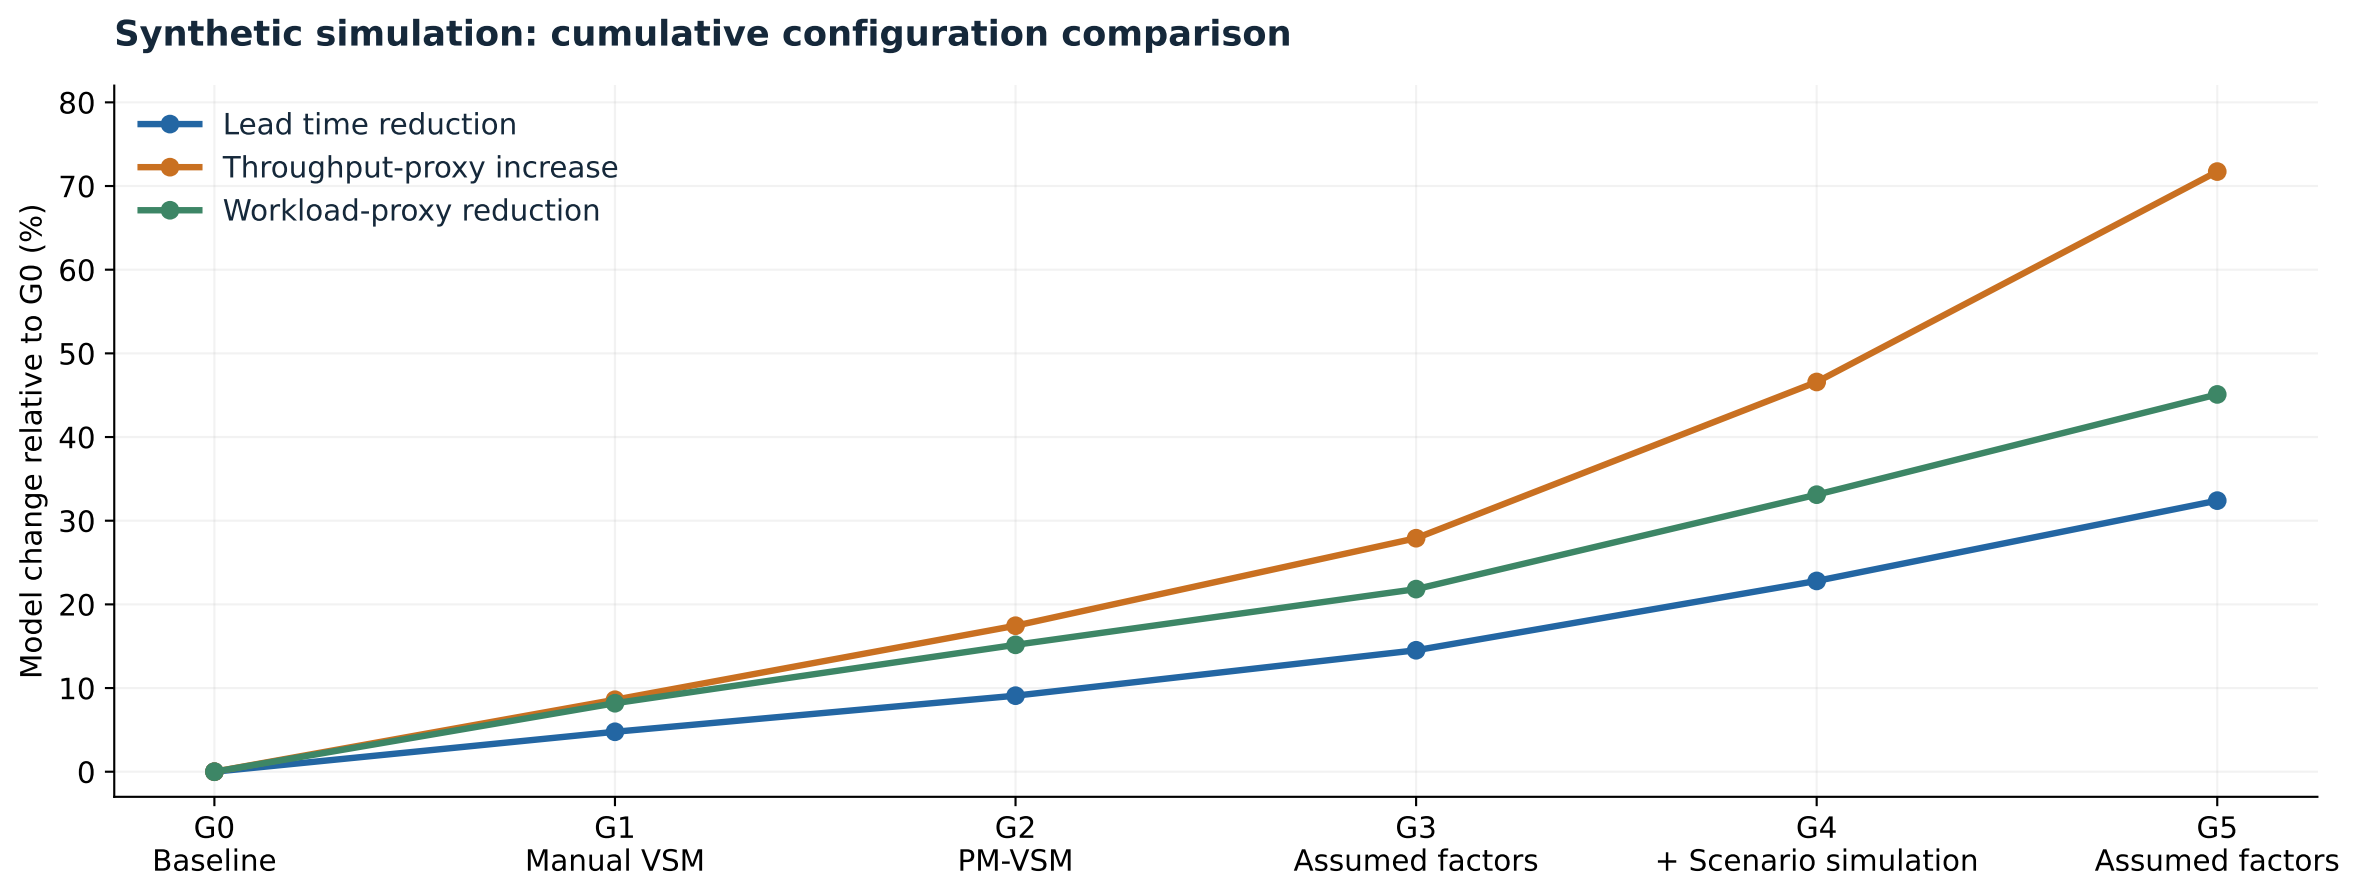
Synthetic simulation: cumulative configuration comparison
Lead time reduction
Throughput-proxy increase
Workload-proxy reduction
Model change relative to G0 (%)
0
10
20
30
40
50
60
70
80
G0
Baseline
G1
Manual VSM
G2
PM-VSM
G3
Assumed factors
G4
+ Scenario simulation
G5
Assumed factors