
IS: 730 : 1978 AS AMENDED (BS: 1494) HOOK BOLTS FOR CORRUGATED SHEET ROOFING BOLTS TO PROPERTY CLASS 4.6

TABLE - 1

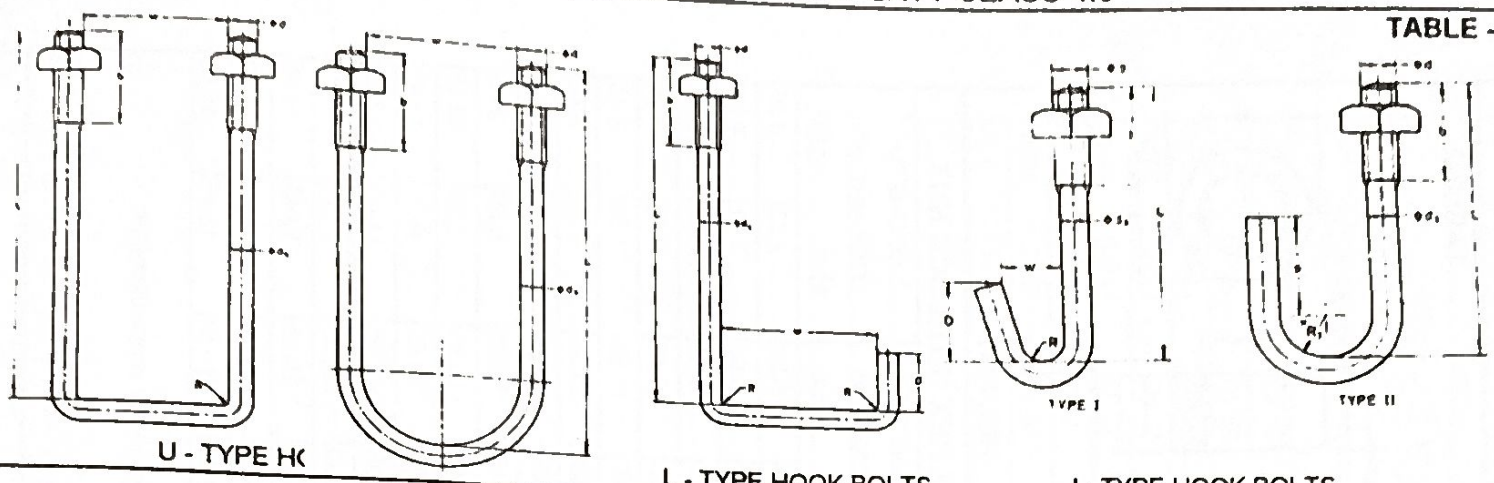

U - TYPE HK

L - TYPE HOOK BOLTS

J - TYPE HOOK BOLTS

DIMENSIONS OF J - TYPE HOOK BOLTS WITH SQUARE NUTS

NOMINAL SIZE	s		DEPTH, D		WIDTH, w		THREAD LENGTH, b	RADIUS, R MIN.	PREFERRED LENGTH, L	
	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.			BASIC	TOL.
M6	20	+2	15	+2	12	+2	25 + 2P	4	70 TO 150 IN STEPS OF 10	± 3
M8	25	+2	20	+2	14	+2	25 + 2P	4	70 TO 200 IN STEPS OF 10	± 3
M10	25	+2	20	+2	16	+2	25 + 2P	4	70 TO 200 IN STEPS OF 10	± 3

DIMENSIONS OF L - TYPE HOOK BOLTS WITH SQUARE NUTS

NOMINAL SIZE	INSIDE WIDTH, D		WIDTH, w		THREAD LENGTH, b	RADIUS, R		PREFERRED LENGTH, L	
	BASIC	TOL.	BASIC	TOL.		BASIC	TOL.	BASIC	TOL.
M8	20	± 2	50 60 70	± 2	30 + 2P	1.5	+1.5	120 TO 200 IN STEPS OF 10	± 3
M10	25	± 2	80 95	± 2 ± 3	30 + 2P	1.5	1.5	150 TO 200 IN STEPS OF 10	± 3
	30		110	± 3				180.190.200,225	± 3 UPTO 200 ± 4 > 200


DIMENSIONS OF U - TYPE HOOK BOLTS WITH SQUARE NUTS

NOMINAL SIZE	INSIDE WIDTH, w		THREAD LENGTH, b	RADIUS, R		PREFERRED LENGTH, L	
	BASIC	TOLERANCE		BASIC	TOL.	BASIC	TOL.
M8	50 60 80 90	± 2	30 + 2P	1.5	+1.5	150 TO 200 IN STEPS OF 10	± 3
						225	± 4
M10	50 60 80 90	± 2	30 + 2P	1.5	1.5	150 TO 200 IN STEPS OF 10	± 3
						225	± 4

FULL SIZE SHANK DIA. EQUAL TO THREAD MAJOR DIA. IS ALSO PERMITTED.
R1 TO BE SPECIFIED BY THE PURCHASER DEPENDING ON THE PIPE SIZE TO BE USED. THE TOL. ON THE SPECIFIED R1 SHALL BE +1.5 mm.
SQUARE NUTS USED WITH THE HOOK BOLTS SHALL CONFORM TO IS: 2585-1968 OR PRESSED NUTS AS SPECIFIED BY THE CUSTOMER.

IS: 1120-1975 REAFFIRMED 1988 HEXAGON HEAD COACH SCREWS (HEX.HEAD WOOD SCREWS) NORMAL SERIES (NO. 10 TO 32) MAT: AS GIVEN IN IS: 451-1972

TABLE - 1 A



DIMENSIONS OF HEXAGON HEAD COACH SCREWS

SCREW NO.	PITCH	DIAMETER OF UNTHREADED PORTION, d			ACROSS FLATS s			HEAD THICKNESS k			e	r
	P	NOM.	MIN	MAX	NOM.	MIN	MAX	NOM.	MIN	MAX	MIN	MAX
10	2.12	4.88	4.72	5.00	8.00	7.64	8.00	3.50	3.12	3.88	8.63	0.60
14	2.82	6.30	6.05	6.43	10.00	9.64	10.00	4.00	4.38	4.62	10.89	0.60
18	3.39	7.72	7.47	7.85	13.00	12.57	13.00	5.50	5.12	5.88	8.63	0.60
24	4.23	9.86	9.00	9.98	17.00	16.57	17.00	7.00	6.55	7.45	8.63	0.60
28	4.62	11.28	11.02	11.40	19.00	18.48	19.00	8.00	7.55	8.45	8.63	1.00
32	5.08	12.70	12.45	12.83	24.00	23.16	24.00	10.00	9.25	10.75	8.63	1.00