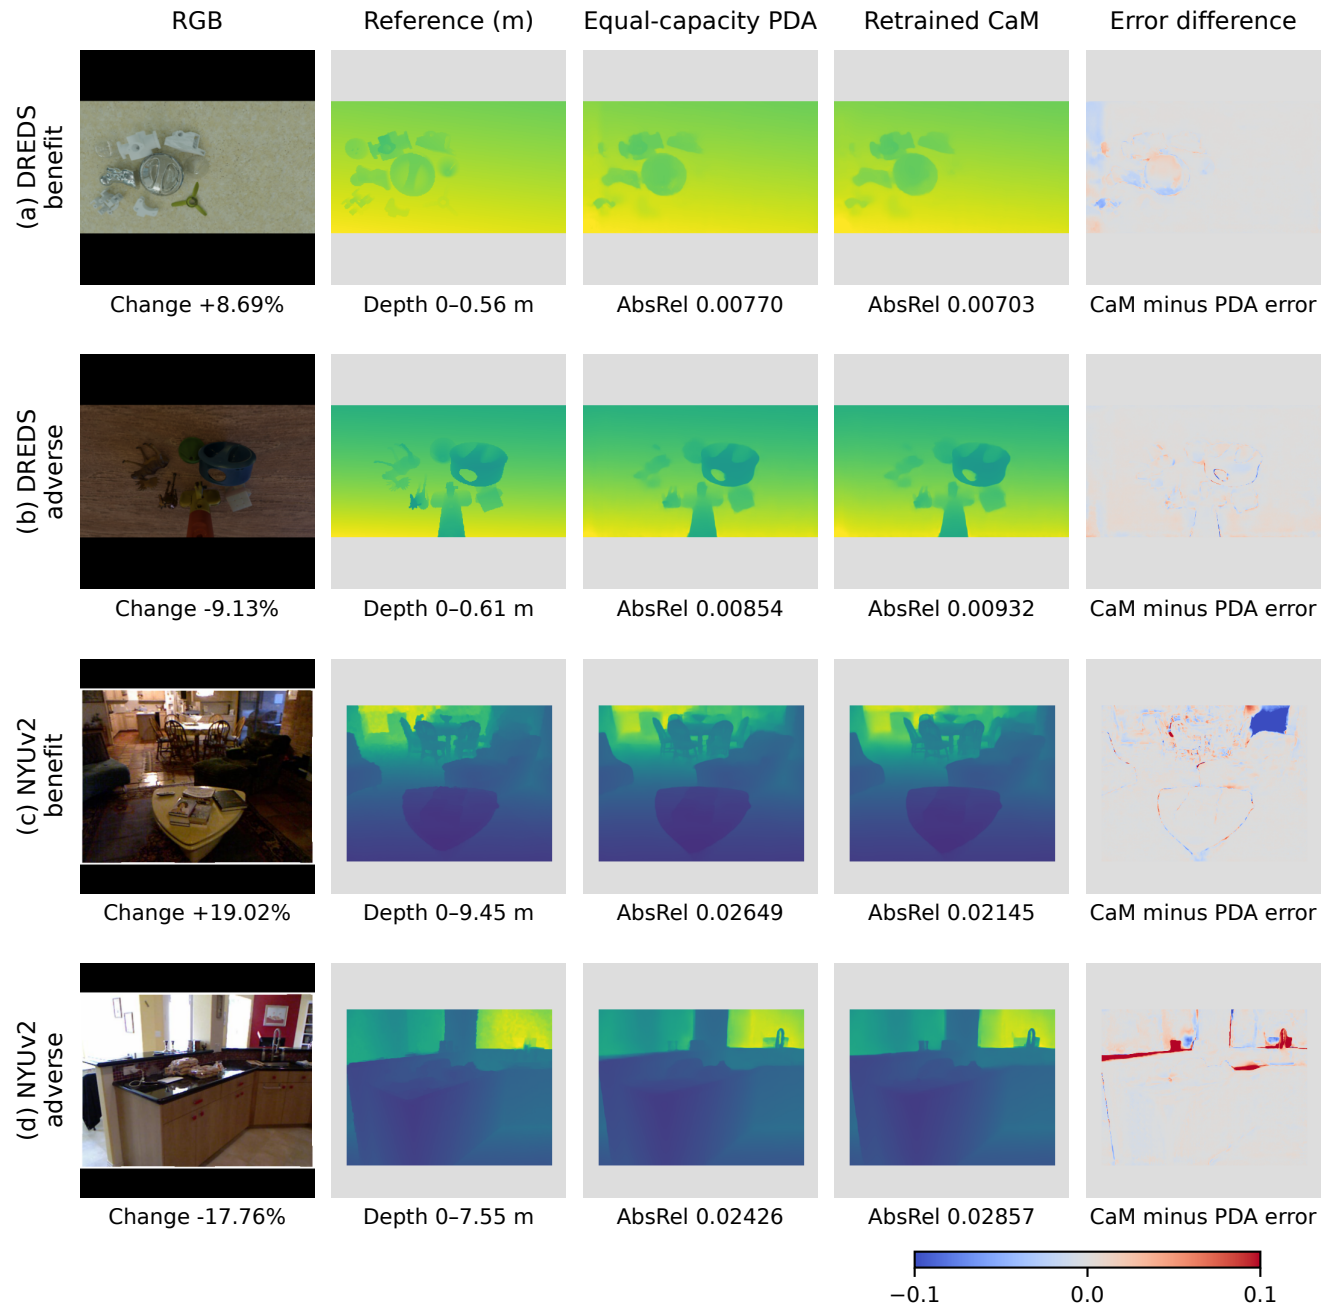

RGB
Reference (m)
Equal-capacity PDA
Retrained CaM
Error difference
(a) DREDS benefit
Change +8.69%
Depth 0–0.56 m
AbsRel 0.00770
AbsRel 0.00703
CaM minus PDA error
(b) DREDS adverse
Change -9.13%
Depth 0–0.61 m
AbsRel 0.00854
AbsRel 0.00932
CaM minus PDA error
(c) NYUv2 benefit
Change +19.02%
Depth 0–9.45 m
AbsRel 0.02649
AbsRel 0.02145
CaM minus PDA error
(d) NYUv2 adverse
Change -17.76%
Depth 0–7.55 m
AbsRel 0.02426
AbsRel 0.02857
CaM minus PDA error
−0.1
0.0
0.1