

5- FortiGate Firewall Policy Configuration

Overview

This guide demonstrates how to create a FortiGate firewall policy that allows devices on the LAN to access the Internet through the WAN interface using source NAT.

Lab Environment

Firewall: FortiGate VM64

Policy Name: LAN-to-Internet

Incoming Interface: LAN (port2)

Outgoing Interface: WAN (port1)

Source: all

Destination: all

Schedule: always

Service: ALL

Related Video: <https://www.youtube.com/watch?v=MSip2iQSyas>

Step 1 - Navigate to Firewall Policy

Navigate to Policy & Objects > Firewall Policy.

Step 2 - Create a New Policy


Select Create New to open the firewall policy configuration page.

Step 3 - Configure the Policy Name and Interfaces

Name: LAN-to-Internet

Incoming Interface: LAN (port2)

Outgoing Interface: WAN (port1)

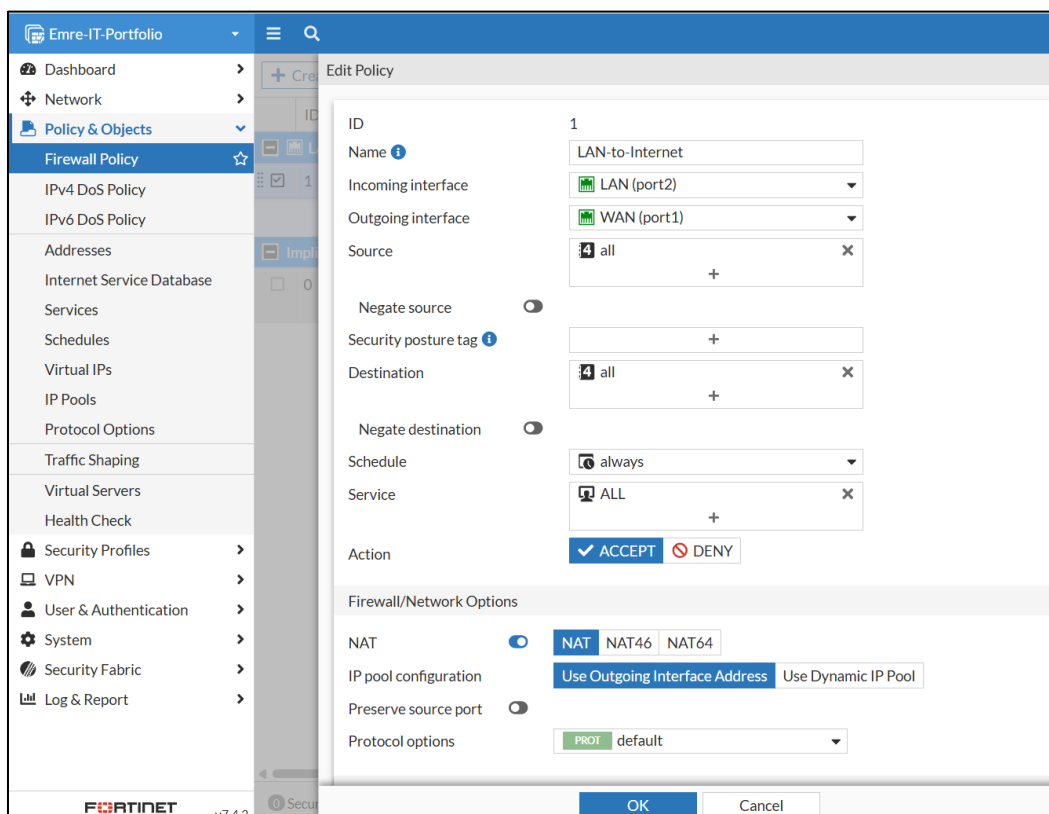

Step 4 - Configure Source and Destination

Source: all

Destination: all

Step 5 - Configure Schedule and Service

Schedule: always

Service: ALL

Step 6 - Configure Action and NAT

Action: ACCEPT

NAT: Enabled

IP Pool Configuration: Use Outgoing Interface Address

Protocol Options: default

Firewall/Network Options

NAT

☒

NAT

NAT46

NAT64

IP pool configuration

Use Outgoing Interface Address

Use Dynamic IP Pool

Preserve source port

☐

Protocol options

PROT

default

▼

Step 7 - Configure Logging

Enable Log allowed traffic and select All sessions. Leave Generate logs when session starts and Capture packets disabled.

Step 8 - Save the Policy

Ensure that the policy is enabled, then select OK.

Verification

Verify that the LAN-to-Internet policy appears above the implicit deny policy and shows LAN (port2) > WAN (port1), ACCEPT, NAT, and All logging.

ID	Name	Source	Destination	Schedule	Service	Action	IP Pool	NAT	Type	Security Profiles	Log
1	LAN-to-Internet	all	all	always	ALL	ACCEPT		NAT	Standard	SSL no-inspection	All
0	Implicit Deny	all	all	always	ALL	DENY					Disabled

Technical Notes

- FortiGate evaluates firewall policies from top to bottom and uses the first matching policy.
- The all source and destination objects with the ALL service are suitable for this lab; production policies should be restricted according to business requirements.
- Using the outgoing interface address translates LAN source addresses to the WAN interface address.
- All sessions records every allowed session and consumes more log storage than Security events.
- Security Profiles are outside the scope of this basic policy configuration and remain disabled.

Result

The LAN-to-Internet firewall policy is configured successfully. LAN devices can access the Internet through the WAN interface using source NAT, and all allowed sessions are logged.