


20210826 V1.1:

Changes:

C1 from 100 nF to 10 nF to reduce rise time of VDC

R8 from 470R to 1k to reduce current consumption blue voltage/therm/master LED (sufficient for EL357NC)

Footprints same, still compatible with PCB 20210708 V1.0

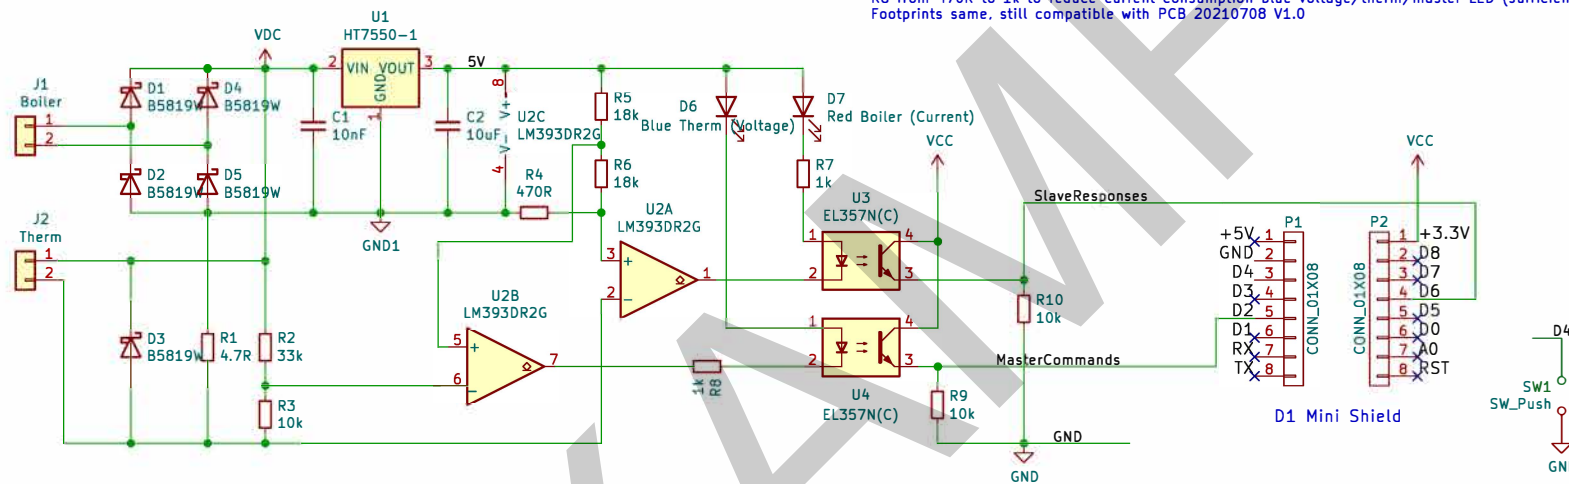

Author:
Marco Winkelman
Windesheim University of Applied Science
Lectoraat Energietransitie

Licensed under CERN-OHL-P v2

Sheet: /
File: OpenThermMonitorTwomes.sch

Title: OpenTherm Monitor Twomes

Size: A4 Date: 2021-08-26 V1.1
KiCad E.D.A. kicad (6.0.0)

Rev:
Id: 1/1