dotvolt
Innovative Power Solutions


UPS Aküsü (DT Serisi)

DT 12V 10 AH

Container Color
■ Black C



Plane Chart:

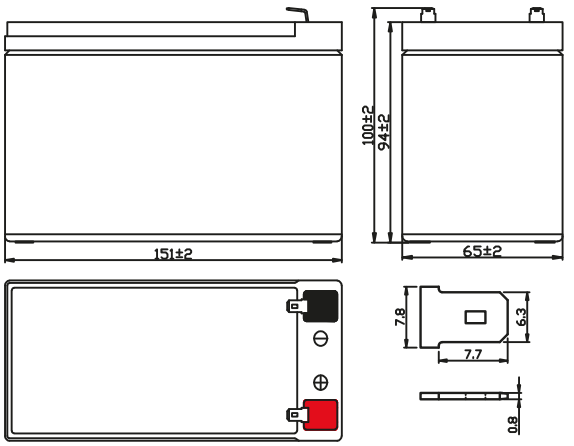

Unit:(mm)

Parameter

Rated Voltage		12V
Nominal Capacity(25℃)		9 .0Ah(C_{20},10.5V)
Dimension	Length	151±2mm(5.94 inch)
	Width	65±2mm(2.56 inch)
	Container Height	94±2mm(3.70 inch)
	Total Height	100±2mm(3.94 inch)
Weight±3%		2.40Kg(5.29 lbs)
Terminal		F2
Container Material		ABS
Rated Capacity(25℃)	7.40Ah	(5HR,1.48A,10.5V)
	6.96Ah	(3HR,2.32A,10.2V)
	5.65Ah	(1HR,5.65A,9.6V)
Full charged Internal Resistance(25℃)		Approx.18mΩ
Operating Temp.Range	Discharge	-20℃~50℃(-4℉~122℉)
	Charge	-20℃~40℃(-4℉~104℉)
	Storage	-20℃~40℃(-4℉~104℉)
Nominal Operating Temp.Range		25±3℃(77±5℉)
Max.Charging Current(25℃)		2.7A
Charge Voltage(25℃)	Cycle	14.5~14.9V
	Temp. Coefficient	-30mV/℃
	Float	13.6~13.8V
	Temp. Coefficient	-18mV/℃
Self Discharge(25℃)		≤3% per month
Design service life(25℃)		6 years

Constant Current Discharge Characteristics (A, 25°C)

F.V./Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	35.8	22.8	17.6	13.2	9.70	5.65	3.26	2.35	1.84	1.51	1.03	0.84	0.457
10.02V	34.2	21.5	16.9	12.9	9.35	5.55	3.19	2.33	1.81	1.50	1.02	0.83	0.454
10.20V	34.0	21.2	16.7	12.7	9.25	5.52	3.17	2.32	1.80	1.49	1.01	0.82	0.452
10.50V	32.5	20.4	16.1	12.3	9.05	5.40	3.12	2.28	1.78	1.48	1.00	0.81	0.450
10.80V	30.7	19.5	15.4	11.9	8.75	5.25	3.07	2.25	1.76	1.46	0.99	0.80	0.435

Constant Power Discharge Characteristics (Watt, 25°C)

F.V./Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	392.5	257.2	201.2	151.8	109.6	66.6	38.5	27.8	22.8	17.9	12.24	9.95	5.47
10.02V	374.8	243.0	193.5	148.4	105.7	65.4	37.7	27.6	21.4	17.8	12.12	9.80	5.44
10.20V	378.1	240.5	192.3	146.1	104.5	65.1	37.4	27.4	21.3	17.7	12.00	9.74	5.41
10.50V	362.3	231.5	185.2	141.5	102.3	63.7	36.8	27.0	21.1	17.6	11.88	9.62	5.39
10.80V	342.5	221.8	178.0	136.9	98.9	61.9	36.3	26.6	20.9	17.3	11.76	9.50	5.18

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.