dotvolt
Innovative Power Solutions


# UPS Aküsü (SC Serisi)

## SC 12V 5 AH

Container Color
■ Black C




### Plane Chart:

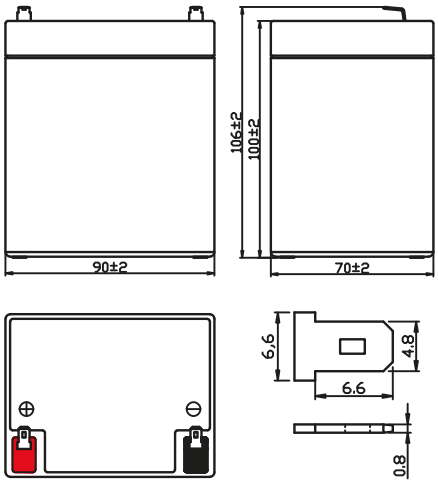


Unit:(mm)

### Parameter

| | | |
|---|---|---|
| Rated Voltage | | 12V |
| Nominal Capacity(25℃) | | 4.5Ah($C_{20}$,10.5V) |
| Dimension | Length | 90±2mm(3.54 inch) |
| | Width | 70±2mm(2.76 inch) |
| | Container Height | 100±2mm(3.94 inch) |
| | Total Height | 106±2mm(4.17 inch) |
| Weight±3% | | 1.44Kg(3.17 lbs) |
| Terminal | | F1 |
| Container Material | | ABS |
| Rated Capacity(25℃) | 3.85Ah | (5HR,0.77A,10.5V) |
| | 3.48Ah | (3HR,1.16A,10.2V) |
| | 2.67Ah | (1HR,2.67A,9.6V) |
| Full charged Internal Resistance(25℃) | | Approx.40mΩ |
| Operating Temp.Range | Discharge | -20℃~50℃(-4℉~122℉) |
| | Charge | -20℃~40℃(-4℉~104℉) |
| | Storage | -20℃~40℃(-4℉~104℉) |
| Nominal Operating Temp.Range | | 25±3℃(77±5℉) |
| Max.Charging Current(25℃) | | 1.35A |
| Charge Voltage(25℃) | Cycle | 14.5~14.9V |
| | Temp. Coefficient | -30mV/℃ |
| | Float | 13.6~13.8V |
| | Temp. Coefficient | -18mV/℃ |
| Self Discharge(25℃) | | ≤3% per month |
| Design service life(25℃) | | 6 years |

### Constant Current Discharge Characteristics (A, 25°C)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 1h | 2h | 3h | 4h | 5h | 8h | 10h | 20h |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9.60V | 15.3 | 9.0 | 7.50 | 6.30 | 4.40 | 2.67 | 1.58 | 1.20 | 0.96 | 0.80 | 0.532 | 0.443 | 0.235 |
| 10.02V | 14.5 | 8.7 | 7.40 | 6.13 | 4.27 | 2.59 | 1.54 | 1.17 | 0.95 | 0.79 | 0.522 | 0.435 | 0.231 |
| 10.20V | 14.1 | 8.6 | 7.32 | 6.02 | 4.20 | 2.54 | 1.52 | 1.16 | 0.94 | 0.78 | 0.519 | 0.431 | 0.230 |
| 10.50V | 13.3 | 8.4 | 7.20 | 5.85 | 4.10 | 2.48 | 1.48 | 1.14 | 0.93 | 0.77 | 0.510 | 0.425 | 0.227 |
| 10.80V | 12.3 | 8.1 | 7.05 | 5.72 | 4.02 | 2.43 | 1.44 | 1.12 | 0.92 | 0.76 | 0.500 | 0.420 | 0.222 |

### Constant Power Discharge Characteristics (Watt, 25°C)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 1h | 2h | 3h | 4h | 5h | 8h | 10h | 20h |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9.60V | 160.7 | 97.2 | 81.0 | 70.2 | 50.2 | 30.7 | 18.4 | 14.1 | 11.2 | 9.44 | 6.32 | 5.27 | 2.81 |
| 10.02V | 153.7 | 94.4 | 80.3 | 68.3 | 48.7 | 29.8 | 17.9 | 13.7 | 11.1 | 9.32 | 6.20 | 5.18 | 2.76 |
| 10.20V | 151.6 | 93.7 | 79.8 | 67.1 | 47.9 | 29.2 | 17.7 | 13.6 | 10.9 | 9.20 | 6.17 | 5.13 | 2.75 |
| 10.50V | 144.3 | 92.0 | 78.8 | 65.2 | 46.7 | 28.5 | 17.2 | 13.4 | 10.8 | 9.09 | 6.06 | 5.06 | 2.71 |
| 10.80V | 135.3 | 89.5 | 77.9 | 63.8 | 45.8 | 27.9 | 16.8 | 13.2 | 10.7 | 8.97 | 5.94 | 5.00 | 2.66 |

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.