

NOTES:

1. VOLTAGE RATING : 125 VAC RMS.

2. CURRENT RATING : 1.5 AMP.

3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.

4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .

5. DIELECTRIC STRENGTH :1000V AC RMS 50HZ. 1MIN.

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.

2. CONTACT MATERIAL
: PHOSPHOR BRONZE 0.35X0.6mm.

3. PLATING :GOLD PLATING OVER NICKEL.

4. OPERATING : 750 CYCLES MIN.


5. PCB RETENTION PRE-SOLDER : 1 LB MIN.



1. Temperature Range : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

2. Relative Humidity : 90~95% ($40\pm 2^{\circ}\text{C}$)

PART NUMBER:

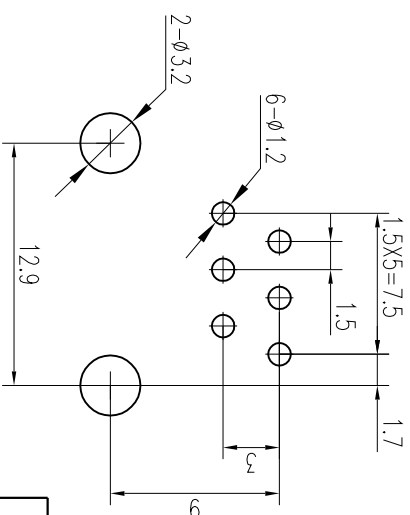

PDF created with FinePrint pdfFactory trial version <http://www.fineprint.com>