

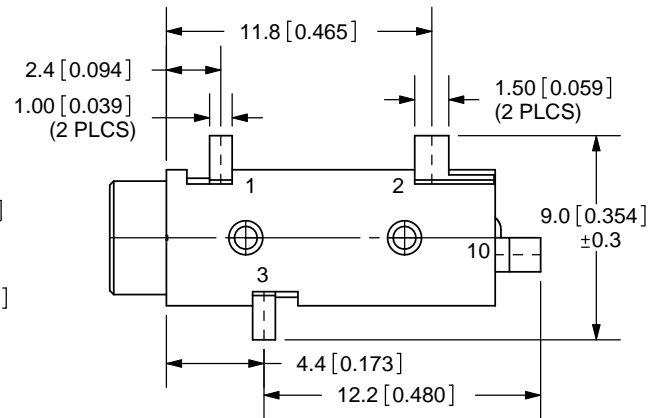
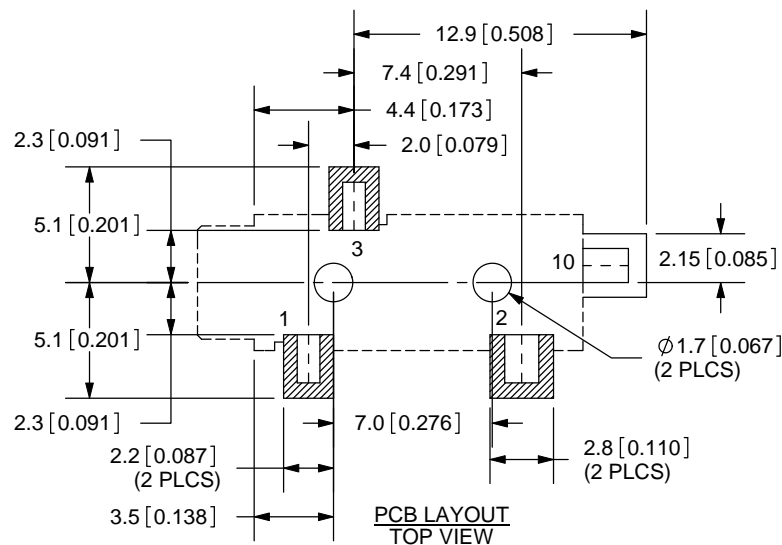
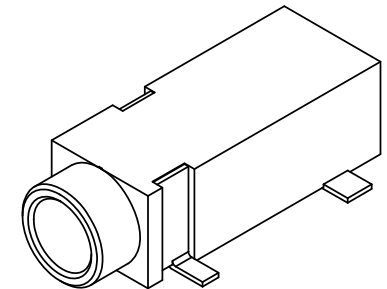


REV.	DESCRIPTION	DATE
B	Updated PCB layout	5/26/2006
C	Update Plastic Mold	12/18/07
D	added housing color options	4/30/2010

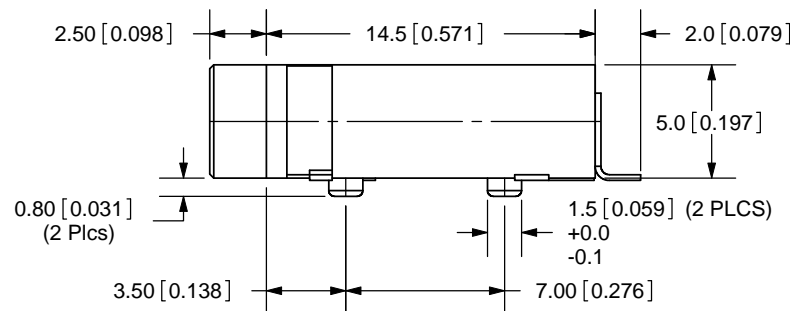

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

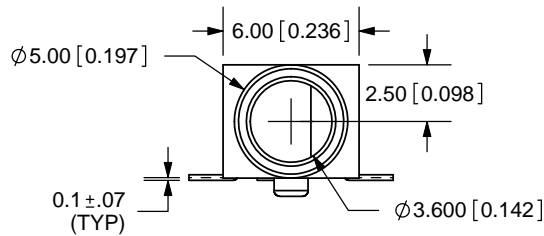

MODEL NO.	SJ-3524-SMT
SCHEMATIC	

COLOR INDEX	
PART NO.	COLOR
SJ-3524-SMT	Black
SJ-3524-SMT-BE	Blue
SJ-3524-SMT-GR	Green
SJ-3524-SMT-PI	Pink



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

PC FILE NAME:
SJ-3524-SMT

COPYRIGHT 2010 BY CUI INC.

	MATERIAL	PLATING
TERMINALS 1-3	Copper Alloy	Silver
TERMINAL 10	Brass	Silver
HOUSING	PA6T	

TITLE: 3.5mm SURFACE MOUNT AUDIO JACK-STEREO	REV: C
PART NO. SJ-3524-SMT	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 3:1