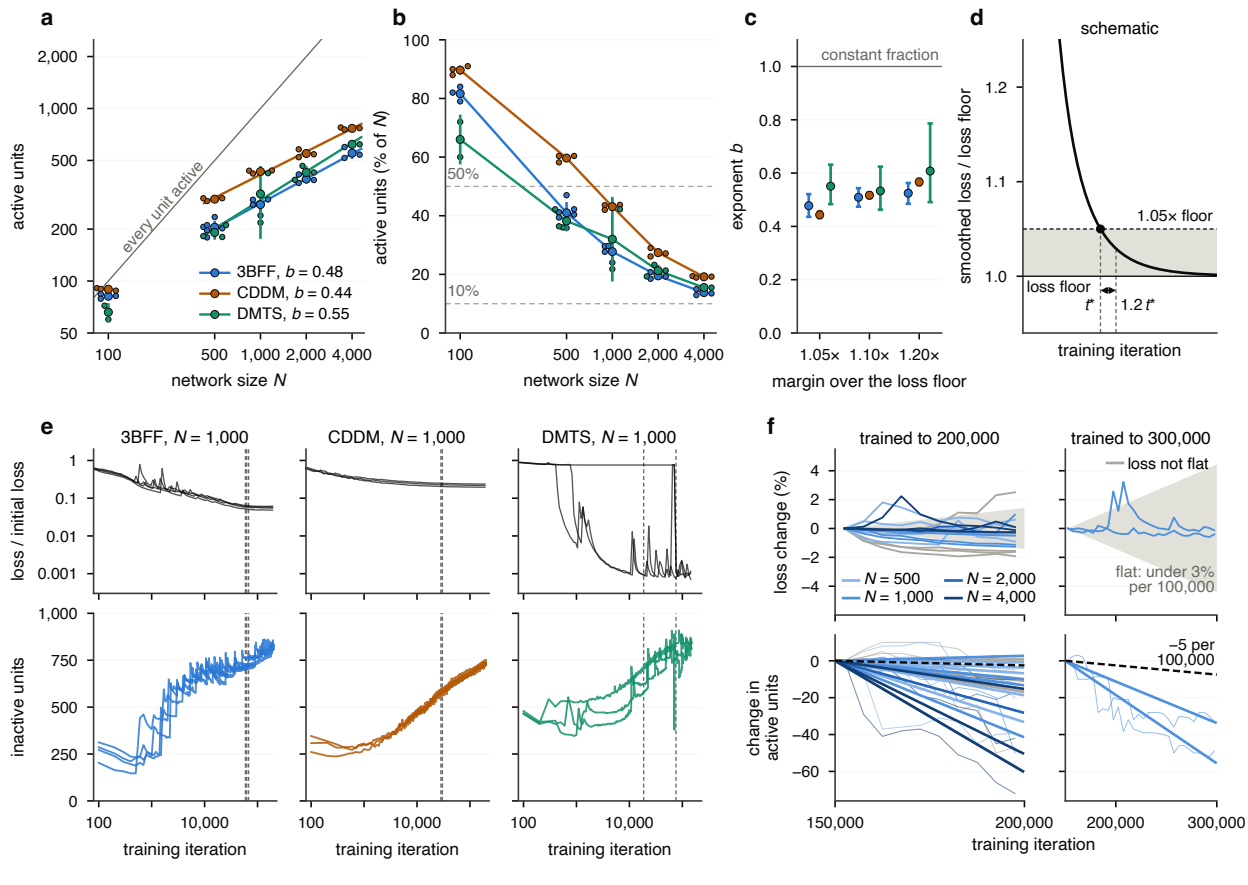

a
active units
every unit active
3BFF, b = 0.48
CDDM, b = 0.44
DMTS, b = 0.55
network size N
b
active units (% of N)
50%
10%
network size N
c
constant fraction
exponent b
margin over the loss floor
d
schematic
smoothed loss / loss floor
1.05× floor
loss floor
t*
1.2 t*
training iteration
e
3BFF, N = 1,000
CDDM, N = 1,000
DMTS, N = 1,000
loss / initial loss
inactive units
training iteration
f
trained to 200,000
trained to 300,000
loss not flat
loss change (%)
N = 500
N = 1,000
N = 2,000
N = 4,000
flat: under 3% per 100,000
change in active units
–5 per 100,000
training iteration