
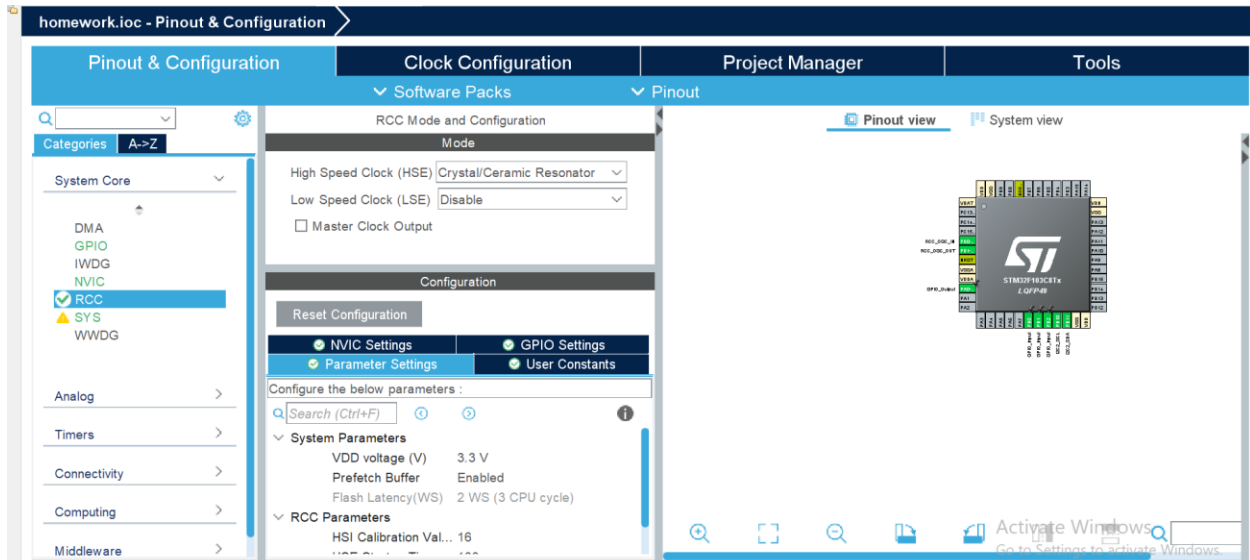


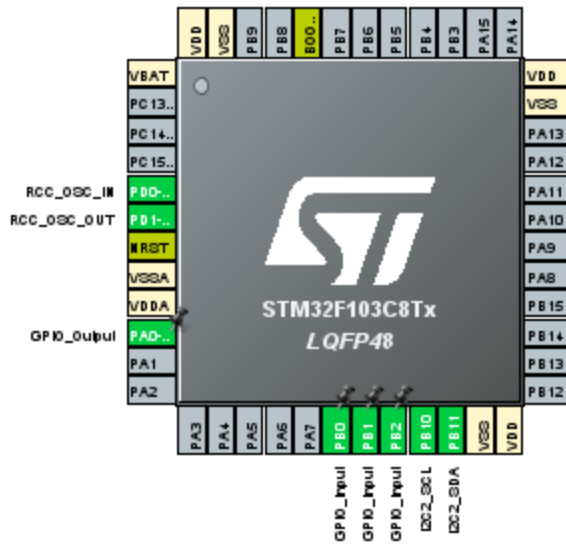

Pinout & Configuration

Clock Configuration

Software Packs

Pinout



Categories

A->Z

System Core



Analog



Timers



RTC

TIM1

TIM2

TIM3

TIM4

Connectivity



Computing



Middleware



TIM3 Mode and Configuration

Mode

Slave Mode

Disable



Trigger Source

Disable

☒ Internal Clock

Channel1

Disable



Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

NVIC Interrupt Table

Enabled

Preemption Priority

Subpriority

TIM3 global interrupt

☒

0

0

Pinout & Configuration

Clock Configuration

Software Packs

Pinout



Categories

A->Z

System Core



Analog



Timers



Connectivity



CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

I2C2 Mode and Configuration

Mode

I2C

I2C



Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ GPIO Settings☒ Parameter Settings☒ User Constants


Configure the below parameters :



Master Features

I2C Speed Mode

Standard Mode

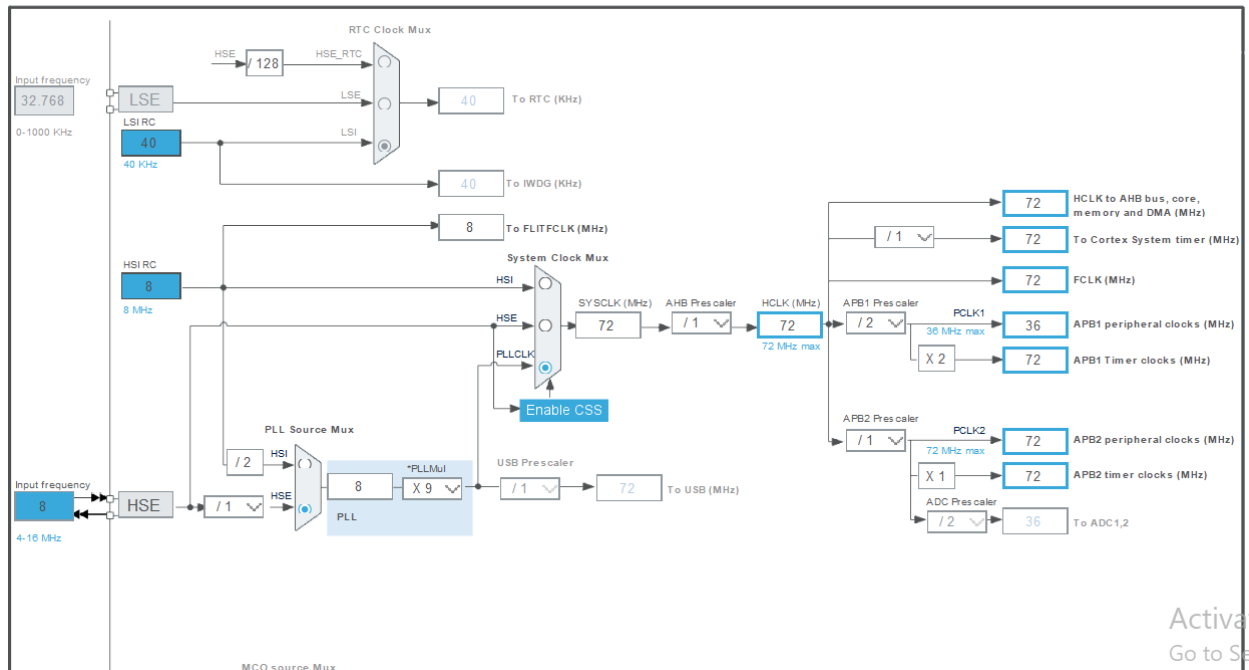

homework.ioc - Project Manager

Pinout & Configuration	Clock Configuration	Project Manager	Tools
Project	Project Settings Project Name: homework Project Location: C:\Users\ASUS\STM32CubeIDE\workspace_1.9.0 Browse		
Code Generator	Application Structure: Advanced Do not generate the main() Toolchain Folder Location: C:\Users\ASUS\STM32CubeIDE\workspace_1.9.0\homework\		
Advanced Settings	Toolchain / IDE: STM32CubeIDE Generate Under Root Linker Settings Minimum Heap Size: 0x200 Minimum Stack Size: 0x400 Thread-safe Settings Cortex-M3NS ☐ Enable multi-threaded support Thread-safe Locking Strategy: Default - Mapping suitable strategy depending on RTOS selection. Mcu and Firmware Package Mcu Reference: STM32F103C8Tx Firmware Package Name and Version: STM32Cube FW_F1 V1.8.7 Use latest available version		

Activat
Go to Se

Activate Windows
Go to Settings to activate Windows.