
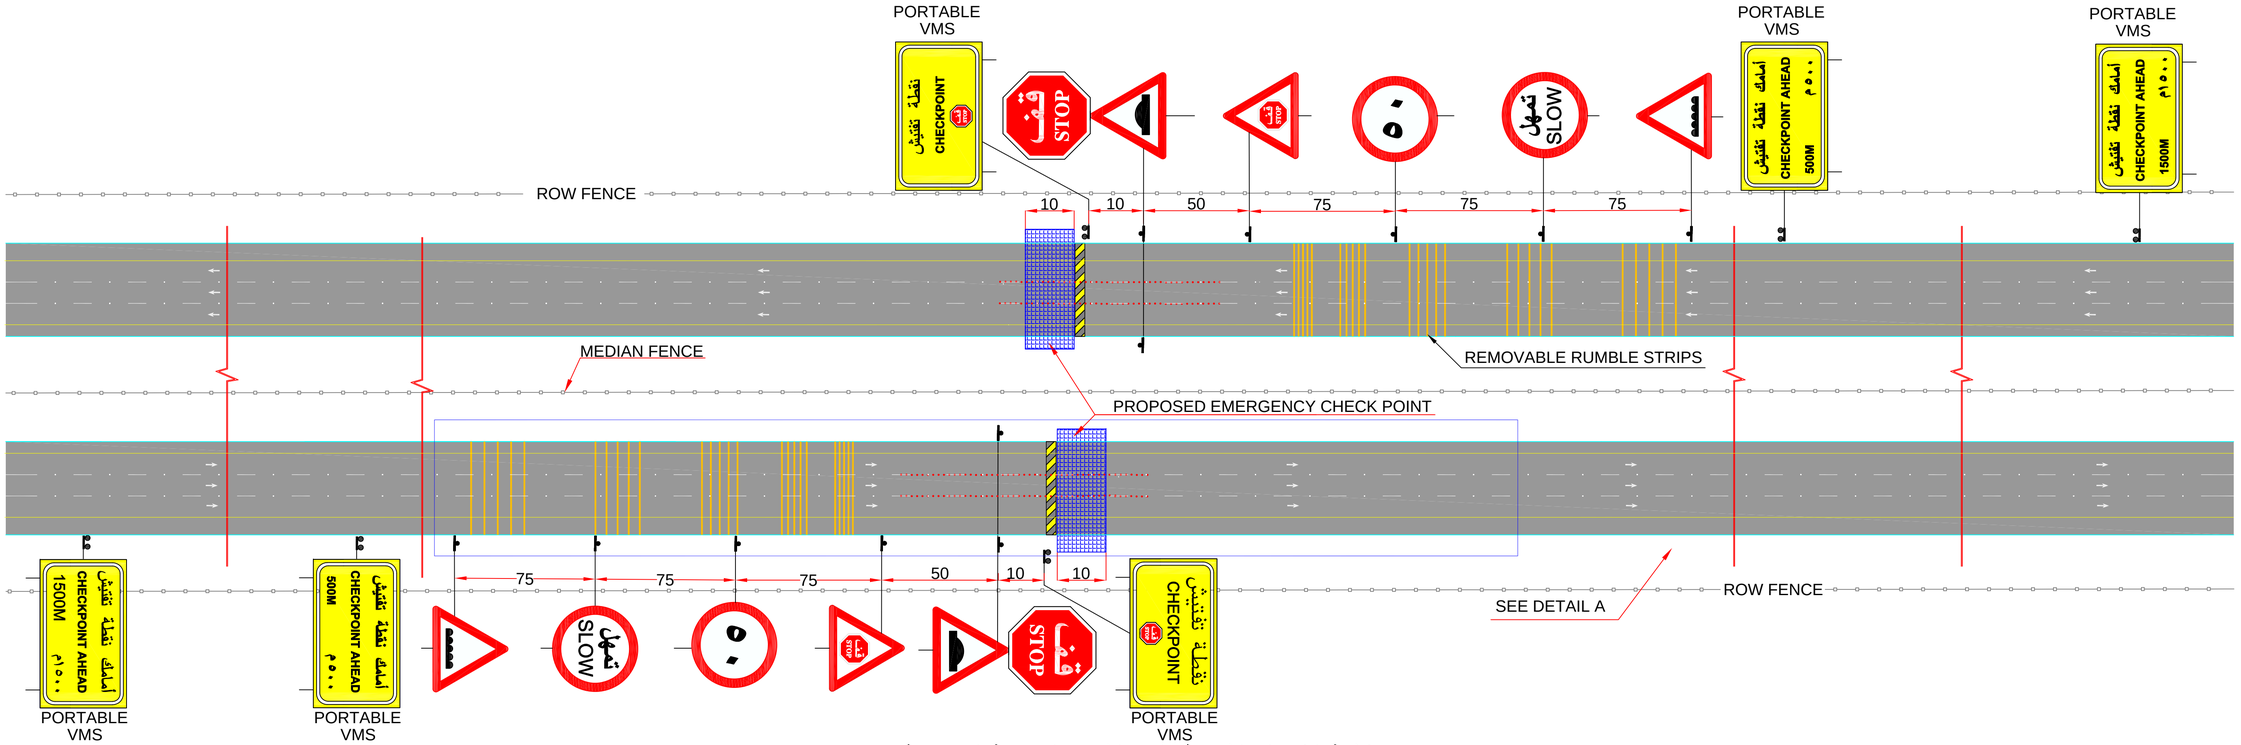


نقطــة التفتيــش الطارئــة علــي الطــرق الســريعة المزدوجــة


EMERGENCY CHECK POINT AT DIVIDED HIGHWAY TYPE (C)

N.T.S

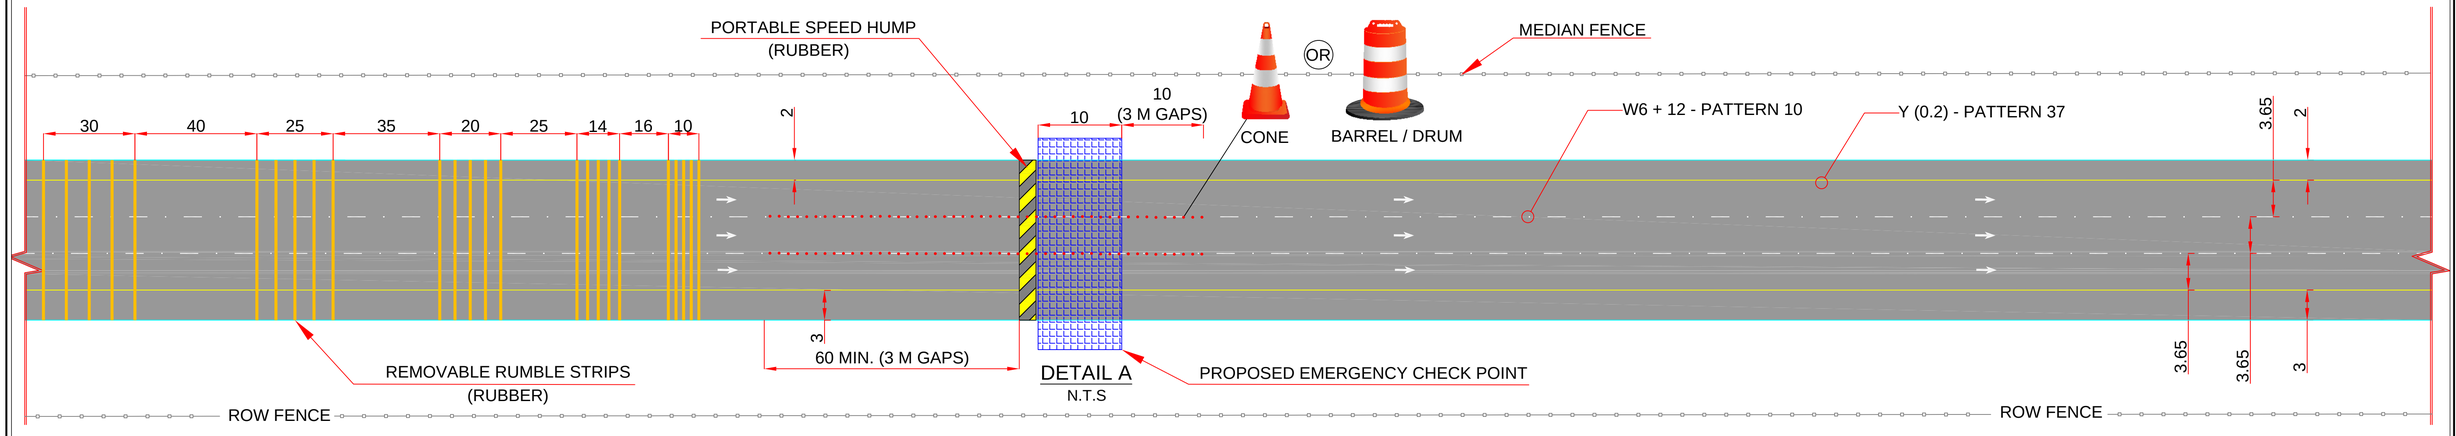

DETAIL A


N.T.S

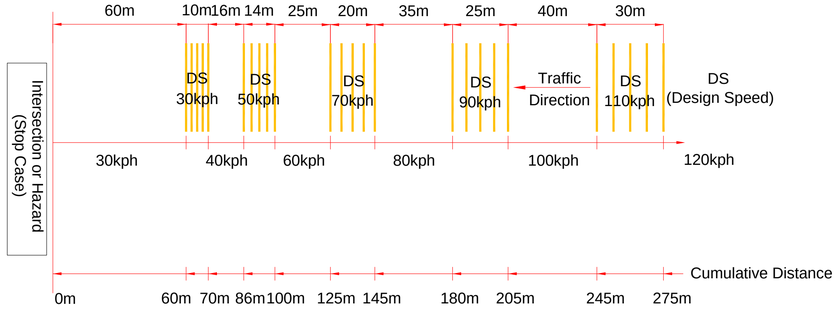

DETAIL C : PORTABLE RUMBLE STRIP ARRANGEMENT INTERVALS

N.T.S

DS (kph)	Y (m)	Y/4 (m)
110	30	7.50
90	25	6.25
70	20	5.00
50	14	3.50
30	10	2.50



NOTES

1. ALL INFORMATIVE AND GUIDANCE SIGNS SHOULD BE PORTABLE VMS SIGNS .
2. WARRING AND REGULATORY SIGNS ARE PREFERRED TO BE PORTABLE VMS, HOWEVER PORTABLE ORDINARY SIGNS COULD BE USED.
3. MINIMUM HEIGHT OF RUBBER PORTABLE RUMBLE STRIPS IS 10MM, AND MINIMUM HEIGHT OF RUBBER SPEED HUMP IS 150MM.

KINGDOM OF SAUDI ARABIA

MINISTRY OF TRANSPORT

وزارة النقل TRANSPORT MINISTRY

TITLE :

المخطـط النموذجـي - (ج) لنقطــة التفتيــش الطارئــة علــي الطــرق الســريعة المزدوجــة

TYPICAL SAFETY DEVICES AT APPROACHES TO EMERGENCY CHECK POINT AT DIVIDED HIGHWAY - TYPE (C)

DRAWING NUMBER	DATE : DECEMBER 2018
RD1-MOT-RSD-DWG-1812-003	SHEET SIZE: A1