




RP2040 + 12 MHz crystal + 1.1 V core

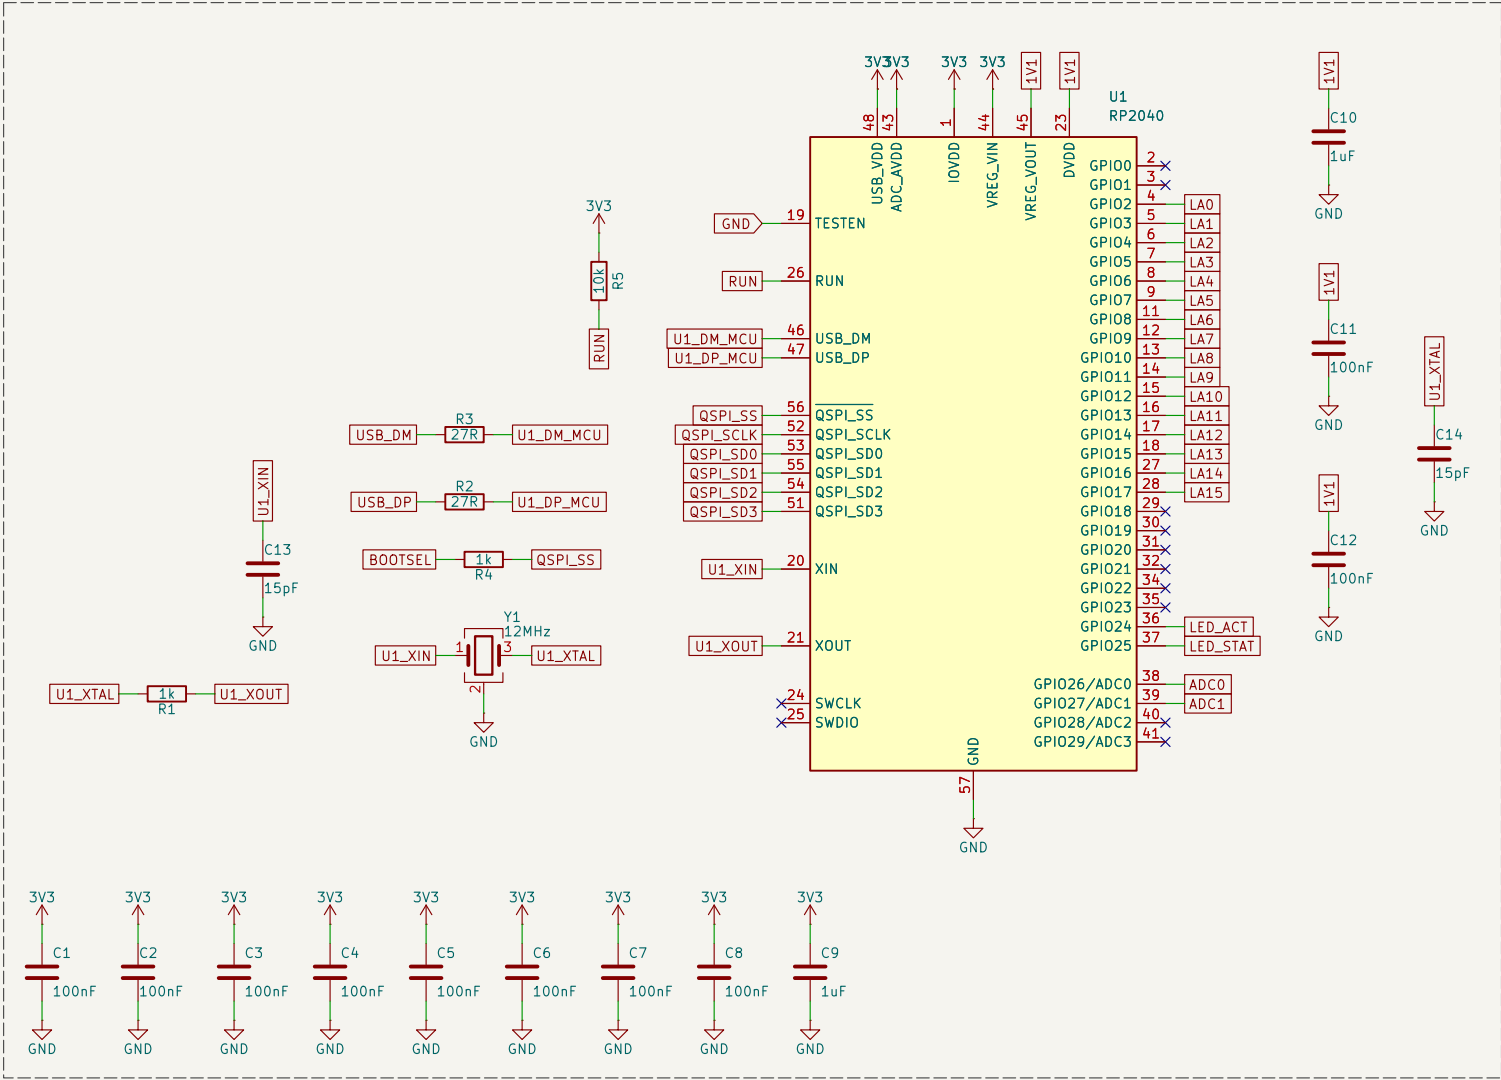


W25Q128JV 16 MB QSPI flash

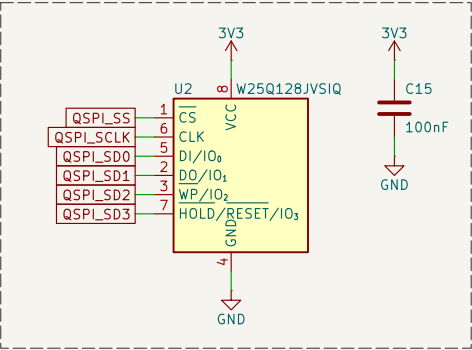


USB-C: 5 V in + USB 2.0 FS data

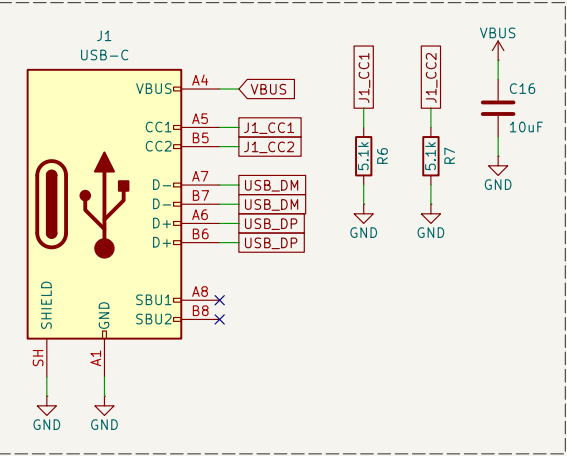


USB ESD clamp




3.3 V LDO (AP2112K-3.3) from VBUS

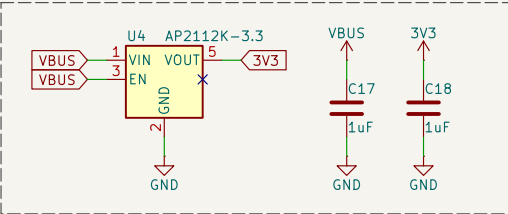


Logic inputs D0-D7

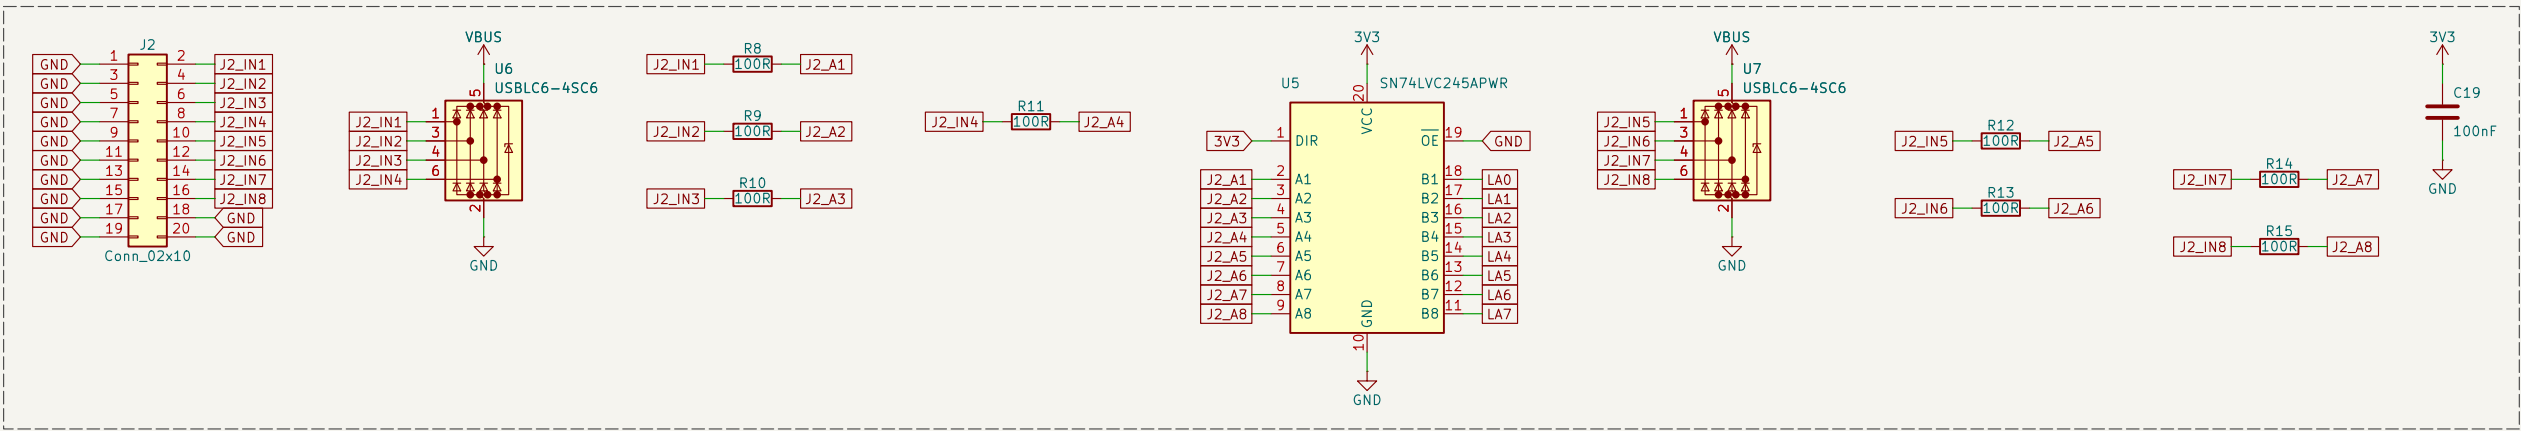


Logic inputs D8-D15

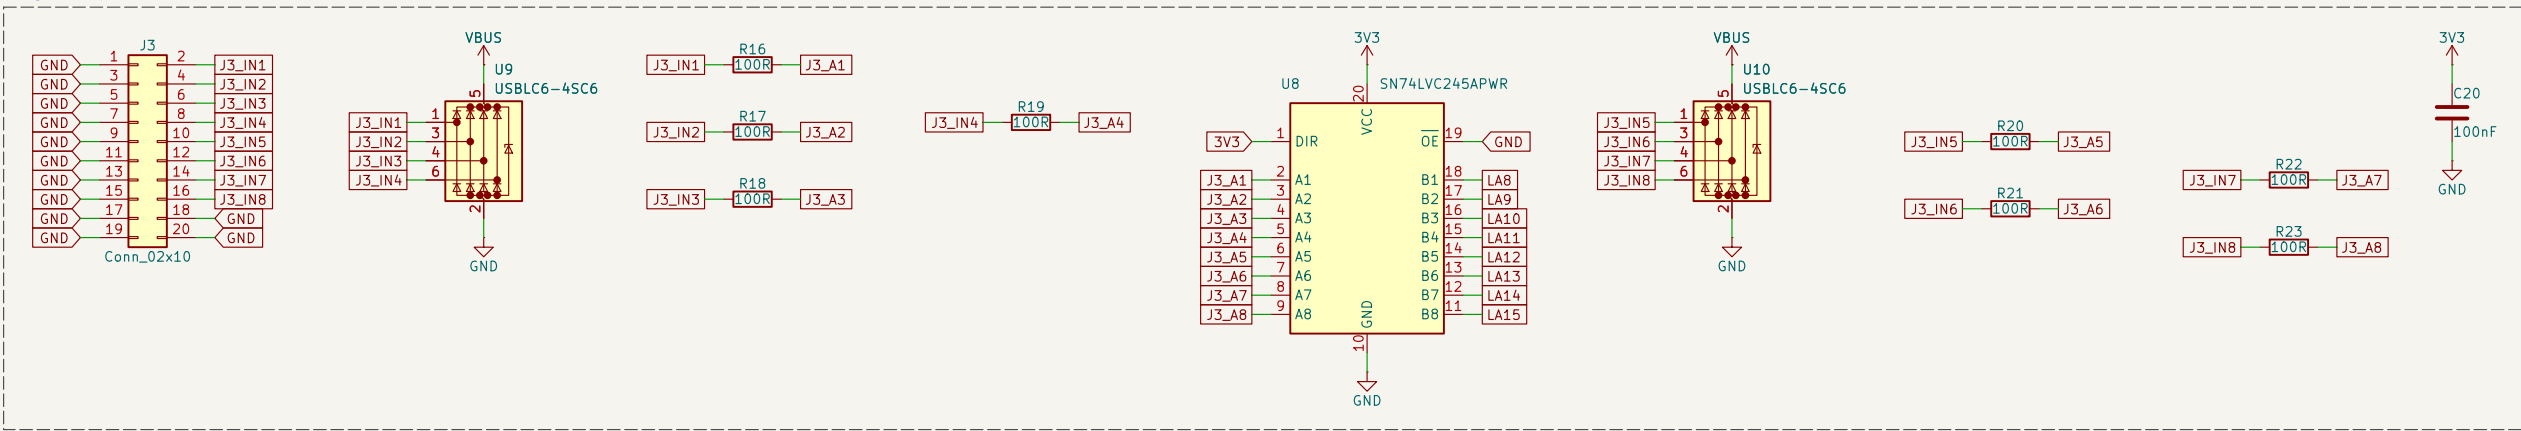


Scope CH1 -> ADC0 (GPIO26)

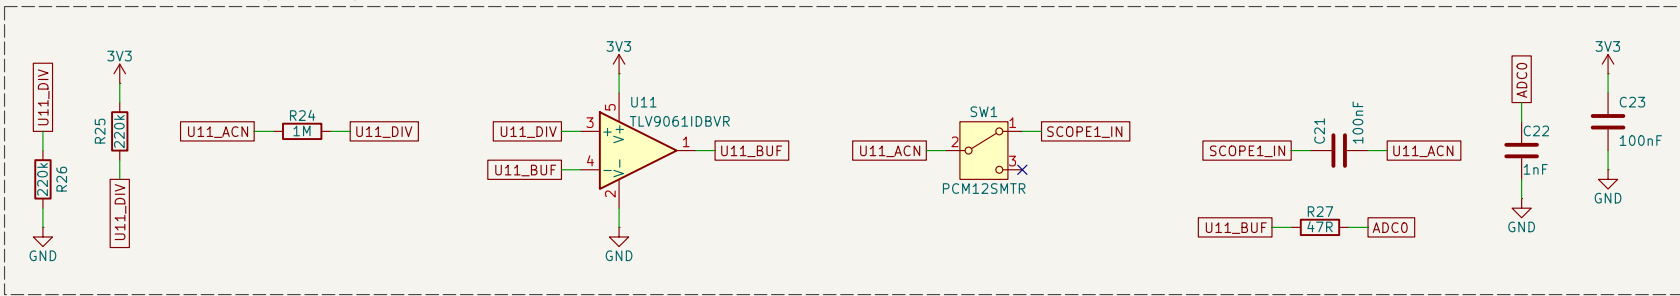


Scope CH2 -> ADC1 (GPIO27)

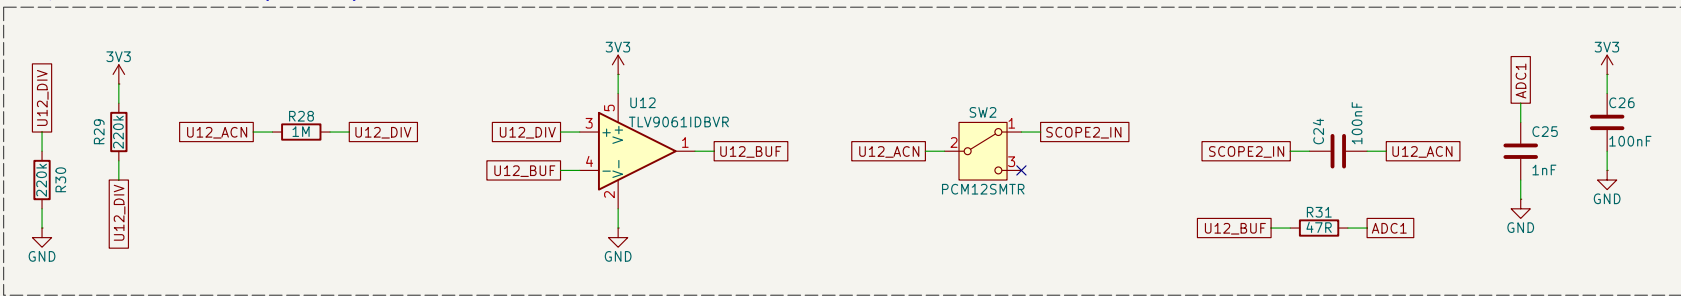


Scope inputs (CH1, GND, CH2, GND)

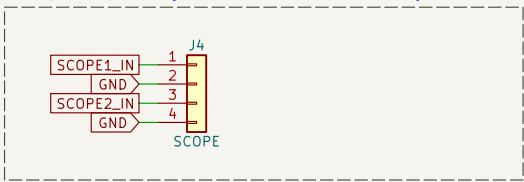


BOOTSEL button (QSPI_SS via 1k)



RESET button (RUN)




3V3 power LED

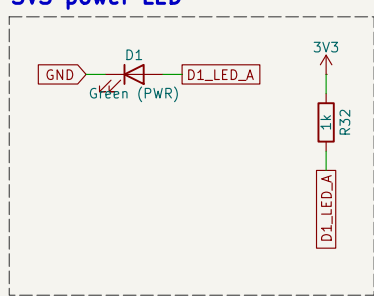


STAT LED (GPIO25)



ACT LED (GPIO24)

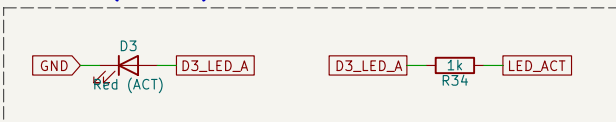

M3 mounting holes

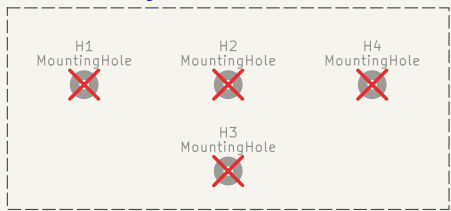

Power flags

