




STM32G431KBT6 + 8 MHz HSE

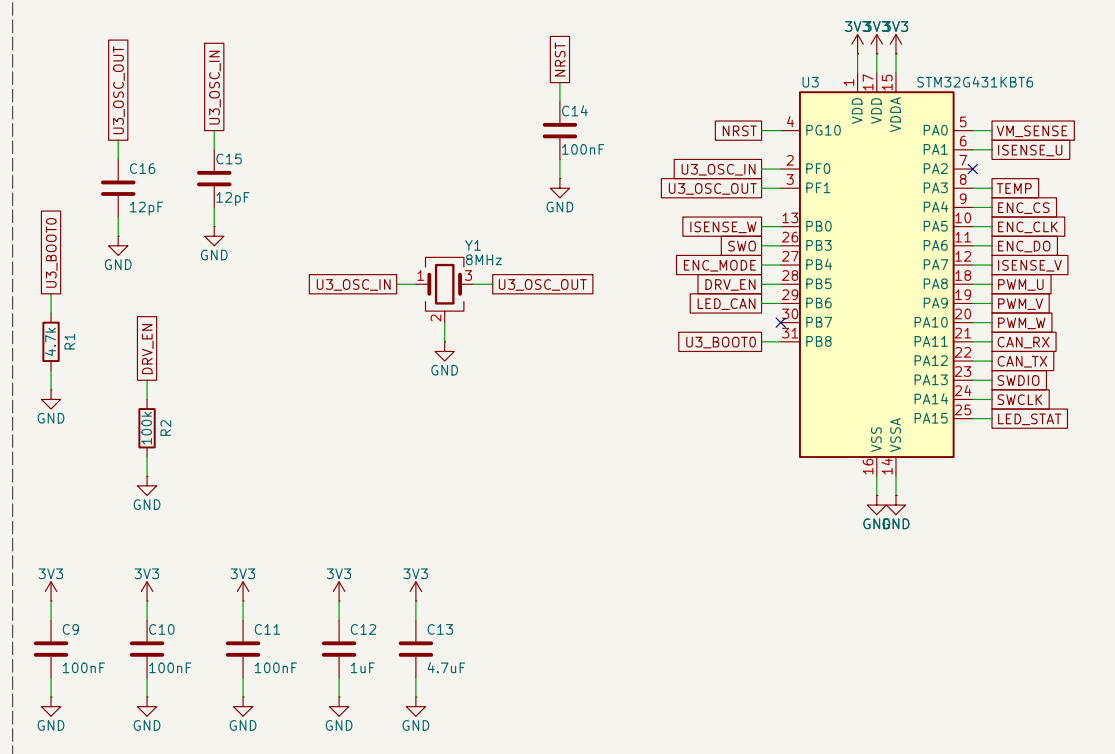


MT6701 encoder (SSI)

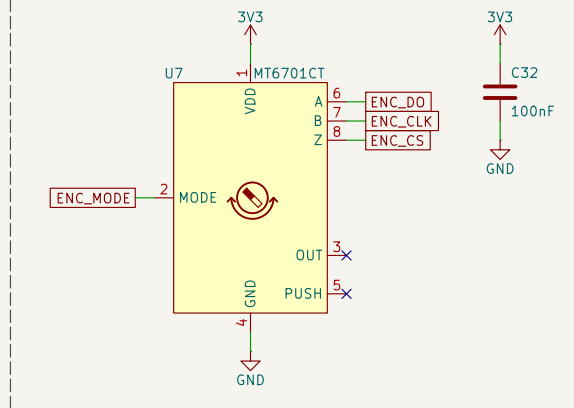


Phase U half-bridge

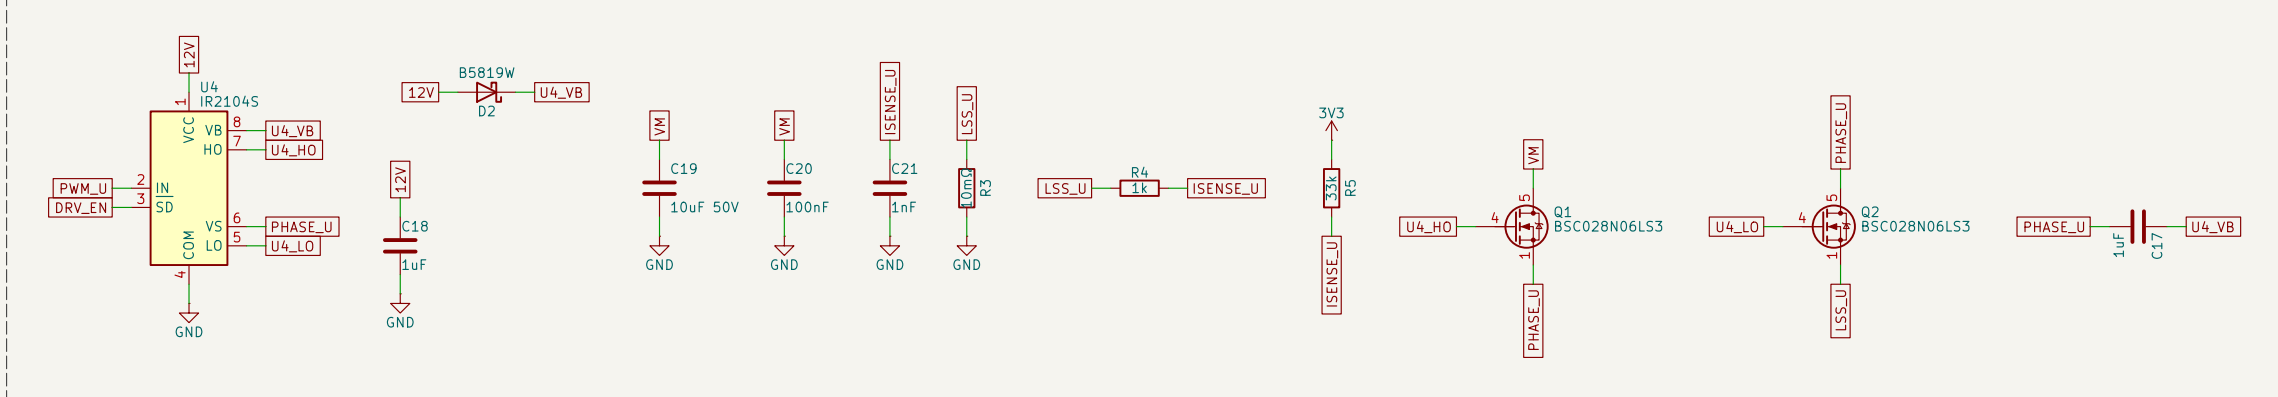


Phase V half-bridge

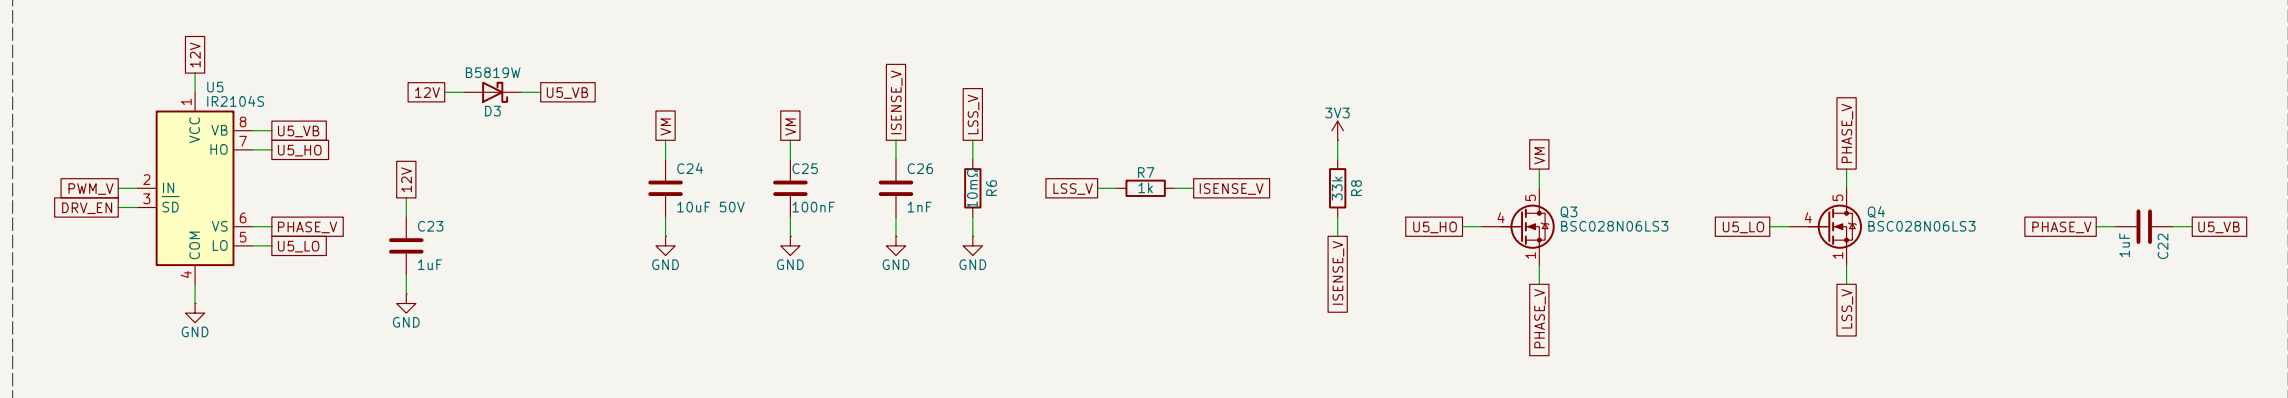


Phase W half-bridge

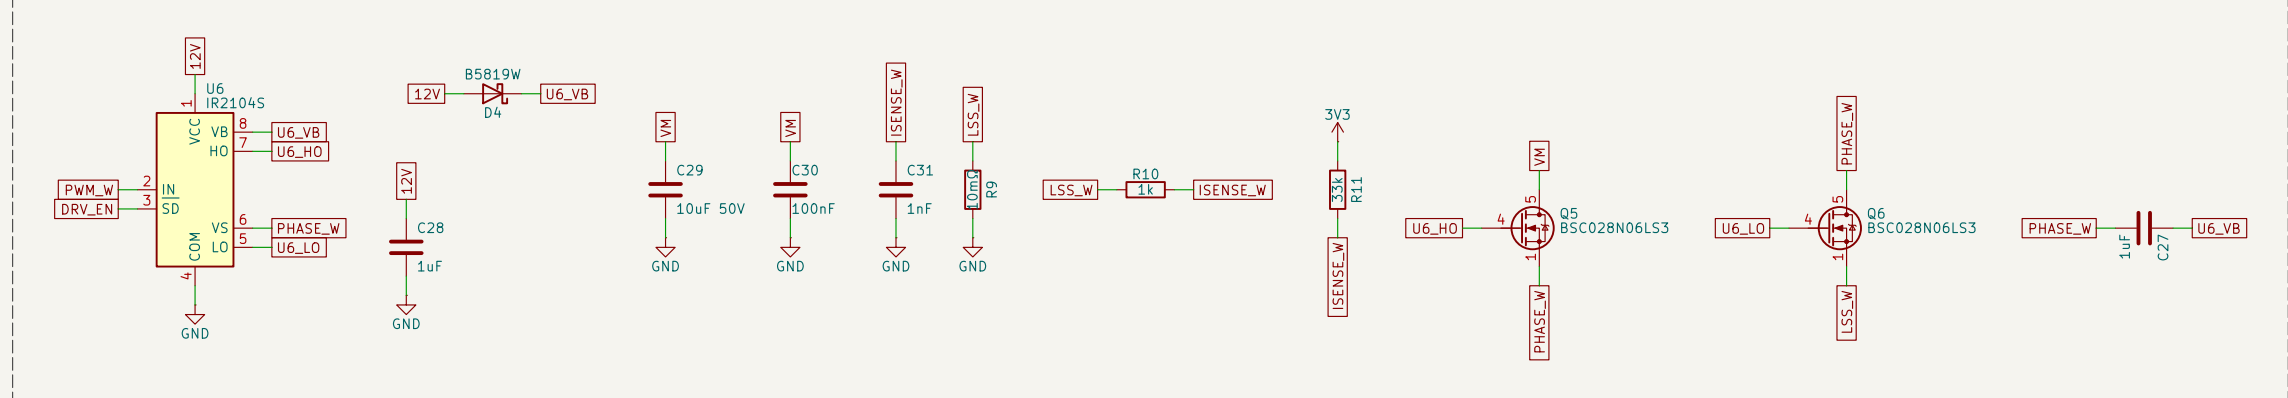


SWD (Cortex 10-pin, 1.27 mm)

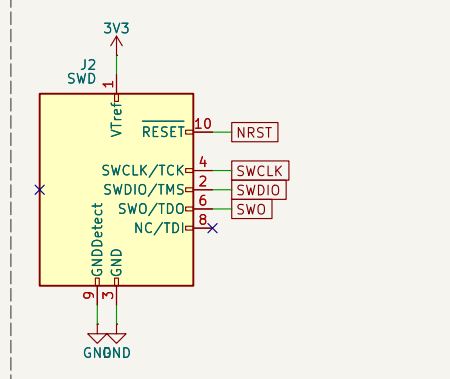


Bus voltage + NTC

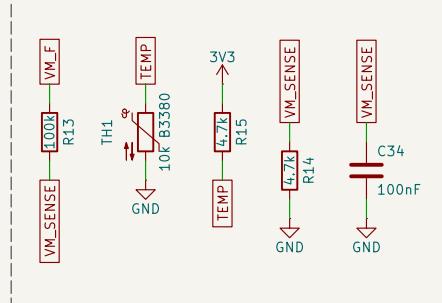


CAN FD (TCAN332G) + terminator

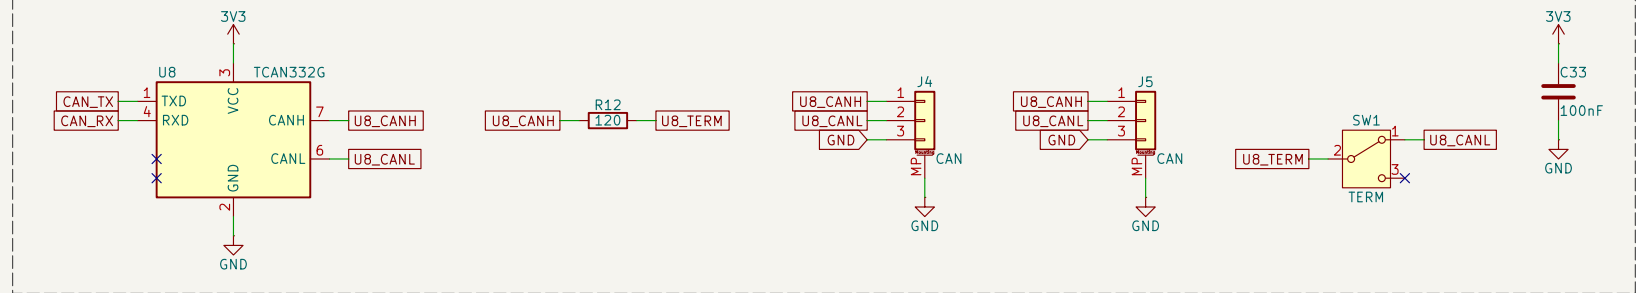


3V3 power LED

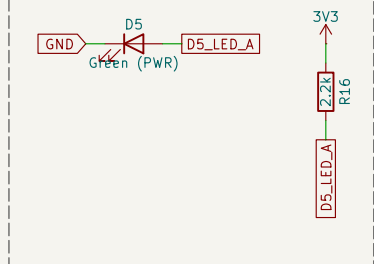


3.3 V buck (AP63203)

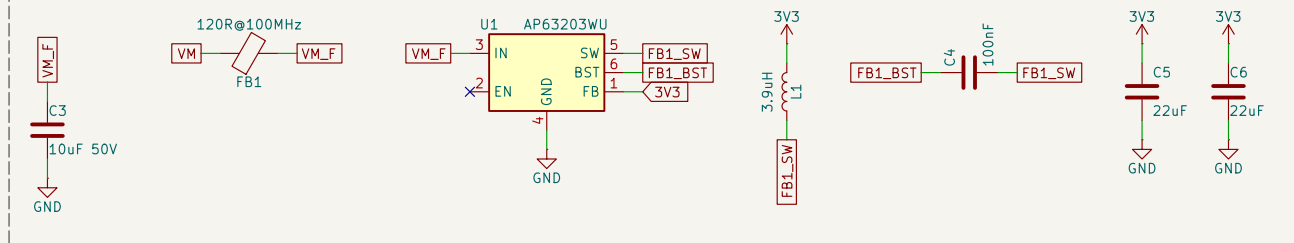


12 V gate-drive rail (78L12)

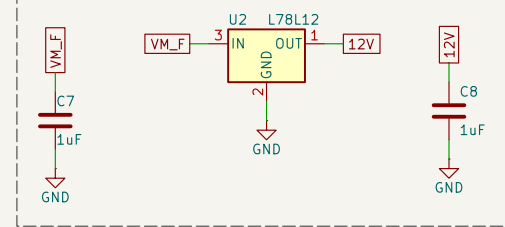


Bus input: terminal, TVS, bulk

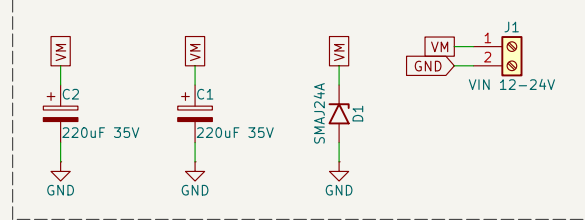


Power flags

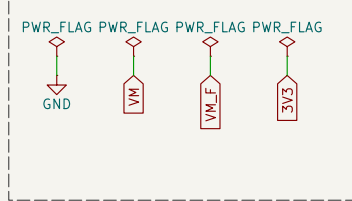

M3 mounting points



Motor terminal U / V / W

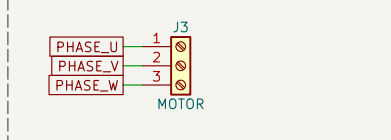

Status LED (PA15)



CAN LED (PB6)

