


Robot H-Homeed Drive Parts

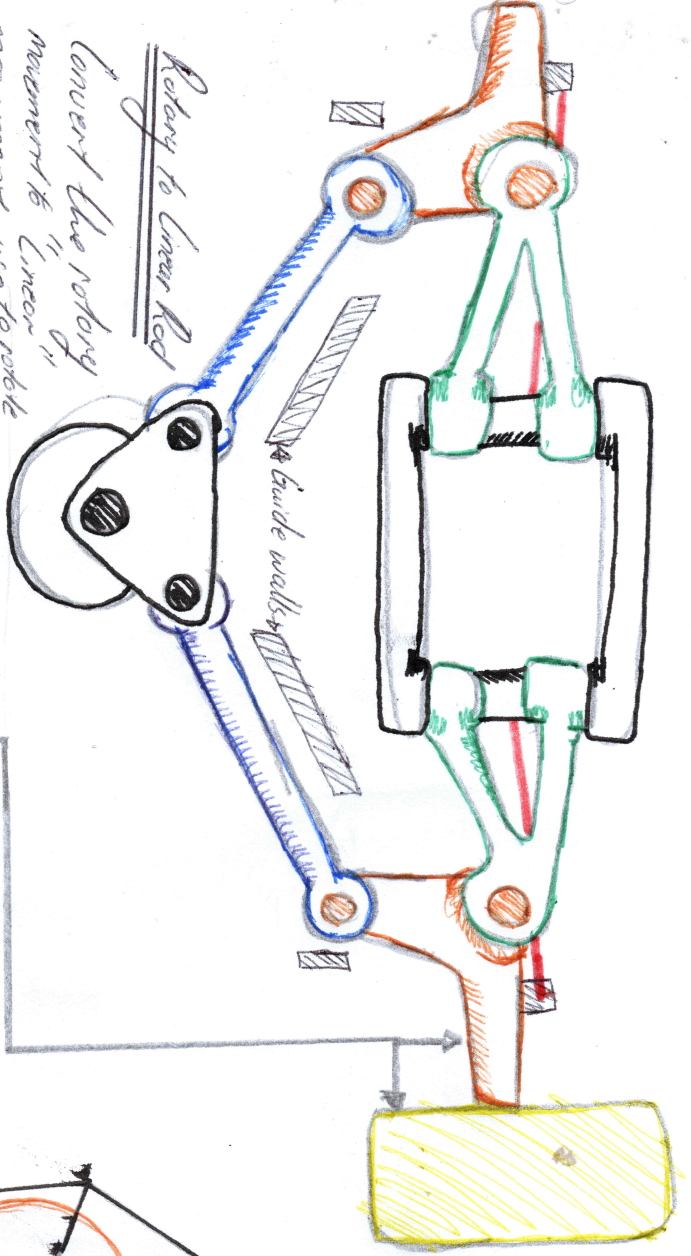

Rotary to linear Rod

Convert the rotary movement to "linear" movement use to rotate the axis of the main wheel axis. It could at some point be made of ~~plastic~~ ball.

Point to help adjust for the up and down motion as well as guide walls to limit the ~~can~~ max angle of rotation to between 25°-30°.

Then finally in red passive auto alignment from elastic bands


Main wheel axis

This is the portion directly connected to the wheel and has rotary movement along the x-y plane and linear along z

Dual motor setup

The dual motor will be the main driving force of the model connected in parallel to avoid the voltage drop of a series connection which would result in different rpm's. This will cost as in a page

though to to counteract that we will create a battery pack set up consisting of both parallel and series to state both voltage and current

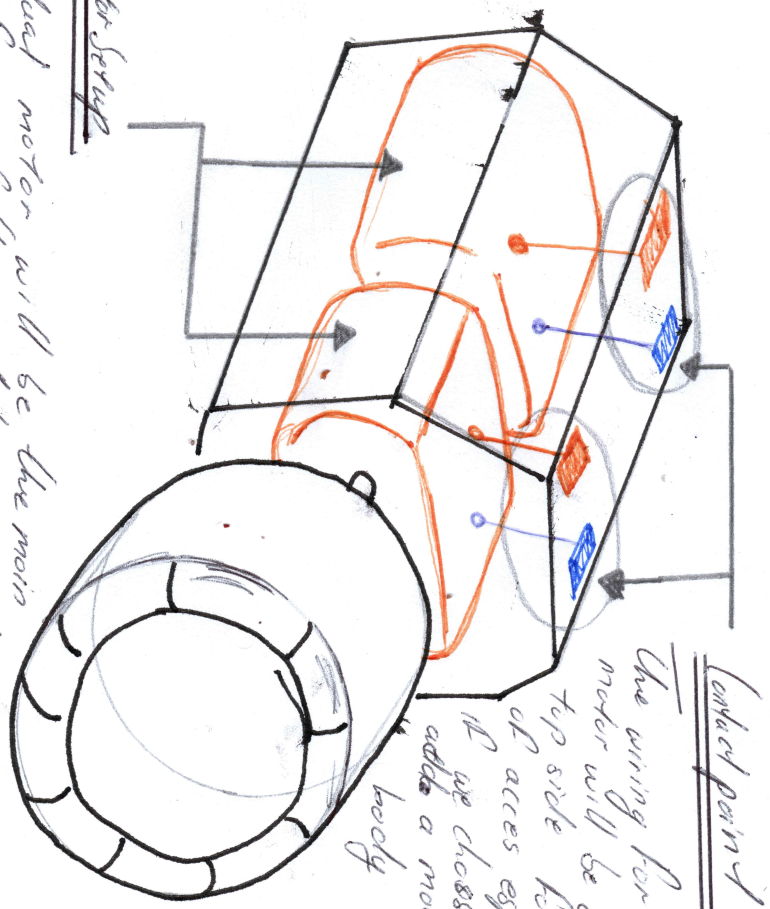

Contact point

The wiring for the dual motor will be on the top side for ease of access especially if we choose to add a model

body