

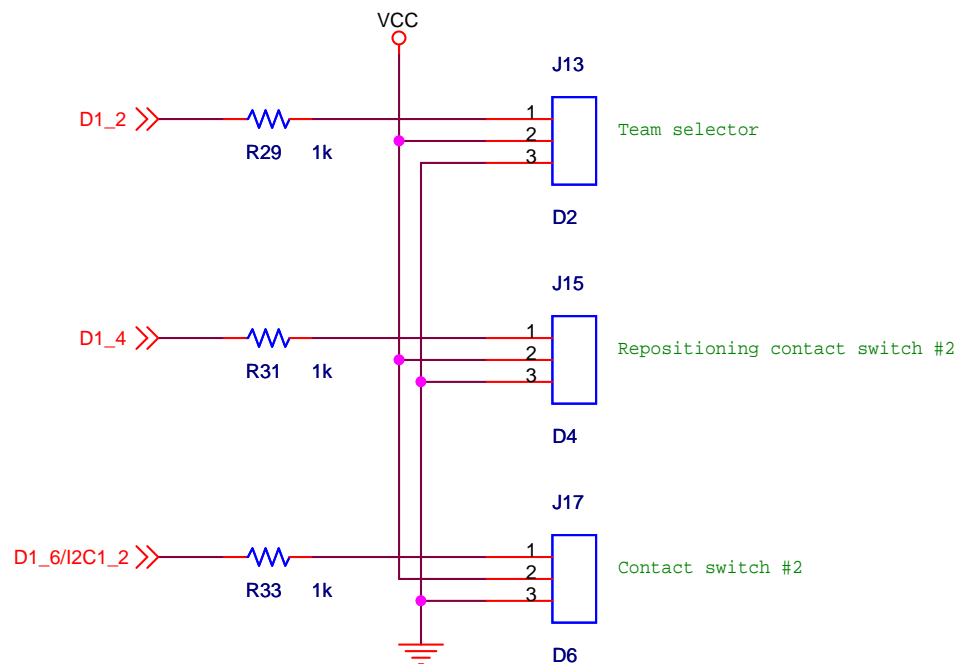






Title		
Sensor Actuator - Interface Analog		
Size A	Document Number <Doc>	Rev 1.0
Date:	Friday, April 29, 2011	Sheet 2 of 9

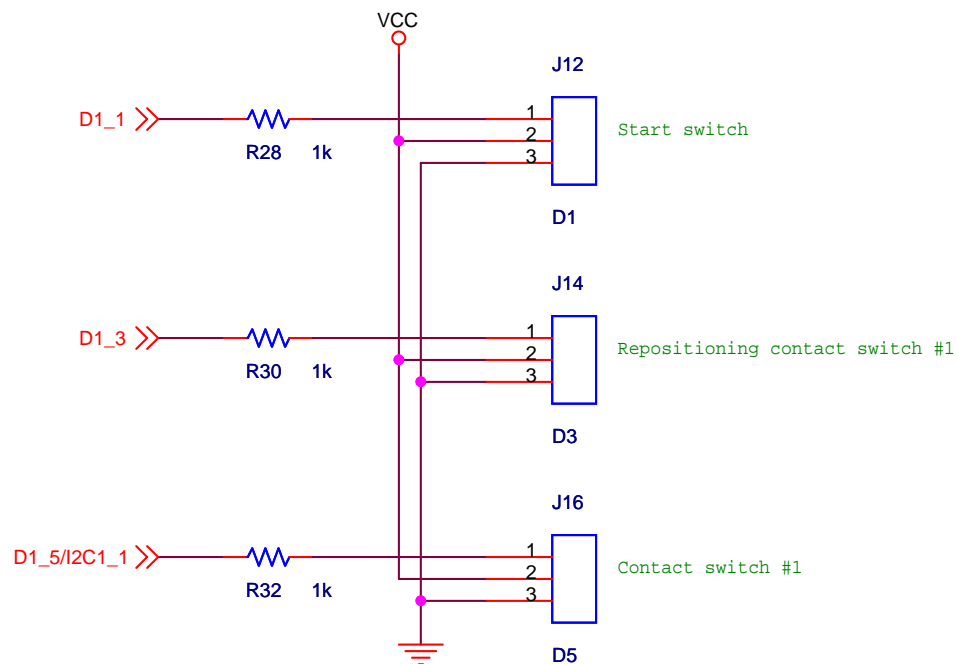




Notes:
 * Input voltage up to 5V is still possible
 * Analog input voltage are truncated to 3.3V
 * STM32 internal pull-up or pull-down can be used

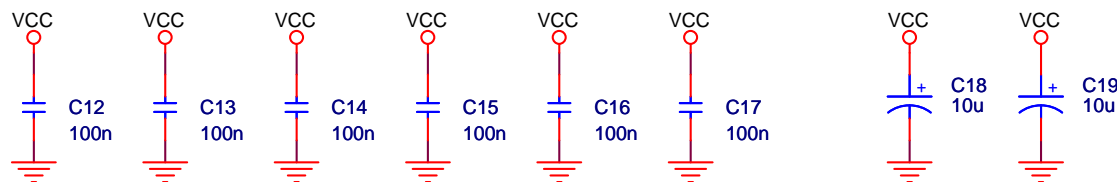






Title		
Sensor Actuator - Interface Digital #1		
Size A	Document Number <Doc>	Rev 1.0
Date:	Friday, April 29, 2011	Sheet 3 of 9

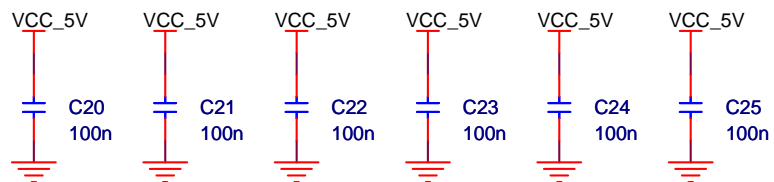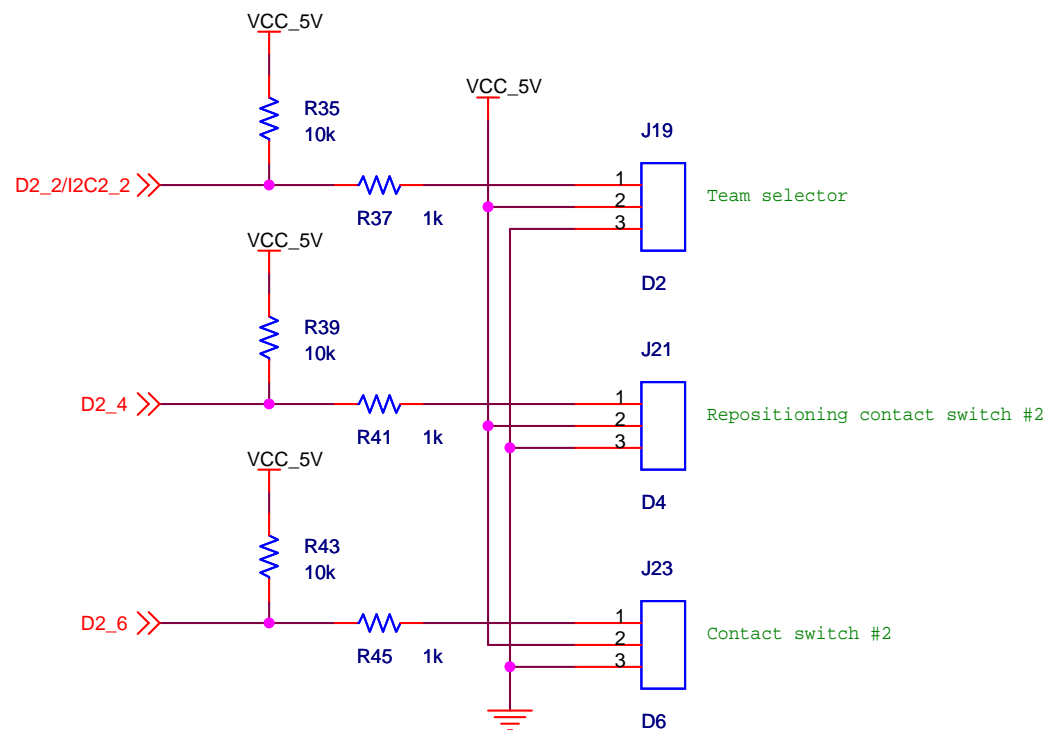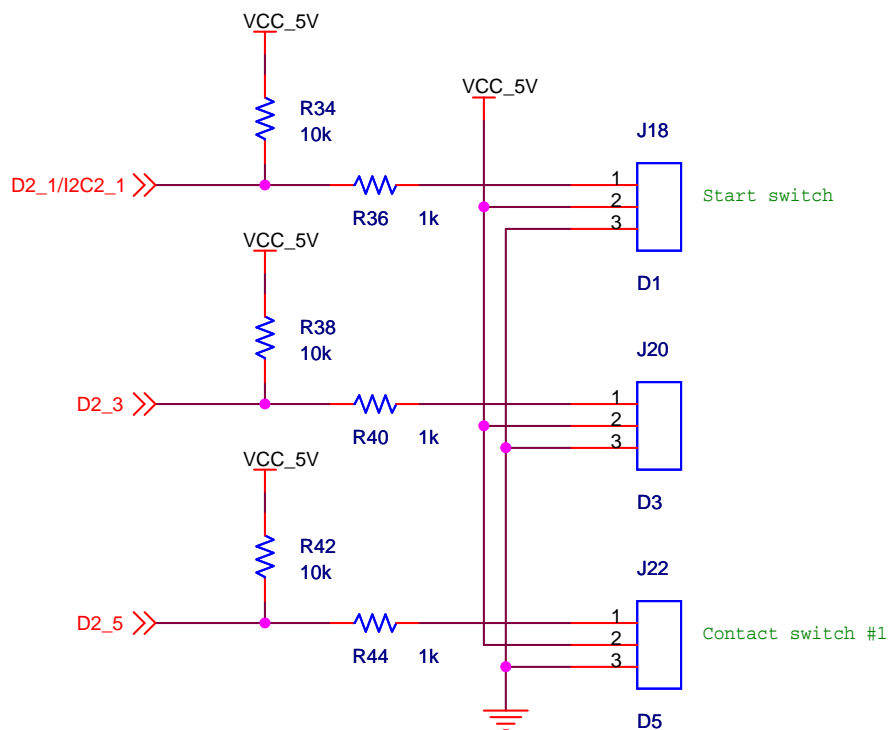



Title		
Sensor Actuator - Interface Digital #2		
Size A	Document Number <Doc>	Rev 1.0
Date:	Friday, April 29, 2011	Sheet 4 of 9

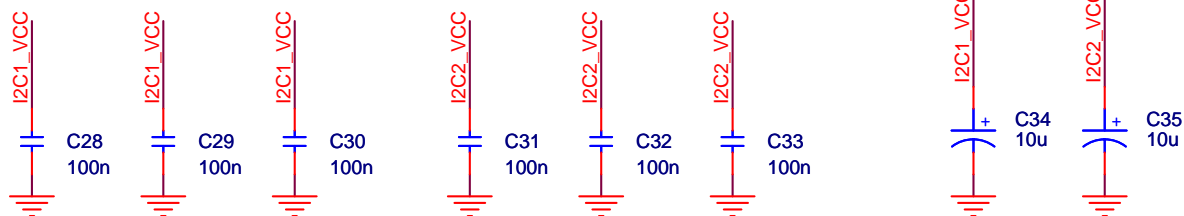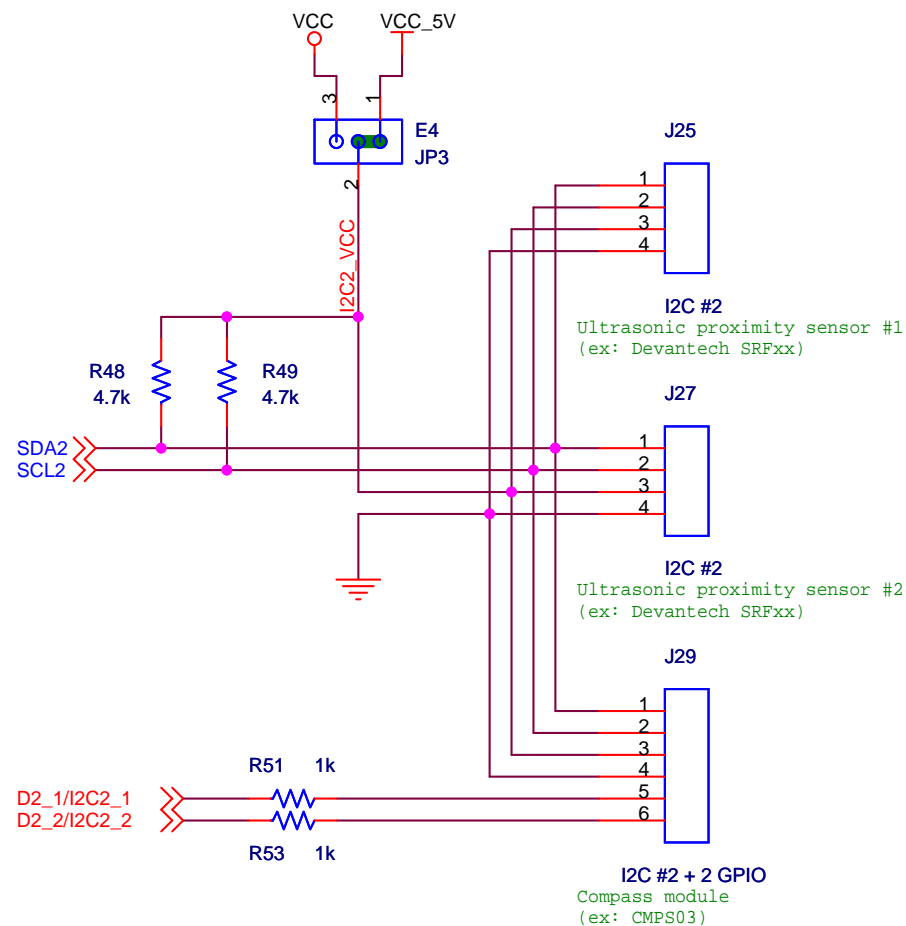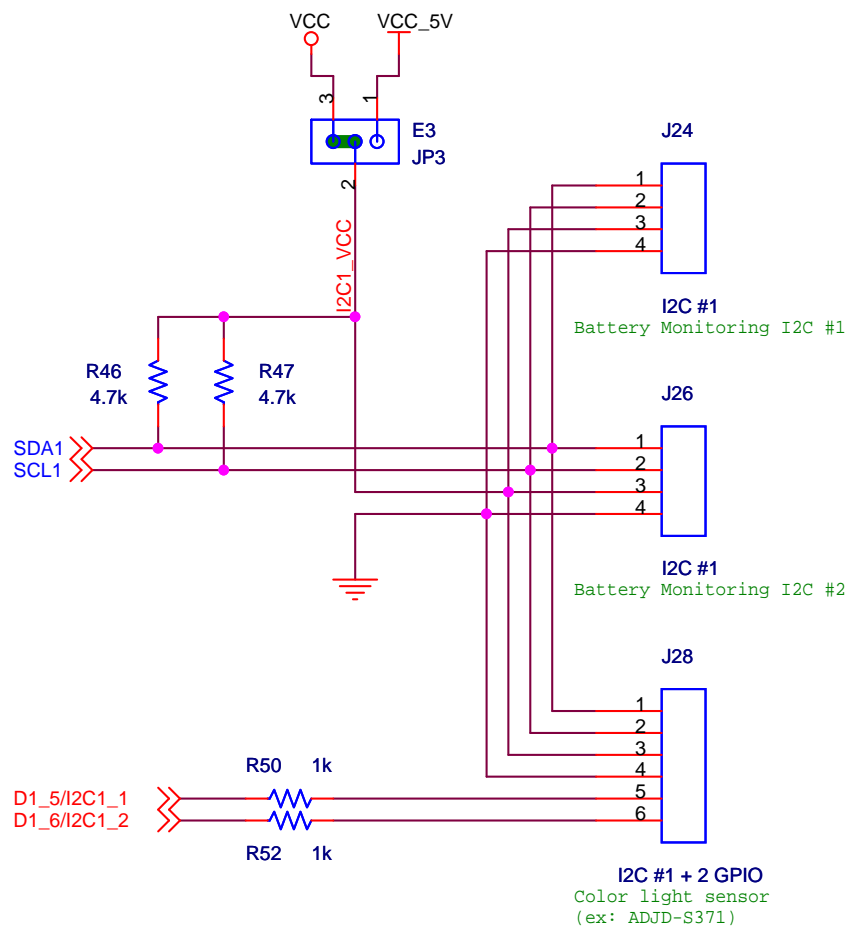

Title		
Sensor Actuator - Interface I2C		
Size A	Document Number <Doc>	Rev 1.0
Date:	Saturday, April 30, 2011	Sheet 5 of 9

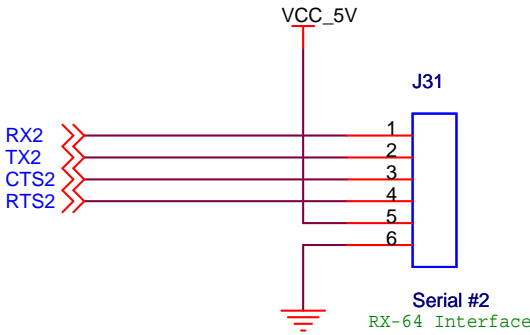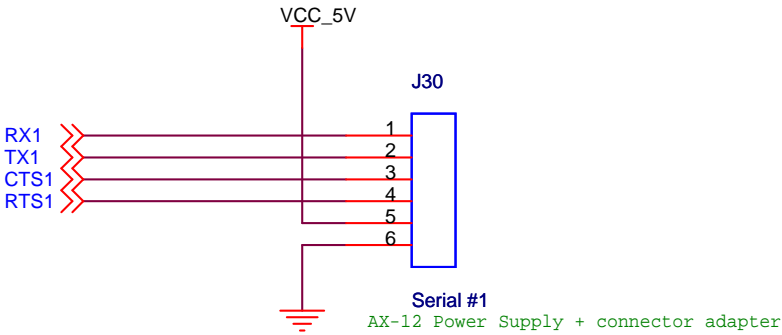




Title			
Sensor Actuator - Interface Serial			
Size	Document Number		Rev
A	<Doc>		1.0
Date:	Sunday, May 01, 2011		Sheet 6 of 9

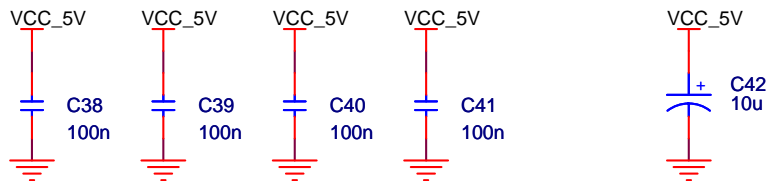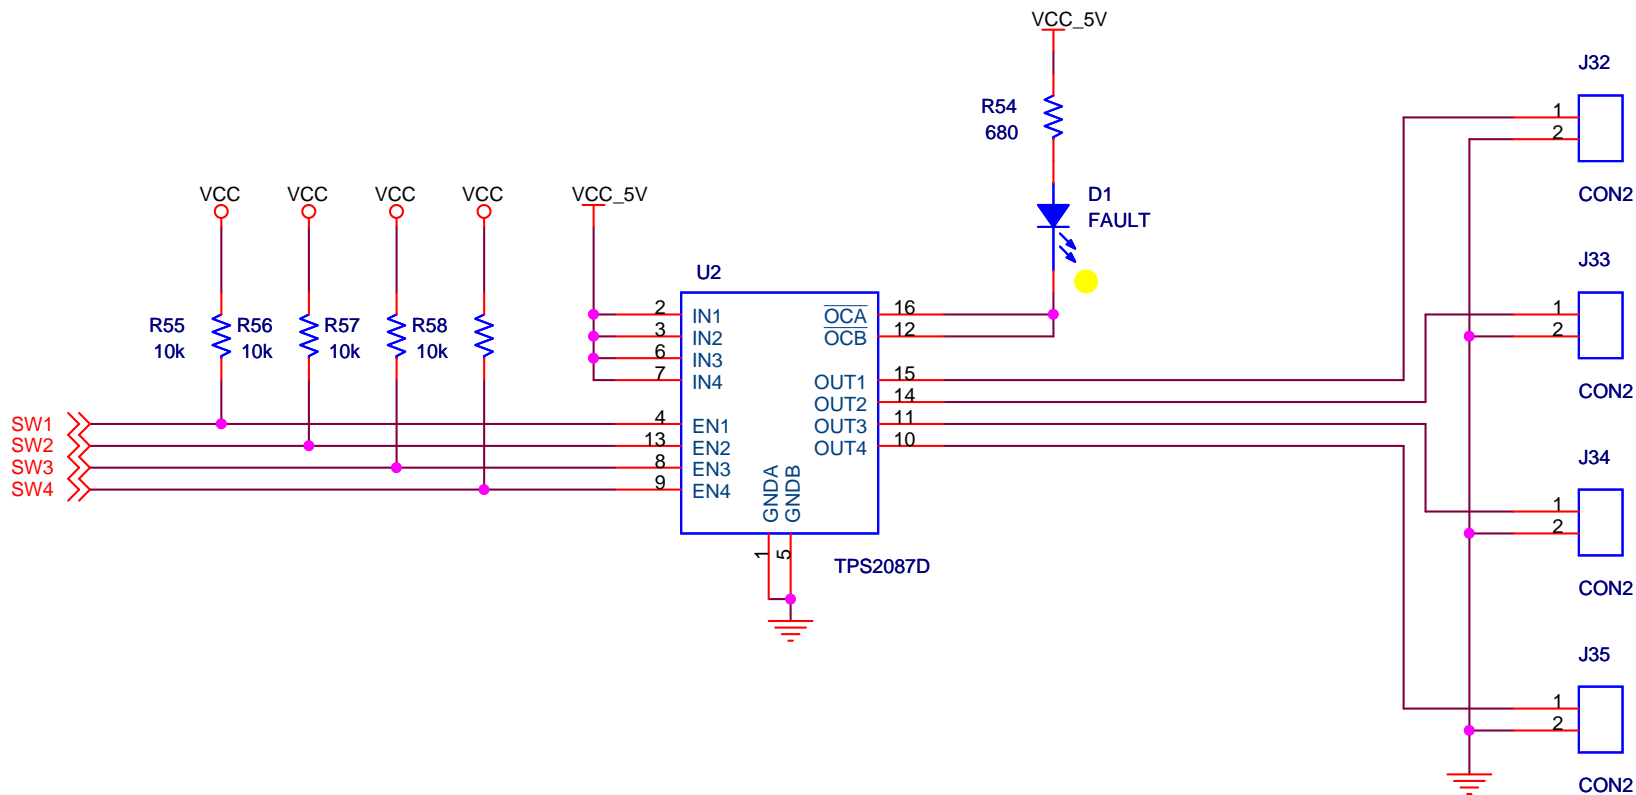

- Notes:
- * 500 mA continuous current
 - * Constant current mode for current limitation
 - * Thermal and short-circuit protection

Title		
Sensor Actuator - Interface Switch		
Size	Document Number	Rev
A	<Doc>	1.0
Date:	Friday, April 29, 2011	Sheet 7 of 9

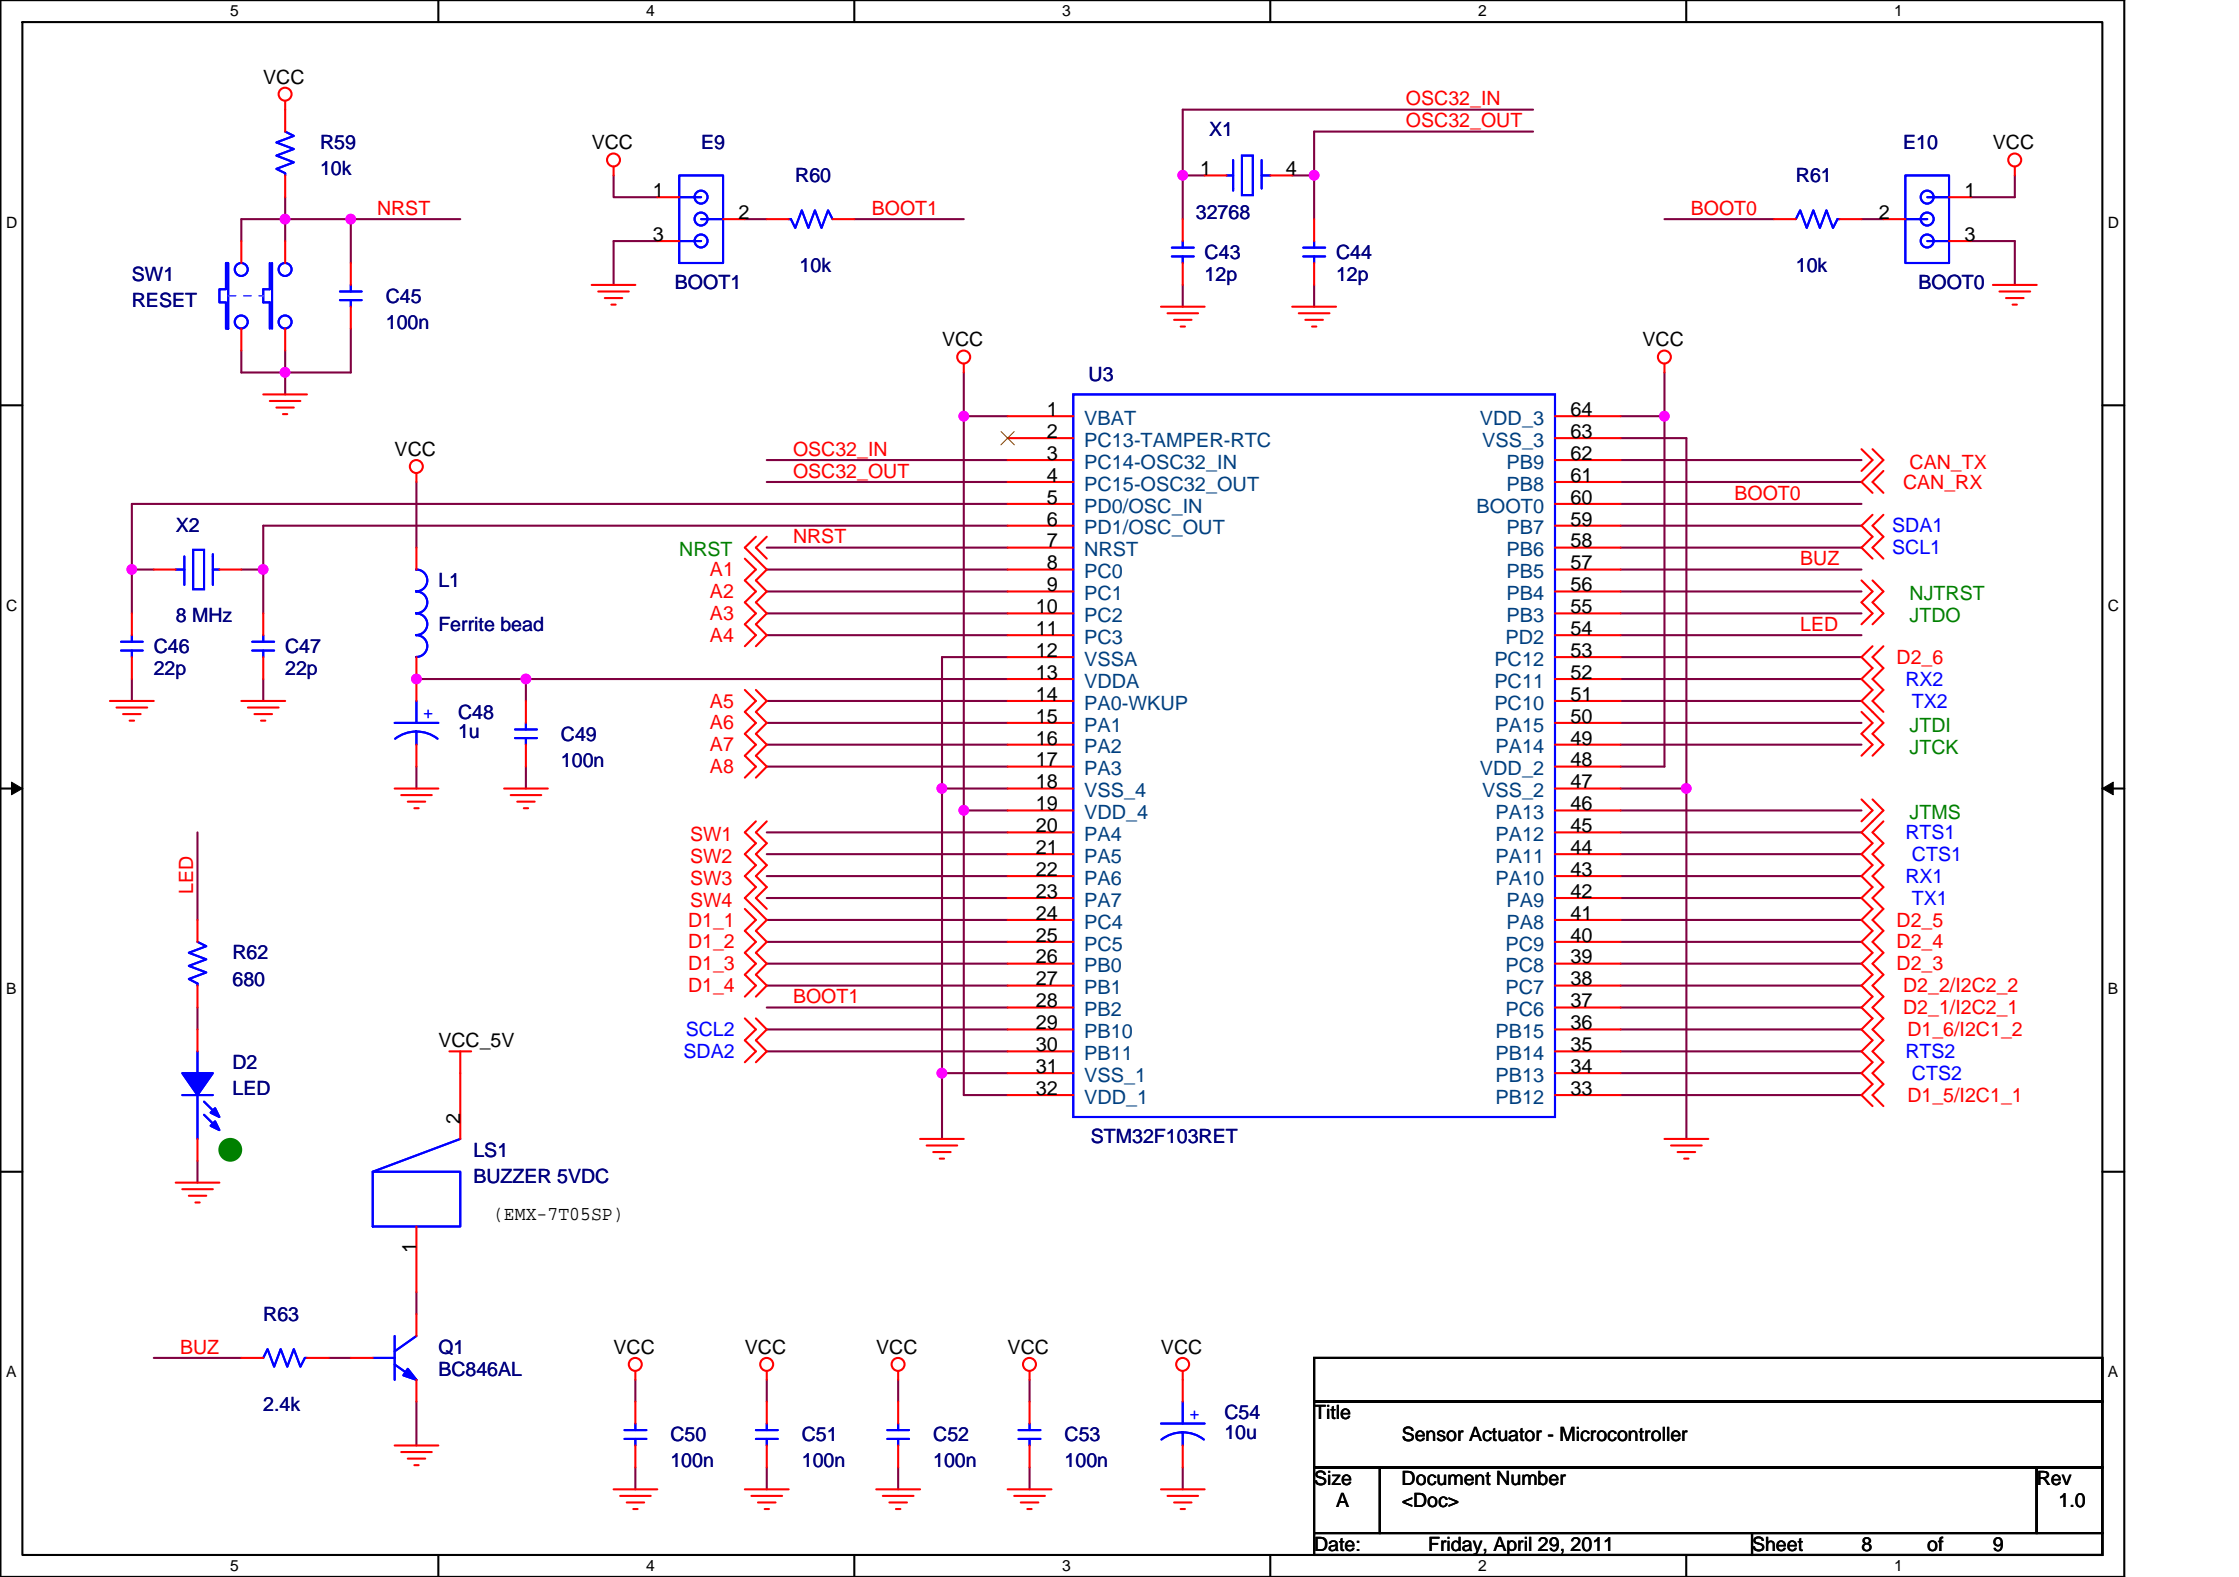

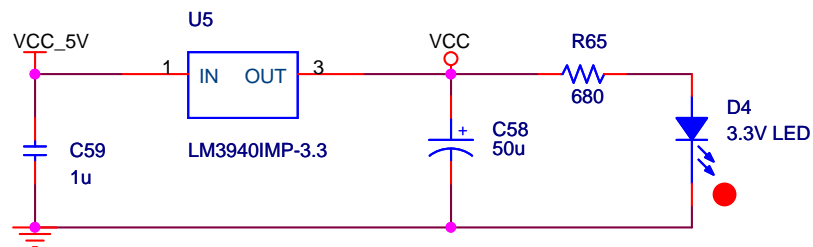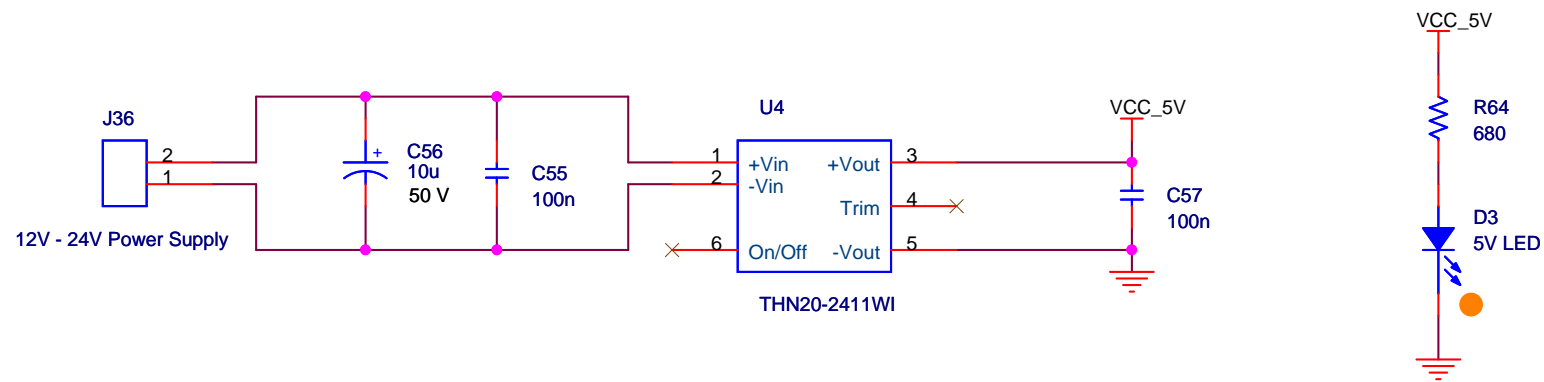

Title		
Sensor Actuator - Power Supply		
Size	Document Number	Rev
A	<Doc>	1.0
Date:	Friday, April 29, 2011	Sheet 9 of 9