


ESP32-S3-DevKitC-1

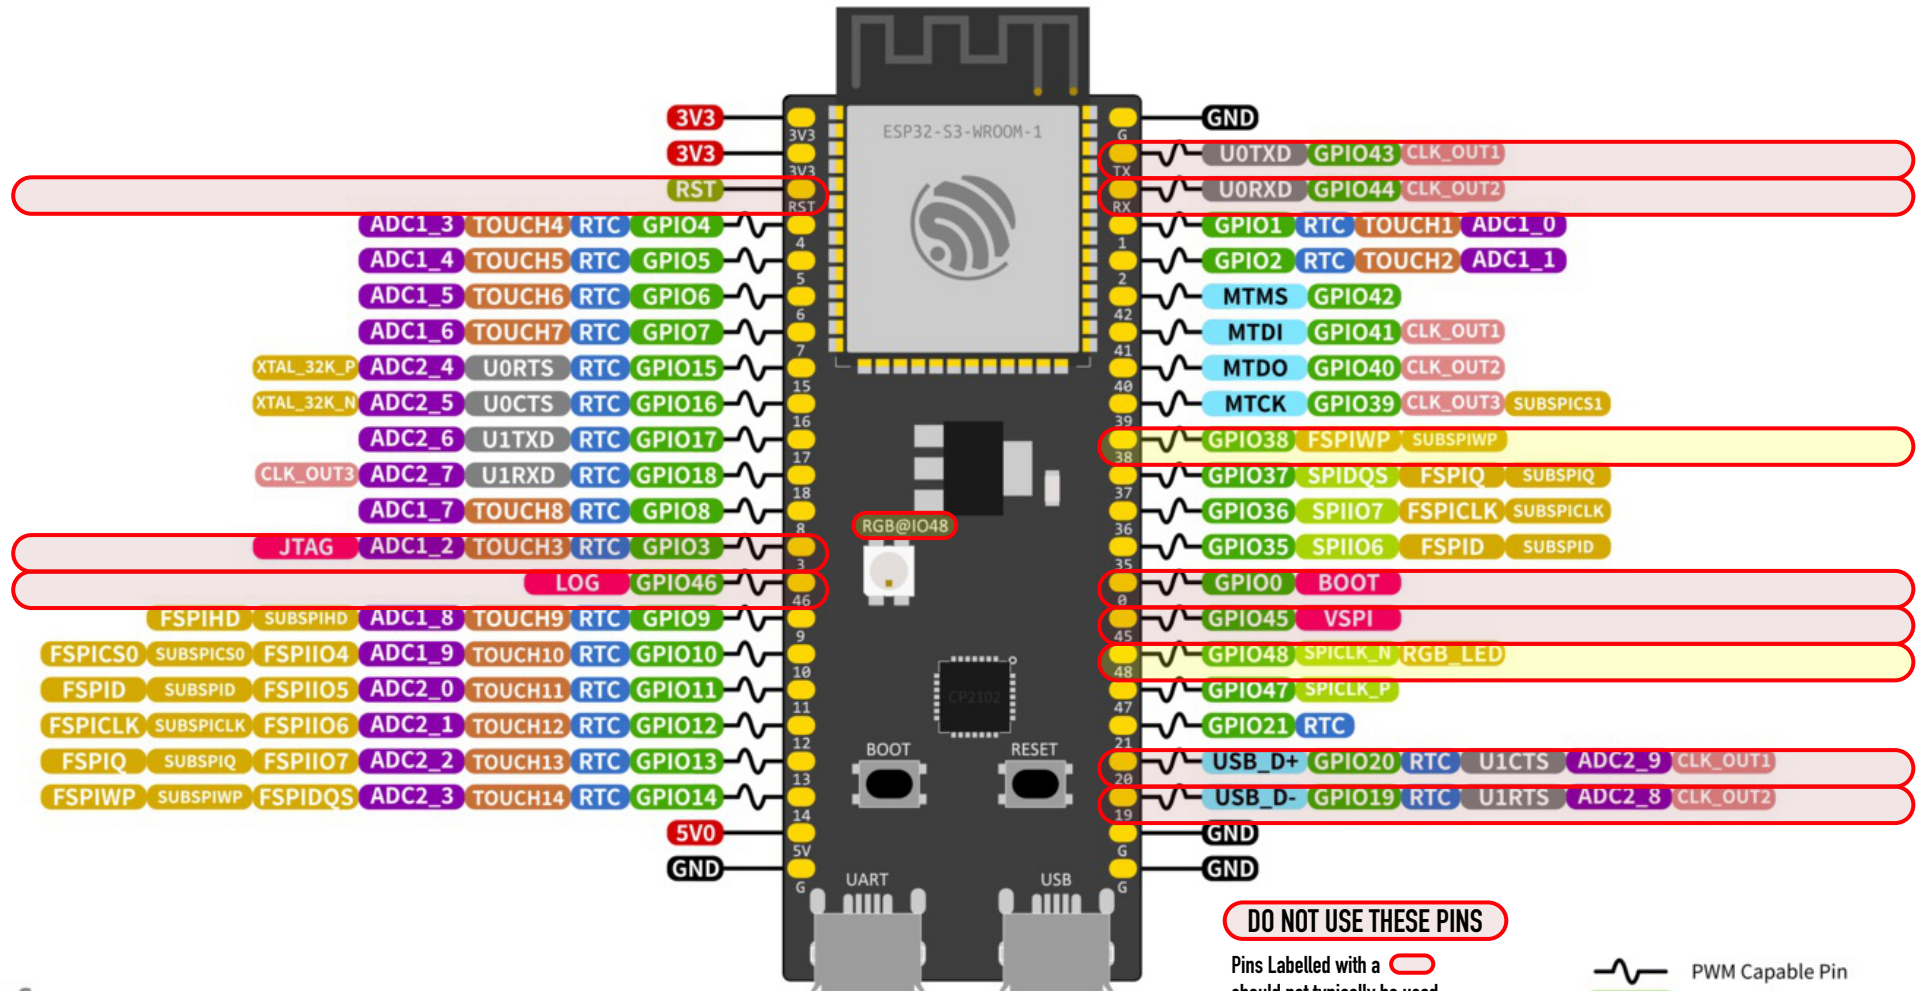

ESP32-S3 Specs

32-bit Xtensa® dual-core @240MHz
 Wi-Fi IEEE 802.11 b/g/n 2.4GHz + BLE 5 Mesh
 512 KB SRAM (16 KB SRAM in RTC)
 384 KB ROM
 45 GPIOs, 4x SPI, 3x UART, 2x I2C,
 14x Touch, 2x I2S, RMT, LED PWM, USB-OTG,
 TWAI®, 2x 12-bit ADC, 1x LCD interface, DVP

	PWM Capable Pin
GPIOX	GPIO Input and Output
JTAG/USB	JTAG for Debugging and USB
ADCX_CH	Analog-to-Digital Converter
TOUCHX	Touch Sensor Input Channel
OTHER	Other Related Functions
SERIAL	Serial for Debug/Programming
STRAP	Strapping Pin Functions
RTC	RTC Power Domain (VDD3P3_RTC)
GND	Ground
PWR	Power Rails (3V3 and 5V)
MISC	Miscellaneous/SPI functions
CLK_OUTx	Clock Output