HD27-X86 Series

27" Full HD PCAP Touch All-in-One with Intel x86 Windows / Linux

HD27-X86 integrates an industrial Intel x86 module (Celeron® J6412 / Core™ i5-8Gen / Core™ i7-10Gen) into the same 27-inch HD27 chassis. Pre-installed Windows 10 / 11 or Linux delivers a full PC experience with 10-point PCAP touch, gigabit Ethernet and dual-band WiFi. Designed for boardrooms, smart classrooms, retail kiosks and digital signage — full aluminum alloy frame, IP65 front surface and Mohs class 7 explosion-proof glass for 24/7 commercial use.

27"	Full HD	1000:1	PCAP 10-pt	IP65
Display	1920 × 1080	Contrast	Touch	Front Surface

KEY FEATURES

- 27-inch industrial LCD — 30,000-hour extended life
- Full aluminum alloy frame — premium chassis
- Mohs class 7 explosion-proof glass
- 24/7 commercial use — industrial-grade power supply
- Built-in Intel x86 — Windows 10 / 11 / Linux pre-installed
- Industry-leading ultra-narrow screen bezel
- Surface IP65 waterproof — front panel
- PCAP 10-point touch — 200 Hz / 4096×4096 accuracy
- Mounting: Wall / Desktop stand / Embedded
- Total power consumption: < 75 W

ENT Group Co., Ltd. | 70/5 Moo 4, Metro Biztown, Chaengwattana 2, Pak Kret, Nonthaburi 11120, Thailand
Tel: 02-045-6104, 095-739-1053 | Sales@entgroup.co.th | www.entgroup.co.th | Tax ID: 0135558013167

THREE CONFIGURATIONS

HD27 — X86 All-in-One

Windows / Linux integrated

27-inch PCAP touch with built-in Intel x86 module. Choose Celeron J6412, Core i5-8Gen or Core i7-10Gen — pre-installed Windows 10 / 11 or Linux for instant deployment.

- Intel: J6412 / i5-8Gen / i7-10Gen
- RAM 4–16 GB · mSATA 128–512 GB
- Gigabit LAN + dual-band WiFi
- Power consumption < 75 W

Sister variants of the HD27 chassis

Same 27" panel, frame and mounting — different compute

- HD27-Monitor: Display only — pair with any external PC via HDMI/VGA + USB Touch
- HD27-X86: Intel J6412 / i5-8Gen / i7-10Gen with Windows 10 / 11 / Linux
- HD27-ARM: Rockchip RK3568 / RK3288 / RK3588 with Android 9 / 11 / 12

Same panel, frame and mounting options. Contact ENT Group sales for variant comparison and project-based recommendations.

TARGET INSTALLATIONS

POS Counter · Self-Service Kiosk · Reception Desk · Smart Office · Retail Display · Hospital Check-in · Library Terminal · Conference Room

ENT Group Co., Ltd. | 70/5 Moo 4, Metro Biztown, Chaengwattana 2, Pak Kret, Nonthaburi 11120, Thailand
Tel: 02-045-6104, 095-739-1053 | Sales@entgroup.co.th | www.entgroup.co.th | Tax ID: 0135558013167

TECHNICAL SPECIFICATIONS

Configuration

PC System	Intel® Celeron® J6412 / Core™ i5-8Gen / Core™ i7-10Gen
GPU	Intel® UHD Graphics / Iris® Plus 645 / UHD Graphics
Memory	DDR4-2666 SODIMM 4 GB / 8 GB / 16 GB
Storage	mSATA 128 GB / 256 GB / 512 GB
Audio	HD Audio: ALC269
Pre-installed OS	Windows 10 / 11 or Linux
Network	10/100/1000M RJ45 + 802.11 a/b/g/n/ac WiFi

LCD Panel

Display Size	27 inches
Resolution	1920 × 1080
Aspect Ratio	16 : 9
Active Display Area	599 × 337.5 mm
Colors	16.7 M
Brightness	250 cd/m²
Contrast Ratio	1000 : 1
Viewing Angle (H/V)	178° / 178°
Backlight Lifetime	LED 30,000 hours
Refresh Rate	60 Hz

Touch Panel

Technology	PCAP (Projected Capacitive)
Response Time	< 5 ms
Touch Points	10-point standard
Touch Recognition	> 1.5 mm
Scanning Frequency	200 Hz
Scanning Accuracy	4096 × 4096
Working Voltage / Current	DC +5 V ± 5% / 180 mA
Surface Hardness	Mohs class 7 explosion-proof glass

ENVIRONMENT, POWER & DIMENSIONS

Environment & Power

Operating Temperature	0 °C to 50 °C
Operating Humidity	0% to 90%
Storage Temperature	0 °C to 60 °C
Storage Humidity	0% to 65%
Power Input	110–240 V AC, 50/60 Hz
Power Output	DC 12 V / 7 A
Standby Power	≤ 0.5 W
Overall Power Consumption	< 75 W

Dimensions & Weight

Machine Dimensions (W×H×T)	635.5 × 379 × 40.4 mm
Package Dimensions (W×H×T)	790 × 545 × 185 mm
Net Weight	6.5 kg
Gross Weight	10.34 kg
Surface Protection	IP65 (front)
Mounting	Wall mount / Desktop stand / Embedded

I/O Ports

- HDMI out × 1
- RJ45 LAN × 1
- Audio in × 1
- Power Socket × 1
- VGA × 1
- USB × 4
- Audio out × 1
- Optional: USB / RS232 / RS485

RECOMMENDED APPLICATIONS

Application	Description
POS & Counter	Restaurant POS, queue terminals, ticketing and check-in counters.
Self-Service Kiosk	Hospital queue, library check-in, government counters.
Retail & Showroom	Interactive product display and order-taking terminals.
Smart Office	Meeting room booking, attendance and access-control panels.
Industrial HMI	Operator interface, workshop dashboards and control terminals.

ENT Group Co., Ltd. | 70/5 Moo 4, Metro Biztown, Chaengwattana 2, Pak Kret, Nonthaburi 11120, Thailand
Tel: 02-045-6104, 095-739-1053 | Sales@entgroup.co.th | www.entgroup.co.th | Tax ID: 0135558013167

CONNECT & ORDER

How to order — B2B Quotation Workflow. ENT Group operates as a B2B procurement platform. Add items to your cart on entgroup.co.th, our sales team will review your request and respond with a formal quotation (PDF). This is not an online checkout — pricing, lead time and delivery terms are tailored to each project.

View Product Page

Scan to view HD27 Series — full specs & accessories
entgroup.co.th/products/displays-27/hd27

Add LINE Official

Chat with our sales team for quotations & support
LINE ID: @entgroup

Get a Tailored Quotation

Scan either QR code to connect with ENT Group instantly. Our B2B sales team will prepare a quotation tailored to your project — including volume pricing, customization, installation and warranty terms.

Tel 02-045-6104, 095-739-1053
Email Sales@entgroup.co.th
Web www.entgroup.co.th

VIEWS & DIMENSIONS — Mechanical Drawing

Official mechanical drawing extracted from the TouchWo HD27 spec sheet (panel manufacturer reference). All measurements in millimetres (mm). Front view shows active area 599 × 337.5 mm and outer chassis 635.5 × 379 mm. Rear view shows VESA-style 4-M4 mounting holes pattern (267.3 × 138.5 / 100 mm).

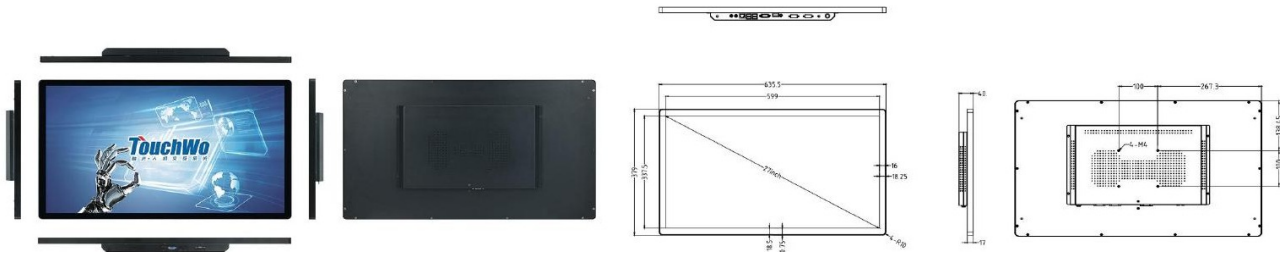

Dimension	Value
Outer Chassis (W × H × D)	635.5 × 379 × 40.4 mm
Active Display Area (W × H)	599 × 337.5 mm
Bezel Width (Top / Bottom)	18.25 / 26.75 mm
Bezel Width (Left / Right)	18.5 / 18.5 mm
VESA Mount Pattern (rear)	4-M4 · 267.3 × 138.5 mm (centre 100 mm offset)
Net Weight / Gross Weight	6.5 kg / 10.34 kg
Package Dimensions (W × H × D)	790 × 545 × 185 mm