คอมพิวเตอร์เกรดอุตสาหกรรม

K3-F17H

Industrial Mini PC

Key Benefit

- Industrial Automation - COM ports + Built-in pins
- Network Infrastructure - Dual Gigabit LAN + 4G backup
- Security Systems - Multiple connectivity + rugged design
- OEM Integration - 20+ built-in pins สำหรับ custom applications
- Remote Monitoring - 4G/WiFi6 + Industrial grade reliability
- Edge Computing - High connectivity + industrial durability
- Digital Signage - 4K display + remote management capability

Specification

CPU Model	Intel Core i3 5005U
CPU Frequency	2.0GHz
Cores/Threads	2 Cores / 4 Threads
Cache	3 MB Cache
TDP	15W
Architecture	Broadwell (5th Generation)
Hyper-Threading	Supported
Intel Virtualization	Support VT-x, VT-d
MEMORY & STORAGE	
Memory Type	DDR3L
Memory Slots	2× DDR3L slots
Maximum Memory	16GB
Primary Storage	SSD (M.2 M KEY 2280 SATA)
Secondary Storage	Optional SSD/HDD (2.5-inch hard drive expansion)
GRAPHICS & DISPLAY	
Graphics	Intel HD Graphics 5500
Display Support	Dual Display (HDMI + VGA)
Display Modes	Duplicate mode, Extend mode
VGA Resolution	Max 1920×1080@60Hz
HDMI Resolution	Max 4096×2304@30Hz

AUDIO SYSTEM	
Audio Controller	HD Audio Realtek ALC 897
Audio Port	1× 2-in-1 Audio Port (Headphone/Microphone)
NETWORK & CONNECTIVITY	
Ethernet	2× Gigabit LAN (10/100/1000Mbps Adaptive, RTL8111F)
Wireless Module	M.2 E KEY 2230 socket (WiFi + Bluetooth, WiFi6 support)
Cellular Module	M.2 B KEY 3042/3052 slot (3G/4G module support)
SIM Card	SIM Card Slot included
I/O PORTS	
USB 2.0	4× USB 2.0 ports
USB 3.0	2× USB 3.0 ports
USB Type-C	1× USB Type-C
Display Outputs	1× HDMI, 1× VGA
Network	2× Ethernet (Dual Gigabit LAN)
Legacy Ports	1× PS2, 1× RJ11
Power	1× DC Power Input
Audio	1× 2-in-1 Audio Port
Industrial COM	2× DB9 COM (RS232/485), 2× DB9 COM (0/5/9/12V switch)
Other	1× CLS (CMOS Clear)
Total Ports	18+ External Ports

BUILT-IN EXPANSION SOCKETS	
Display Control	1× Screen backlight power supply pin, 1× LVDS
USB Expansion	2× USB 2.0 pin
Security	1× TPM pin
Audio Expansion	1× Speaker pin
Serial Expansion	2× COM signal switch pin, 2× COM voltage switch pin
Storage Expansion	1× SATA and power supply
System Control	1× F_PANEL, 1× 20PIN GPIO
Power Management	1× JSW1 pin (auto power-on), 1× JBAT1 pin, 1× CPU_FAN
Total Built-in Pins	20+ Expansion Pins for OEM Integration
BIOS & FEATURES	
Boot Options	PXE, Auto-power-on, Wake-on-LAN, Scheduled Boot, Interval Boot
Virtualization	Intel VT-x, VT-d support
OPERATING SYSTEM	
OS Support	Windows 7/8/10, Linux
PHYSICAL SPECIFICATIONS	
Dimensions	L 197.4mm × W 126.3mm × H 47.5mm
Weight (Net)	1.2 kg
Weight (Gross)	1.8 kg
Construction	Aluminum alloy shell with ice fin heat dissipation design

Heat Dissipation	Passive cooling (natural heat dissipation)
Design Style	Industrial style, classic and beautiful
Mounting	Dedicated bracket, VESA bracket, DIN bracket support
POWER & ENVIRONMENT	
Power Input	DC 12V - 5A
Working Temperature	-10°C to 60°C
Working Humidity	5% - 95% (No Condensation)
Storage Temperature	-20°C to 70°C
Storage Humidity	5% - 95% (No Condensation)
Static Electricity	Contact discharge 2K, Air discharge 6K
PACKAGE CONTENTS	
Packaging	Kraft paper color box + Anti-fall corrugated outer box
Power Accessories	Power Adapter × 1, Power Cable × 1
Mounting Hardware	Bracket × 1, Screws × 1
Documentation	User Manual × 1, QA Card × 1

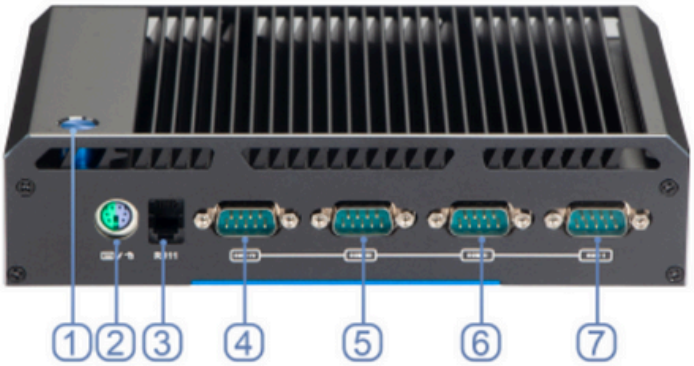

I/O Port

01 Power ON/OFF
02 PS2
03 RJ11
04 COM (RS232/485)
05 COM (RS232/485)
06 COM (0/5/9/12V)
07 COM (0/5/9/12V)
08 AUDIO (2-in-1 audioport)
09 USB2.0*4
10 Ethernet*2
11 USB3.0*2
12 HDMI
13 VGA
14 DC 12V