มินิคอมพิวเตอร์

K7-N12

Key Benefit

- Video Editing & Content Creation - CPU แรง + RAM
- CAD/3D Modeling - ประสิทธิภาพสูง + Dual Display
- Server/Virtualization - 12 threads + 32GB RAM
- Digital Signage ระดับสูง - 4K + Full metal casing
- Edge Computing - ขยายได้หลากหลาย + 4G connectivity
- Workstation ทดแทน - ประสิทธิภาพเทียบ Desktop

Specification

CPU Model	Intel Core i7-8750H
CPU Frequency	Base: 2.20 GHz Turbo Boost: 4.10 GHz
Cores/Threads	6 Cores / 12 Threads
Cache	9 MB Intel® Smart Cache
TDP	35W - 45W Configurable TDP Power Efficient
Architecture	Coffee Lake (8th Generation)
GRAPHICS & DISPLAY	
Graphics Processor	Intel UHD Graphics 630
Display Support	Dual Display Support (HDMI + VGA) Duplicate & Extend modes
VGA Output	Max Resolution: 1920×1080@60Hz Full HD
HDMI Output	Max Resolution: 4096×2304@30Hz 4K Ultra HD
MEMORY & STORAGE	
Memory Type	DDR4L (Low Voltage DDR4)
Memory Capacity	2× DDR4L slots Maximum: 32GB
Primary Storage	SSD (M.2 SATA)
Secondary Storage	Optional HDD
Expansion Slots	1× M.2 NGFFA slot 1× M.2 PCIe slot / Dual M.2 Support

PROFESSIONAL AUDIO SYSTEM	
Audio Controller	HD Audio Realtek ALC 269 Professional audio codec
Audio Inputs	2× MIC-IN ports Dual Microphone
Audio Outputs	2× LINE-OUT ports Stereo Output
Additional Audio	1× 2-in-1 Audio Port Headphone/Microphone combo Convenient Access
NETWORK & CONNECTIVITY	
Ethernet	10/100/1000Mbps Adaptive RTL 8111H controller Gigabit LAN
Wireless Module	WiFi + Bluetooth Module M.2 NGFFA slot expandable Wireless Ready
Cellular Module	4G Module support SIM Card Slot included Mobile Connectivity Always Connected
EXTENSIVE I/O CONNECTIVITY	
USB 2.0 Ports	4× USB 2.0 ports Abundant Connectivity
USB 3.0 Ports	3× USB 3.0 ports High-Speed Transfer
Modern Ports	1× USB Type-C Future Ready Reversible
Display Outputs	1× HDMI + 1× VGA Dual display capability
Network & Power	1× Ethernet (Gigabit) 1× DC Power Input
Total USB Count	8 USB Ports Total (4×USB2.0 + 3×USB3.0 + 1×Type-C) Maximum Connectivity

ADVANCED BIOS & FEATURES	
Boot Options	PXE / Auto-power-on Wake-on-LAN
Intel Virtualization	Support VT-x, VT-d Virtualization Ready
Hyper-Threading	Fully Supported 12 logical processors
OPERATING SYSTEM	
OS Support	Windows (exclude XP) Linux distributions
PHYSICAL SPECIFICATIONS	
Dimensions	L 200mm × W 180mm × H 40mm
Weight	Net: 0.9kg Gross: 1.75kg (with packaging)
Construction	Full Metal Casing, Premium Build Durable
Heat Dissipation	Active Air Cooling Professional cooling system Stable Performance
Mounting Options	Dedicated bracket included VESA bracket support Flexible Installation
POWER & ENVIRONMENT	
Power Input	DC 12V - 7A 84W Power Supply
Working Temperature	-10°C to 60°C Wide temperature range
Working Humidity	0% - 95% (No Condensation) High Humidity Tolerance
Storage Humidity	0% - 95% (No Condensation)
Static Electricity Protection	Contact discharge 2K / Air discharge 6K

PACKAGE CONTENTS	
Packaging	Kraft Paper Color Box + Anti-fall corrugated outer box Professional Packaging
Power & Cables	• Power Adapter × 1 • Power Cable × 1
Mounting & Documentation	• Bracket × 1 • User Manual × 1 • QA Card × 1 • Screws × 1

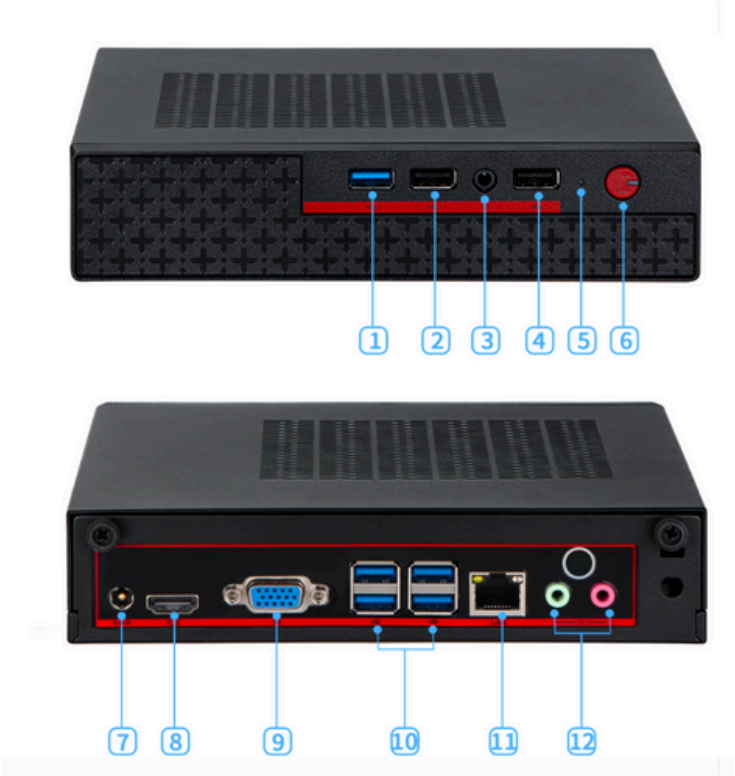

I/O Port

01 USB3.0
02 USB2.0
03 AUDIO (2-in-1 audio port)
04 USB2.0
05 Indicator light
06 Power On/Off
07 DC in (12V input)
08 HDMI
09 VGA
10 USB3.0*4
11 Ethernet
12 MIC&SPK