GB4000 v2
คอมพิวเตอร์เกรดอุตสาหกรรม

Fanless Industrial GB4000-V2(4Lan+10USB)

4Lan+6COM(2*RS232+4*RS485)

- Fanless system without cooling fan, Brushed Full Aluminum Alloy shell for heat dissipation, fit for industrial grade field, work as long as 24 hours.
- High-end Industrial PC less than 1% defective rate, super long lifetime and 3 years warranty.
- 4 x RJ45 LANs, 6 DB9 COM(4COM support RS422/RS485)+4*USB3.0+6*USB2.0
- One embedded SIM card slot onboard for 3G/4G Wi-Fi module.
- Support VGA + HDMI dual display output synchronously.
- Support Watchdog, AWAL, RTC, WOL, PXE, Reset functions.

4*USB3.0+6*USB2.0+GPIO

Technical Specifications

Component	Specification
CPU	1. Intel Core i5-4278U 2.6GHz Max 3.1GHz Dual Cores Four Threads 3MB cache TDP 28W Intel Iris Graphics 5100.
	2. Intel Core i7-4578U 3.0GHz Max 3.5GHz Dual Cores Four Threads 4MB cache TDP 28W Intel Iris Graphics 5100.
	3. Intel Core i3-6157U 2.4GHz Dual Cores Four Threads 3MB cache TDP 28W Intel Iris Graphics 550.
	4. Intel Core i5-7267U 3.1GHz Max 3.5GHz Dual Cores Four Threads 4MB cache TDP 28W Intel® Iris® Plus Graphics 650.
	5. Intel Core i7-7560U 2.4GHz Max 3.8GHz Dual Cores Four Threads 4MB cache TDP 28W Intel® Iris® Plus Graphics 640.
	6. Intel Core i5-8259U 2.3GHz Max 3.8GHz Quad Core Eight Threads 6MB cache TDP 15W Intel® Iris® Plus Graphics 655.
	7. Intel Core i7-8560U 1.9GHz Max 4.2GHz Quad Core Eight Threads 8MB cache TDP 15W Intel® UHD Graphics 620.
	8. Intel Core i5-10210U, 6M Cache, 1.6GHz up to 4.20GHz Quad Cores 8 Threads TDP 15W Intel® UHD Graphics
	9. Intel Core i7 10610U, 8M Cache, 1.8GHz up to 4.90GHz Quad Cores 8 Threads TDP 15W Intel® UHD Graphics
	10. Intel Core i5-1135G7, 8M Cache, 2.4Ghz up to 4.2GHz Quad Cores 8 Threads TDP 15W Intel Iris Xe Graphics
	11. Intel Core i7-1195G7, 12M Cache, 2.9GHz up to 5.0GHz Quad Cores 8 Threads TDP 15W Intel Iris Xe Graphics
	12. Intel Core i5-1235U 1.3GHz up to 4.4GHz 10 Cores 12 Threads 12MB cache TDP 15W Intel Iris Xe Graphics
	13. Intel Core i7-1255U 1.7GHz up to 4.7GHz 10 Cores 12 Threads 12MB cache TDP 15W Intel Iris Xe Graphics.
	14. Intel Core i7-1260P 2.1GHz up to 4.7GHz 12 Cores 16 Threads 18MB cache TDP 28W Intel® Iris® Xe Graphics eligible

TDP	Refer to CPU
Chipset	Refer to CPU
BIOS	American Megatrends Inc
Memory	1 x SO-DIMM DDR3L Slot Support 4GB/8GB (for 4th gen)
	2 x SO-DIMM DDR4 Slot Support 4GB/8GB/16GB/32GB (for 6-11th gen)
	2 x SO-DIMM DDR5 Slot Support 8GB/16GB/32GB/64GB (for 12-13th gen)
OS	Windows 7/Windows 8/Windows 10/11/Linux, WES7/10
Audio	Intel High Definition Audio Controller
Network	Intel i210/i219+Intel(R) i226V(11-13th cpu support 4*intel i226V)
Video	Refer to CPU
M.2/Msata	**Storage:**
	1 x M-SATA3.0 slot for MSATA SSD, support 6Gb/s(4th only)
	1 x M.2 slot for NVME 2280 SSD, support 6Gb/s(6/7/8/10/11/12/13th gen)
SATA	1 x SATA3.0 slot for SATA HDD or SSD, support 6Gb/s
Module	**Wi-Fi:**
	1 x mini PCIE-half port for Wi-Fi/Bluetooth module
	1 x mini PCIE-full port for 3G/4G/Wi-Fi/Bluetooth module
	1 x Extended IO, support LPC, USB, PCIE
Antenna	2 x inner RF cables and 2 x external antennas
Switch	1 x Power On/Off Switch
Power	1 x 3pin phoenix terminal power supply input, support 9~36V
	1 x ATX/AT quick switch

Button	1 x PS/2(keyboard and mouse 2 in 1)
USB	4 x USB3.0+6*USB2.0
Display	1 x VGA, 1 x HDMI
LAN	2 x Intel (i210+i219) +2 x Intel i226V 2.5G(11-13th cpu support 4*intel i226V)
Audio	1 x MIC, 1 x SPK
COM	6 x DB9 COM(4xCOM support RS422/RS485)
GPIO	1 x GPIO(7pin input, 7pin output)
SIM	1 x embedded SIM card slot onboard support 3G/4G network
Others	1 x Reset, 1 x CMOS clear button, 1 x 2pin Phoenix terminal power supply input
Functions	PEX,Watchdog, One key reset, AWAL, RTC, WOL(ATX mode)
Size	248 x 150 x 83 mm
Weight	NW 2.2KG, GW 3.5KG
Shell	Aluminum alloy body
Mounting	4 mounting holes on case
Cooling Mode	Fanless
Standard	**Package Content:**
	1xMini PC, 1xPower Adapter, 1xPower Cord, 1xScrews Bag, Wi-Fi antennas
Optional	1xHDMI cable, 1xUser Manual, 1xLong Screws Bag

Power and Working Environment:	
Input	DC100-240V AC/50-60Hz
Output	DC +9V~+36V, recommend 12V/5A(4-8th), 19V-4.74A(10-13th)
Operating Temperature	-20/+60 Centigrade
Storage Temperature	-20/+70 Centigrade
Relative Humidity	10%~90%@30 Centigrade (non-condensing)
Warranty	1 Year (Carry-in) หรือลูกค้าสามารถซื้อประกันเพิ่มได้สูงสุด 3 ปี
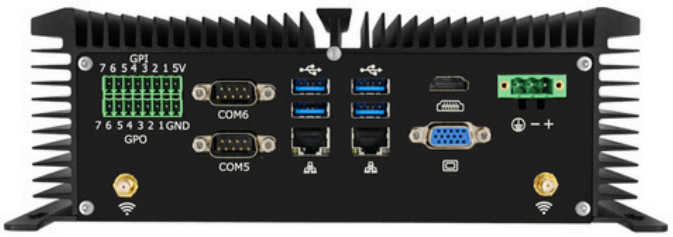
Picture :