หน้าจอแบบสัมผัสเกรดอุตสาหกรรม

# EPC-W12X2A

## Industrial Panel PC with touch screen

- Intel® Celeron® Processor J1900
- Intel® CoreTM 10th Processor 11
- Intel® Celeron® Processor J6412
- Intel® CoreTM 12th Processor

IS 13252 (Part1)/ IEC 60950-1
R-41295345
www.bis.gov.in

## Introduction

The EPC series industrial PC showcases a fanless embedded design powered by CESIPC's proprietary LEGO MODE technology. It offers versatile configuration options, equipped with onboard Intel® Celeron or advanced 10th/12th Gen CoreTM i3/i5/i7 processors, delivering superior performance. Engineered for reliability, the EPC Series ensures high functionality and meets rigorous protection standards, making it an optimal solution for mission-critical industrial applications.

- LEGO MODE with Customizable Function Cards
- i-Door Technology for Efficient, Tailored
- Multi-platform, Multi-tier CPU options
- Board-to-board Design for Stable Performance

## Technical Specifications

| CPU | Celeron J1900 | Celeron J6412 | I3-10110U | I5-10210U | I7-10510U | i3-1215U | i5-1235U | i7-1250U |
|---|---|---|---|---|---|---|---|---|
| **Cores** | 4 | 4 | 2 | 4 | 4 | 6 | 10 | 10 |
| **Threads** | 4 | 4 | 4 | 8 | 8 | 8 | 12 | 12 |
| **Frequency** | 2.0-2.4 | 2.0-2.6 | 2.1-4.1 | 1.6-4.2 | 1.8-4.9 | 1.2-4.4 | 1.3-4.4 | 1.1-4.7 |
| **Cache** | 2MB | 1.5MB | 4MB | 6MB | 8MB | 10MB | 12MB | 12MB |
| **TDP** | 10W | 10W | 15W | 15W | 15W | 15W | 15W | 9W |
| **Graphics** | HD | UHD | UHD | UHD | UHD | UHD Graphics | Iris Xe | Iris Xe |

| ► Memory & Storage |
|---|
| Memory: 4-8GB DDR3L / 4-32GB DDR4 / 4-32GB DDR5 |
| Storage: 1 x mSATA SSD / 1 x mSATA + 1 x M.2 SSD / 1 x M.2 SSD |
| **► Power Supply** |
| DC Input: 1 × 3-pin Pluggable Terminal Block for 12V DC |
| Power Range: 9-36V DC Optional |
| Power Button: 1x ATX Power On/Off Button |
| Booting: 1x AT/ATX Mode Switch (Internal settings) |
| **► Wireless Communication** |
| Wi-Fi: Intel N6235 300Mbps, 802.11a/b/g/n, 2.4G / 5G |
| Wireless Network: 4G LTE Full Netcom Module |

► I / O Ports

| CPU | Celeron J1900 | Celeron J6412 | I3-10110U | I5-10210U | I7-10510U | i3-1215U | i5-1235U | i7-1250U |
|---|---|---|---|---|---|---|---|---|
| USB 2.0/ Type A | 5 | 4 | 2 | 2 | 2 | 2 | 2 | 2 |
| USB 3.0/ Type A | 1 | 2 | 4 | 4 | 4 | 4 | 4 | 4 |
| RS232/ DB9 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| RS485/ DB9 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| VGA | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| HDMI | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Ethernet | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 | 2 x Intel I210 |
| Audio | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS | 3.5mm TRRS |

| ► Display | |
|---|---|
| **LCD Size** | 12.5 inch Panel Size |
| **Resolution** | 1920×1080 16:9 |
| **Brightnesss (cd/m2)** | 300 |
| **Contrast Ratio** | 500 : 1 |
| **Backlight LED Life Time** | 50,000 hrs (LED Backlight) |

| ► Touch Panel | |
|---|---|
| **Touchscreen Type** | Projected Capacitive Touch |
| | Resistive 5-wire (Optional) |

| ► Mechanical | |
|---|---|
| **Dimension** | 327.5(W)×206.5(D)×70.6(H)mm |
| **Cutout Size** | 307.4×190.0mm |
| **Weight** | KG N.W. |
| **Material** | 6063 High-Strength Aluminum Alloy |
| **Mechanical Construction** | Aluminum Extrusion + Sheet Metal Structure |
| **Mount** | Wall Mount / VESA Mount |
| **Clear CMOS Switch** | 1x Clear CMOS Switch |

| ► Environmental | |
|---|---|
| **Specification** | **Details** |
| **Protection Front Panel** | IP65 Compliant |
| **Operating Temperature** | 0~50℃ (-40~70℃ Optional) |
| **Storage Temperature** | -10~60℃ |
| **Relative Humidity** | 10%~90%, Non-condensing |
| **EMC** | CE, FCC (According to EN 55032 & EN 55035) EN IE( |
| **Factory** | ISO9001: 2015 |
| **ODM** | BIOS / Boot on LOGO / OEM |
| **MTBF** | 60,000 Hours |
| **► Operating System** | |
| **OS Category** | **Supported Versions** |
| **Windows** | Windows 10 / Windows 11 |
| | Note: Celeron J1900 can support Windows 7 |
| **Linux** | Ubuntu 16.04 / 18.04 / 20.04 / 22.04 |
| **► Warranty** | 1 Year (carry-in) |
| Warranty Option | ลูกค้าสามารถซื้อประกันเพิ่มได้สูงสุด 3 ปี (Optional) |

## ► Product Selection

| NO. | Model | Describe Information | Standard Memory | Standard Storage |
|---|---|---|---|---|
| 1 | EPC-W1262A | Intel® Celeron® Processor J1900 Processor | 4GB | SSD 128GB |
| 2 | EPC-W1272A | Intel® Celeron® Processor J6412 Processor | 8GB | SSD 256GB |
| 3 | EPC-W1292A | Intel® Core™ i3-10110U Processor | 8GB | SSD 256GB |
| 4 | EPC-W1292A | Intel® Core™ i5-10210U Processor | 8GB | SSD 256GB |
| 5 | EPC-W1292A | Intel® Core™ i7-10510U Processor | 8GB | SSD 256GB |
| 6 | EPC-W1222A | Intel® Core™ i3-1215U Processor | 8GB | SSD 256GB |
| 7 | EPC-W1222A | Intel® Core™ i5-1235U Processor | 8GB | SSD 256GB |
| 8 | EPC-W1222A | Intel® Core™ i7-1250U Processor | 8GB | SSD 256GB |

## ► I/O Port

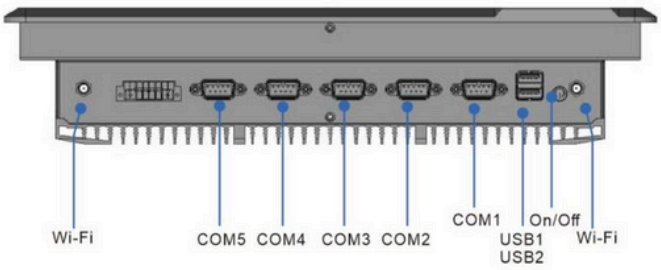


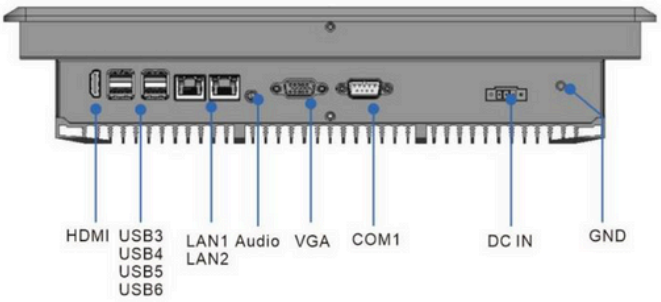

## ► Product Images

## ► Product Sizes

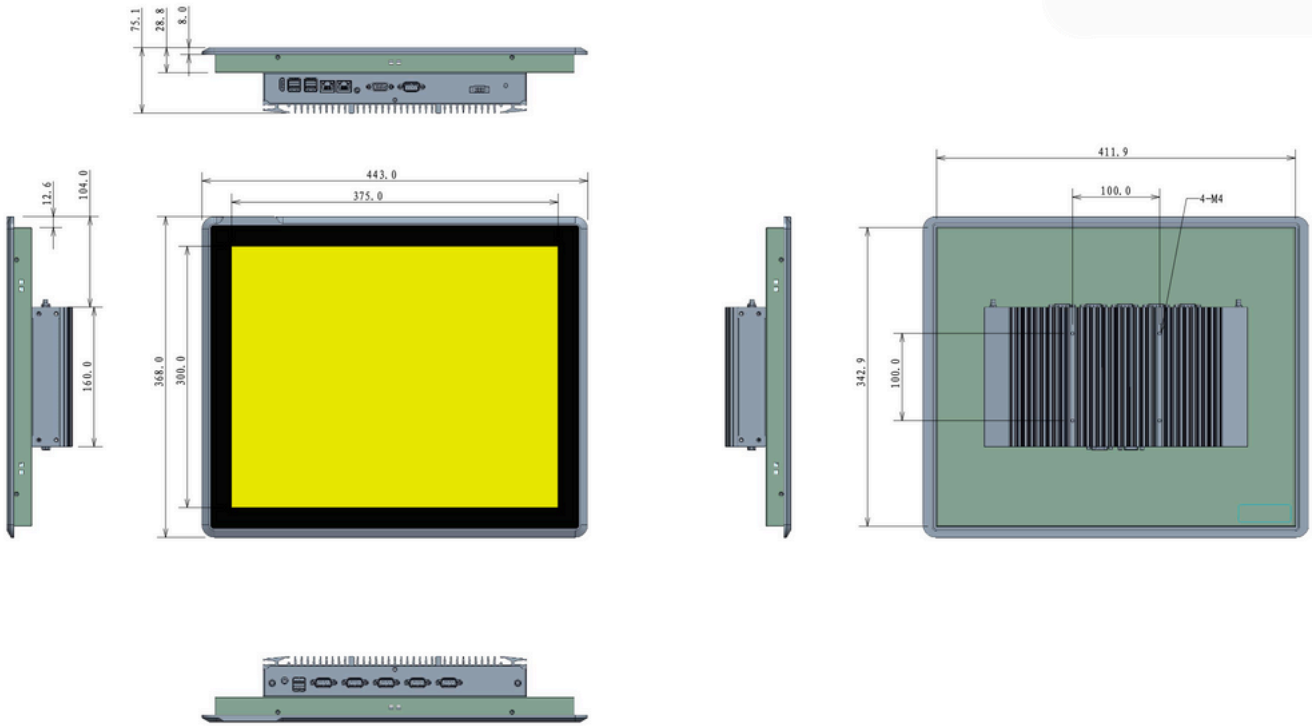


## ► Applications

The EPC series is designed for various industrial applications including:

| | |
|---|---|
| • Industrial Automation Systems | • Digital Signage Solutions |
| • Manufacturing Process Control | • Smart Factory Implementation |
| • Building Management Systems | • Quality Control Systems |
| • Transportation and Logistics | • Data Acquisition and Monitoring |