มินิคอมพิวเตอร์

K3-C7

Mini Computer

Key Benefit

- Digital Signage - รองรับ 4K และ Dual Display
- Industrial Automation - Internal I/O Pins เยอะ
- Network Gateway - รองรับ 4G/WiFi + Gigabit LAN
- Embedded Systems - OEM Integration ง่าย
- Remote Monitoring - SIM card + Multiple connectivity

Specification

CPU Model	Intel Core i3 6157U
CPU Frequency	2.40 GHz Base Clock
Cores/Threads	2 Cores / 4 Threads Hyper-Threading Support
Cache	3 MB Intel Smart Cache
TDP	28W
Architecture	Skylake Architecture
Graphics Processor	Intel® Iris® Plus Graphics 650 Superior Graphics 4K Ready
Display Support	4K Support / Dual Display (Duplicate mode, Extend mode)
VGA Output	Max Resolution: 1920×1080@60Hz Full HD
HDMI Output	Max Resolution: 4096×2304@24Hz 4K Ultra HD
Memory Slot	1× DDR3L slot Max support 8GB
Primary Storage	SSD (PCIe SSD adaptive)
Secondary Storage	Optional HDD (Motherboard supports 2.5-inch expansion)
Audio Controller	Onboard Realtek ALC269HD Audio decoder controller
Audio I/O	1× MIC-IN, 1× LINE-OUT
Ethernet	10/100/1000Mbps Adaptive RTL 8111F controller
Wireless Options	WiFi + Bluetooth Module (MINI PCIe) OR 3G/4G

Mounting Options	Dedicated bracket included VESA bracket support
Power Input	DC 12V - 5A External power adapter
Working Temperature	-10°C to 60°C Wide temperature range
Working Humidity	0% - 95% (No Condensation) High Humidity Tolerance
Storage Temperature	-10°C to 60°C
Storage Humidity	0% - 95% (No Condensation)
Static Electricity Protection	Contact discharge 2K Air discharge 6K
Packaging	Kraft Paper Color Box + Anti-fall corrugated outer box Professional Packaging
Power & Cables	• Power Adapter × 1 • Power Cable × 1
Mounting & Documentation	• Bracket × 1 • User Manual × 1 • QC Card × 1 • Screws × 1

Mounting Options	Dedicated bracket included VESA bracket support
Power Input	DC 12V - 5A External power adapter
Working Temperature	-10°C to 60°C Wide temperature range
Working Humidity	0% - 95% (No Condensation) High Humidity Tolerance
Storage Temperature	-10°C to 60°C
Storage Humidity	0% - 95% (No Condensation)
Static Electricity Protection	Contact discharge 2K Air discharge 6K
Packaging	Kraft Paper Color Box + Anti-fall corrugated outer box Professional Packaging
Power & Cables	• Power Adapter × 1 • Power Cable × 1
Mounting & Documentation	• Bracket × 1 • User Manual × 1 • QC Card × 1 • Screws × 1

i/O Port

01 Power ON/OFF
02 USB2.0*2
03 MIC
04 SPK
05 RJ45 Gigabit LAN
06 USB2.0*2
07 USB3.0*2
08 VGA
09 HDMI
10 DC12V Input

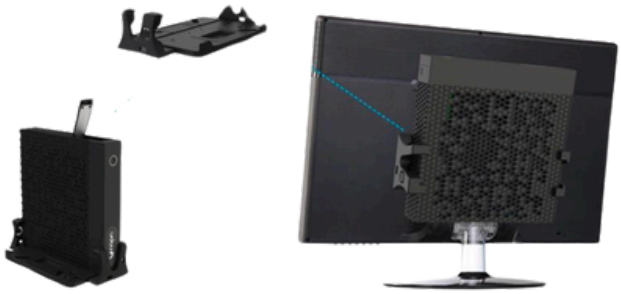

Sample Installation