



PRODUCT
DATASHEET '25-26'

ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS



VizSens-03

Ozone Sensor

www.advanceanalytik.com
sales@advanceanalytik.com

VizSens-O3

Ozone Sensor


VizSens-O3 electrode is a 2-electrode measurement system using the coating method. The detection part adopts a special permeable membrane technology, which has the characteristics of resisting chemical (mainly surfactant) interference and reducing pH dependence.

Fast speed, stable performance, low cost and low maintenance, providing users with reliable and accurate data.



Product Features

- Basically not affected by PH.
- Internal processing of digital signal data, free from electromagnetic interference.
- Stable work and fast response.
- Low cost and less maintenance.

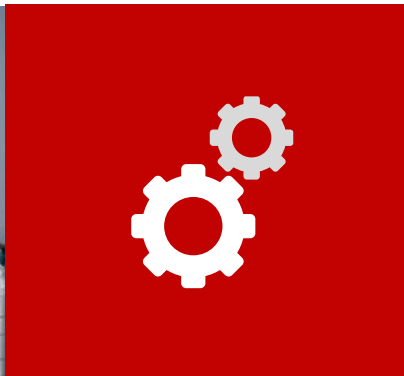

VizSens-03

Technical Specifications

BASIC SPECIFICATION	
Measurement Range	0~20 ppm
Precision	Range: 0~2ppm: Less than 1%
pH Range	pH: 2~11
Flow rate	In the flow cell: 250~500ml/min, the flow rate has little effect on it.
Response time	T90: about 15s (up to 90% of the measured value)
Slope calibration	On the measuring device, determined by analytical methods
Temp compensation	Integrated automatic temp. compensation
Material	PVC-U, Semipermeable membrane, ABS
Operating temp	Measuring water temp.: 0~45 °C (no condensation in water); Ambient room temp.: 0~55 °C
Size	Diameter 25mm * length 220mm
Cable length	Standard:10m, the maximum may be extended to 100m



APPLICATIONS



Industrial Manufacturing
Monitor oil levels in cooling systems and lubrication circuits for efficient machinery operation.



Wastewater Treatment
Detect oil contamination in water discharges, ensuring compliance with environmental regulations.



Oil Refineries
Maintain water purity by tracking oil presence in cooling and water treatment systems.




Marine Applications
Monitor bilge water for oil leakage prevention in marine vessels.



Power Plants
Control oil leaks and contamination in water circulating systems for enhanced efficiency.



Chemical Processing
Ensure process water purity by monitoring oil content in chemical manufacturing.

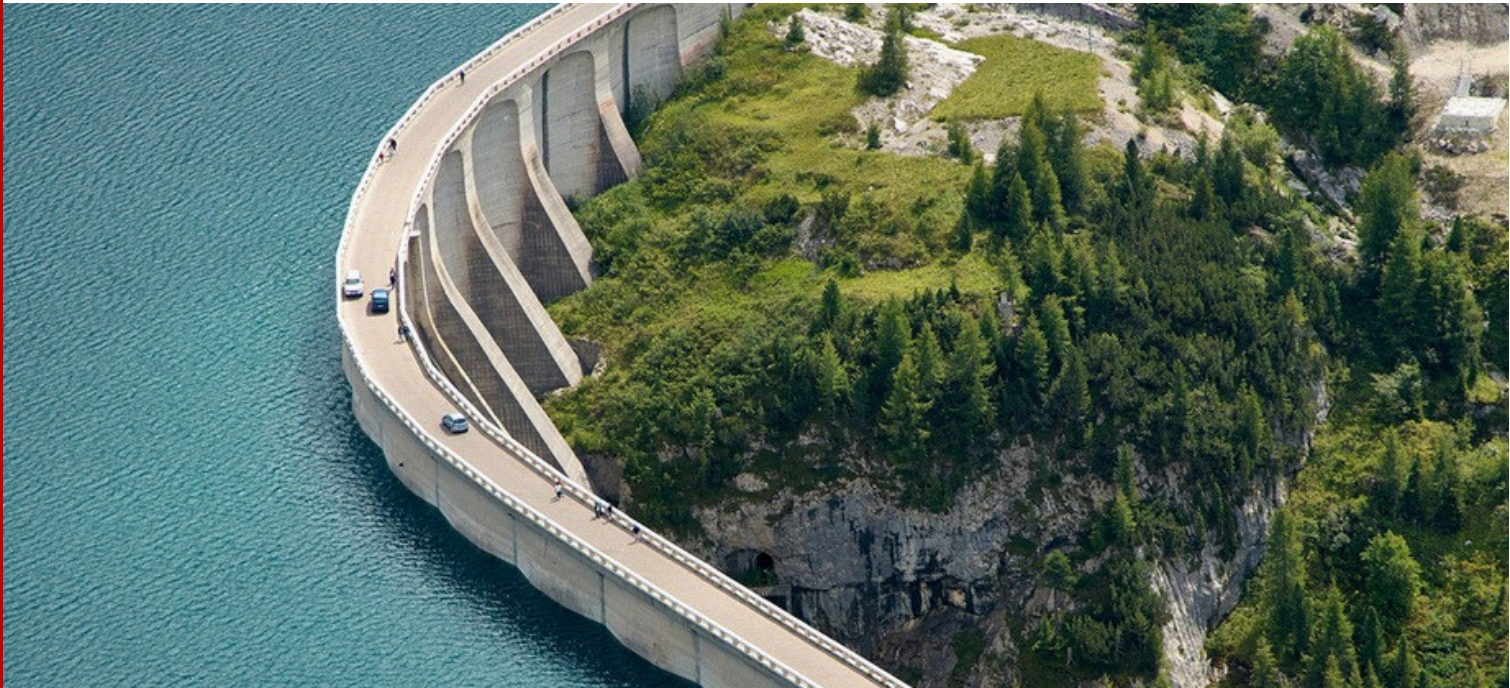

Note -

This data sheet serves as general information about the VizSens-03. For specific technical details, installation guidelines, and troubleshooting assistance, please refer to the official user manual provided with the product.

For inquiries and detailed technical information, please contact sales@advanceanalytik.com.



LET'S CONNECT !

Let's work together to find a solution that works for you



Contact Us :

+36 70328 6862 1132,
Budapest Váci ut 16 Faz 12. ajto
<https://advanceanalytik.com>
sales@advanceanalytik.com

