



PRODUCT
DATASHEET '25-26

ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS



Gaz-PGA-03

Portable ozone gas detector

www.advanceanalytik.com

sales@advanceanalytik.com

Gaz PGA-O3

Portable ozone gas detector


Gaz-PGA-O3 series product is portable Ozone detection instruments with high sensitivity for industrial use. They are suitable for gas leakage rescue, underground pipelines or mines, etc., and can effectively guarantee the safety of workers and production equipment from being damaged. It can detect different gases according to different types of sensors, with rich functions, simple operation, easy to carry and good shock resistance. This product uses the high resolution touch LCD technology, the display is more intuitive and clear, more convenient to operate.

Gaz-PGA-O3, Series is the product form, representing portable gas detector; refers to the design serial number and represents a variety of gas combinations.



Main functions and features

- Large screen color menu operation
- High-resolution touch LCD display
- Quick detection of gas leak points
- Adjustable range
- quick preheating, quick response time
- Sound vibration alarm signal
- Convenient zero adjustment, convenient and quick
- It can detect up to 8 free combinations of gases
- Gases temperature is very high, we will equip you the high temperature sampling gun.

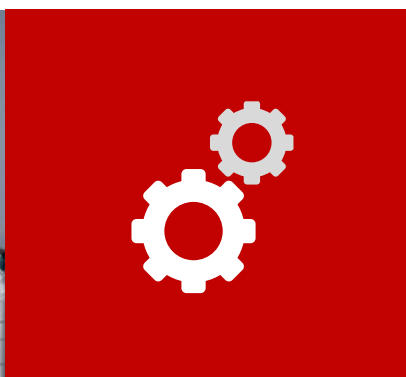

Main technical parameters

- **Product name:** Portable ozone gas detector
- **Measuring Range:** 0 to 10 ppm.
- **Sampling mode:** built-in pump suction type
- **Response time:** $\leq 30s$
- **Indication error:** $\leq 3\%FS$
- **Work environment:** temperature $-10^{\circ}C \sim 55^{\circ}C$;
- **Relative humidity:** $\leq 93\%$ (non condensing)
- **Preheating time:** $\leq 90s$
- **Storage environment:** temperature: $-10^{\circ}C \sim 55^{\circ}C$;
- **Relative humidity:** $\leq 93\%$ (no condensation)
- **Indication mode:** LCD color touch LCD display
- **Charging time:** no less than 10 hours
- **Continuous working time:** no less than 15 hours
- **Battery specification:** DC7.2 v-26ah lithium io rechargeable battery.
- **Weight:** About 4.75kg
- **Size:** 293x110x210(mm).

Appearance and function indication

- 1.Time
- 2.Electricity
- 3.Gas name
- 4.Detection concentration
- 5.Gas Unit
- 6.Left button
- 7.Menu/exit button
- 8.Right button
- 9.Power light
- 10.Alarm light
11. Fault light
- 12.On/off button



We provide required accessories.

- Sampling tube
- Ultra-high quality password box
- Calibration tube
- Charger



LET'S CONNECT !

Let's work together to find a solution that works for you



Contact Us :

+36 70328 6862

1132, Budapest Váci ut 16 Faz

12. ajto

<https://advanceanalytik.com>

sales@advanceanalytik.com

