



PRODUCT  
DATASHEET '25

# ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS



## Gaz PGA

**Portable multi gas analyzer**

[www.advanceanalytik.com](http://www.advanceanalytik.com)

[sales@advanceanalytik.com](mailto:sales@advanceanalytik.com)

## Gaz PGA

### Portable multi gas analyzer


Gaz-PGA series product is portable multi-gas detection instruments with high sensitivity for industrial use. They are suitable for gas leakage rescue, underground pipelines or mines, etc., and can effectively guarantee the safety of workers and production equipment from being damaged. It can detect different gases according to different types of sensors, with rich functions, simple operation, easy to carry and good shock resistance. This product uses the high resolution touch LCD technology, the display is more intuitive and clear, more convenient to operate.

Gaz-PGA, Series is the product form, representing portable gas detector; refers to the design serial number and represents a variety of gas combinations.



### Main functions and features

- Large screen color
- High-resolution touch LCD display
- Quick detection of gas leak points
- Adjustable range
- quick preheating, quick response time
- Sound vibration alarm signal
- Convenient zero adjustment, convenient and quick
- It can detect up to 8 free combinations of gases
- Gases temperature is very high, we will equip you the high temperature sampling gun.

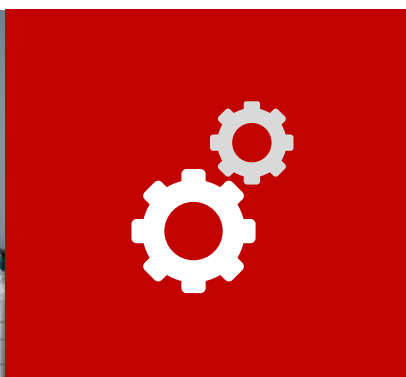

## Main technical parameters

- **Product name:** portable multi-gas detector
- **Parameters:** O3, CO2, CH4, NO, NO2, O2, H2S, CO, SO2, NOx.
- **Sampling mode:** built-in pump suction type
- **Response time:**  $\leq 30s$
- **Indication error:**  $\leq 3\%FS$
- **Work environment:** temperature  $-10^{\circ}C \sim 55^{\circ}C$ ;
- **Relative humidity:**  $\leq 93\%$ (non condensing)
- **Preheating time:**  $\leq 90s$
- **Storage environment:** temperature:  $-10^{\circ}C \sim 55^{\circ}C$ ;
- **Relative humidity:**  $\leq 93\%$ (no condensation)
- **Indication mode:** LCD color touch LCD display
- **Charging time:** no less than 10 hours
- **Continuous working time:** no less than 15 hours
- **Battery specification:** DC7.2 v-26ah lithium io rechargeable battery.
- **Weight:** About 4.75kg
- **Size:** 293x110x210(mm).

## Appearance and function indication


- 1.Time
- 2.Electricity
- 3.Gas name
- 4.Detection concentration
- 5.Gas Unit
- 6.Left button
- 7.Menu/exit button
- 8.Right button
- 9.Power light
- 10.Alarm light
11. Fault light
- 12.On/off button





## Gas detector parameter list

| Gas                     | Measuring range | Optional range         | Resolution    | Response time |
|-------------------------|-----------------|------------------------|---------------|---------------|
| EX                      | 0-100%LEL       | 0-100%VOL (infrared)   | 1%LEL / 1%vol | ≤10s          |
| CO                      | 0-1000PPM       | 0-500 / 2000 / 5000PPM | 0.1 / 1PPM    | ≤10s          |
| O <sub>2</sub>          | 0-30%VOL        | 0-30% / 0-100%VOL      | 0.1%vol       | ≤10s          |
| H <sub>2</sub> S        | 0-100PPM        | 0-50 / 200 / 1000PPM   | 1 / 0.1PPM    | ≤10s          |
| NH <sub>3</sub>         | 0-100PPM        | 0-50 / 500 / 1000PPM   | 1 / 0.1PPM    | ≤15s          |
| Benzene gas             | 0-100PPM        | 0-1 / 10 / 50 / 100PPM | 0.01 / 0.1PPM | ≤20s          |
| Natural gas             | 0-100%LEL       | 0-100%LEL              | 1%LEL         | ≤20s          |
| CH <sub>4</sub>         | 0-100%LEL       | 0-100%VOL              | 1%LEL / 1%vol | ≤20s          |
| Fluorine                | 0-10PPM         | 0-1 / 10PPM            | 1 / 0.1PPM    | ≤20s          |
| Ozone (O <sub>3</sub> ) | 0-2000 PPB      | 0-20,000 PPB           | 0.1 PPB       | ≤10s          |
| Gas                     | Measuring range | Optional range         | Resolution    | Response time |
| O <sub>2</sub>          | 0-30%VOL        | 0-30% / 0-100%VOL      | 0.1%vol       | ≤10s          |

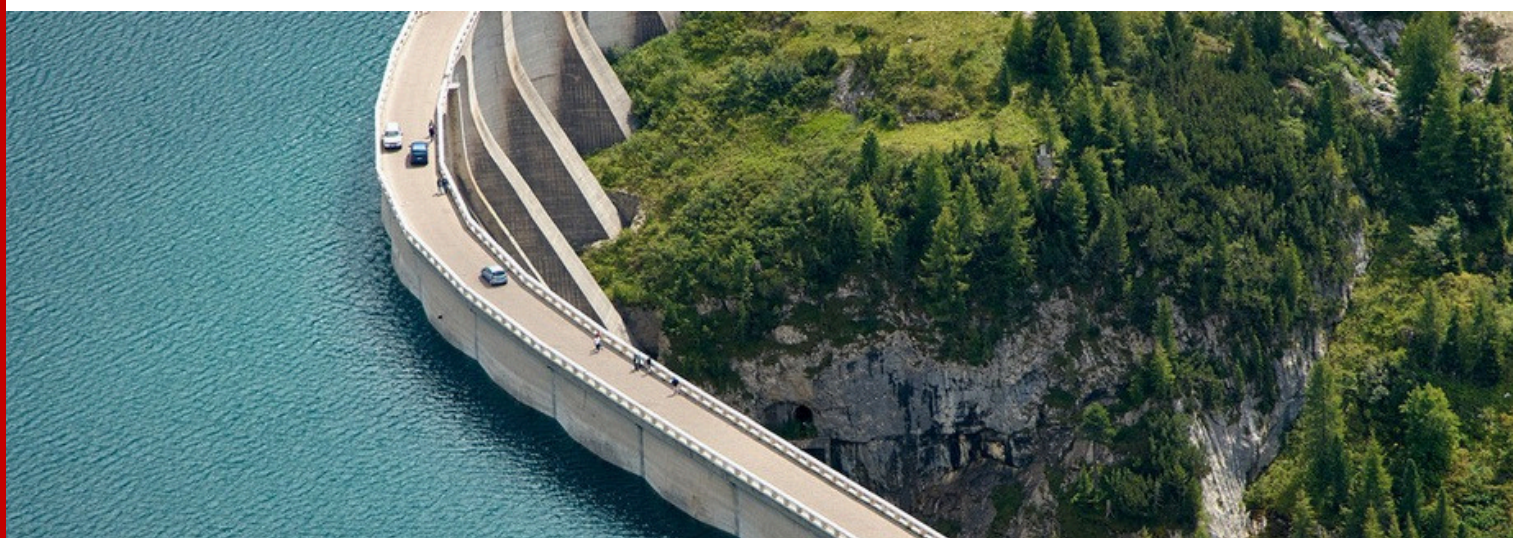

### Note -

*This data sheet serves as general information about the Gaz PGA. For specific technical details, installation guidelines, and troubleshooting assistance, please refer to the official user manual provided with the product.*

*For inquiries and detailed technical information, please contact [sales@advanceanalytik.com](mailto:sales@advanceanalytik.com).*



# LET'S CONNECT !

Let's work together to find a solution that works for you



## Contact Us :

+36 70328 6862

1132, Budapest Váci ut 16 Faz

12. ajto

<https://advanceanalytik.com>

[sales@advanceanalytik.com](mailto:sales@advanceanalytik.com)

