



Vizens-D0

Dissolved Oxygen Sensor



www.advanceanalytik.com

**ADVANCE
ANALYTIK**

Vizens-D0

Dissolved Oxygen Sensor

The Vizens-D0 Dissolved Oxygen Sensor is a cutting-edge solution designed for precise and reliable measurements in various environments. Featuring a new oxygen-sensitive membrane with NTC temperature compensation, this sensor ensures excellent repeatability and stability. Breakthrough fluorescence technology eliminates the need for membranes and electrolytes, resulting in minimal maintenance. With built-in self-diagnosis, plug-and-play installation, and integration capabilities, the Vizens-D0 is a versatile solution for diverse applications.



Product Features

1. **New Oxygen Sensitive Membrane:** Enhanced measurement repeatability and stability.
2. **NTC Temperature Compensated:** Accurate measurements in varying temperatures.
3. **No Oxygen Consumption:** Eliminates the need for flow rate and stirring.
4. **Breakthrough Fluorescence Technology:** Minimal maintenance requirements.
5. **Built-in Self-Diagnosis:** Ensures data accuracy and reliability.
6. **Plug-and-Play Installation:** Quick and easy setup.
7. **Factory Calibration:** No calibration needed for a year; field calibration supported.
8. **Digital Sensor:** High anti-jamming capacity and far transmission distance.
9. **Standard Digital Signal Output:** Integration and networking without a controller.



Vizensens-DO

Technical Specifications

Physical Specifications	
Model	Vizensens-DO
Measurement Specifications - Dissolved Oxygen	
Measurement Range	DO: 0-20 mg/L or 0-200% saturation
	Temperature: 0-45 °C
Output Resolution	0.01 mg/L
Repeatability	DO: ±3% or ±0.3 mg/L, whichever is greater
Calibration	Air automated calibration, sample calibration
Main Material	
Body	SS316L (fresh water)
	Titanium alloy (Ocean marine)
Cover	PPS+ glass fiber
Cable	PUR
Electrical Specifications	
Power Supply	AC: 85-500 VAC (50/60HZ)
	DC: 9-36 VDC
Pressure Range	≤0.3 Mpa
Environmental Specifications	
Storage Temperature	-15-60 °C
Measuring Temperature	0-45 °C (Non-freezing)
Dimensions	Dia49.5mm * L 251.5mm
Weight	1.4 Kg
Protective Rate	Sensor: IP68/NEMA6P
Cable Length	Standard: 10m, extendable to 100m
Compatibility	
Compatible Controllers	AAC100-200, AAC100-400, AAP-C1000-200, AAP-PC-800
Performance and Communication	
Measurement Accuracy	±0.5
Communication Protocol	MODBUS RS485




www.advanceanalytik.com


APPLICATIONS



Precise DO monitoring in regulating reservoirs, biochemical pools, and sewage treatment plant effluents.



Online DO monitoring in water treatment plants, surface water, industrial processes, and aquaculture.

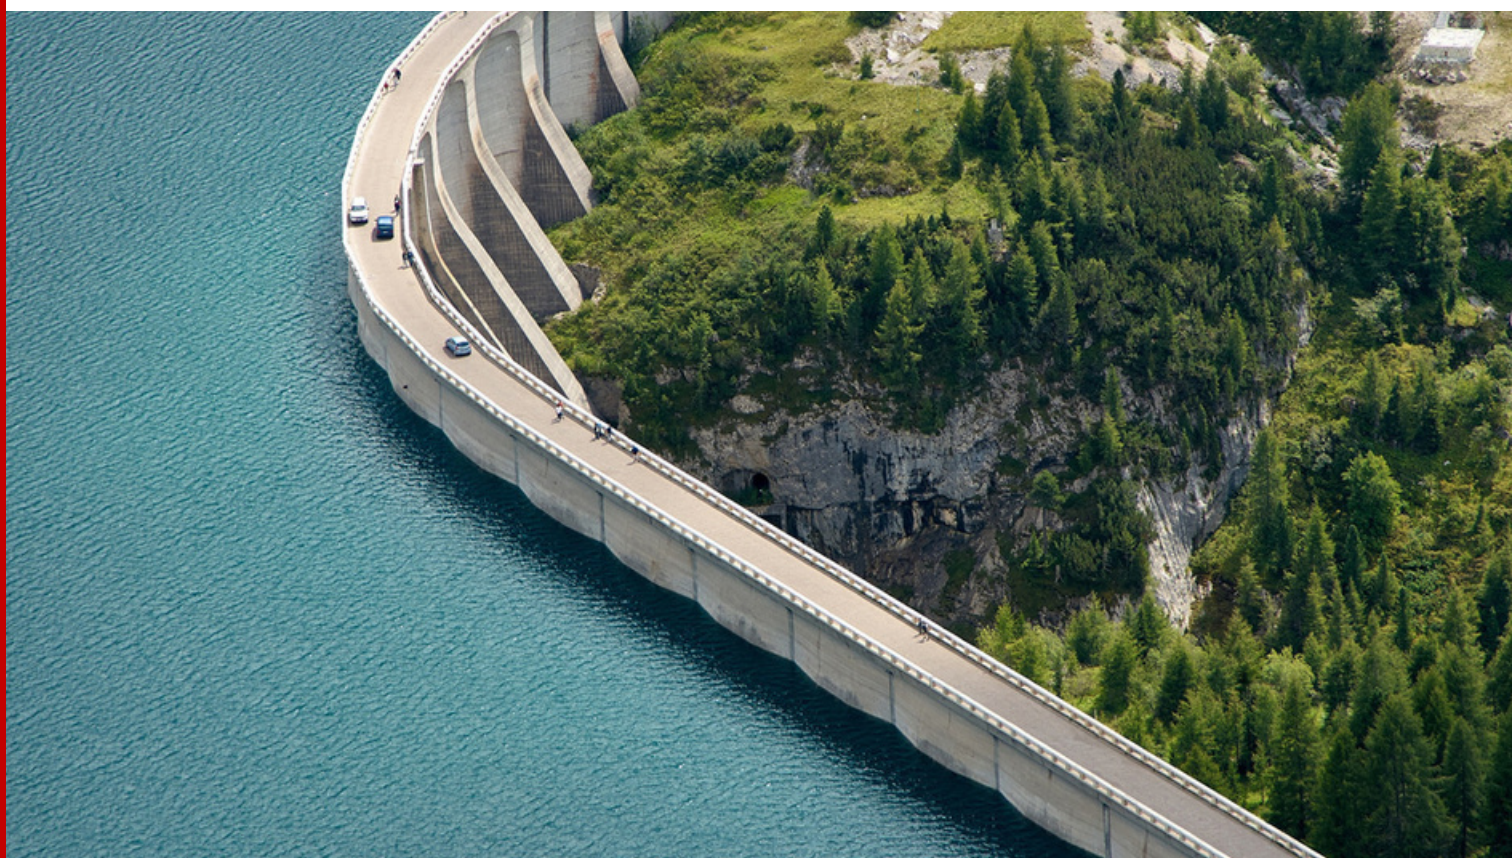

Note -

This data sheet serves as general information about the Vizensens-DO. For specific technical details, installation guidelines, and troubleshooting assistance, please refer to the official user manual provided with the product.

For inquiries and detailed technical information, please contact info@advanceanalytik.com.

ADVANCE ANALYTIK



Advance Analytik KFT
1132, Budapest Váci ut 16
Faz 12. ajtó
+36 70 328 6862
sales@advanceanalytik.com



www.advanceanalytik.com