MAKNANA

55 Maknana robots, from 6 kg to 6 tonnes

ROBOT CATALOG HIGHLIGHTS | NOVEMBER 2026



Robots shown are product renderings in Maknana livery. Product names, ratings and specifications are subject to change; each quotation confirms them.

MAKNANA | SAUDI MADE

One Riyadh team supplies the robot, builds the cell on request and services it

Pick the robot by what it must carry and how far it must reach. Maknana then designs the cell around it: the fixtures, the grippers, the guarding and the controls.

Start with page 6 to choose by payload and reach, or page 7 to find the family for a job. Each family opens with its models side by side, then shows its lead model beside a table of every model. The full catalog has a card for each model.

Every figure is sourced on its page. Rounding rules are on page 36.

55
robots in nine families

6 kg–6 t
payload range

3
models made in Riyadh



Photo: MR50 cell, Riyadh facility

Sources: Maknana MR-Series datasheets (2026); manufacturer datasheets, 2023–2026.

Three MR models are made in Riyadh, with capacity for about 200 robots a year

Core components and platform technologies come through an established international partnership. Assembly, wiring, testing, integration and service are done by Maknana in Riyadh.

The other models in this catalog are supplied to order and tested in Riyadh before they ship.



Photo: MR-Series launch, Riyadh, September 2026

3

Models in production: MR6-1400, MR6-2080 and MR50-2185

≈200

Robots a year: capacity stated at launch

2026

MR-Series launched in Riyadh, September 2026

Sources: MR-Series launch (September 2026); capacity is company-stated.

Nine robot families, from a compact arm to a six-tonne lifter

02



Compact

7–8 kg p. 8

03



Welding

6–10 kg p. 10

04



Light handling

6–10 kg p. 13

05



Medium payload

20–125 kg p. 16

06



High payload

210–310 kg p. 19

07



Heavy handling

500–6,000 kg p. 22

08



Palletizing

50–300 kg p. 25

09



Press tending

15–40 kg p. 28

10



Heavy palletizing

500–6,000 kg p. 31

11


From robot to cell

Service, specification index and glossary p. 33

Choose a robot p. 5–7 **Cases and practice** p. 15 · p. 18 · p. 21 · p. 24 · p. 27 · p. 30

Robots shown are product renderings in Maknana livery.

Nine families span payloads from 6 kg to 6 tonnes

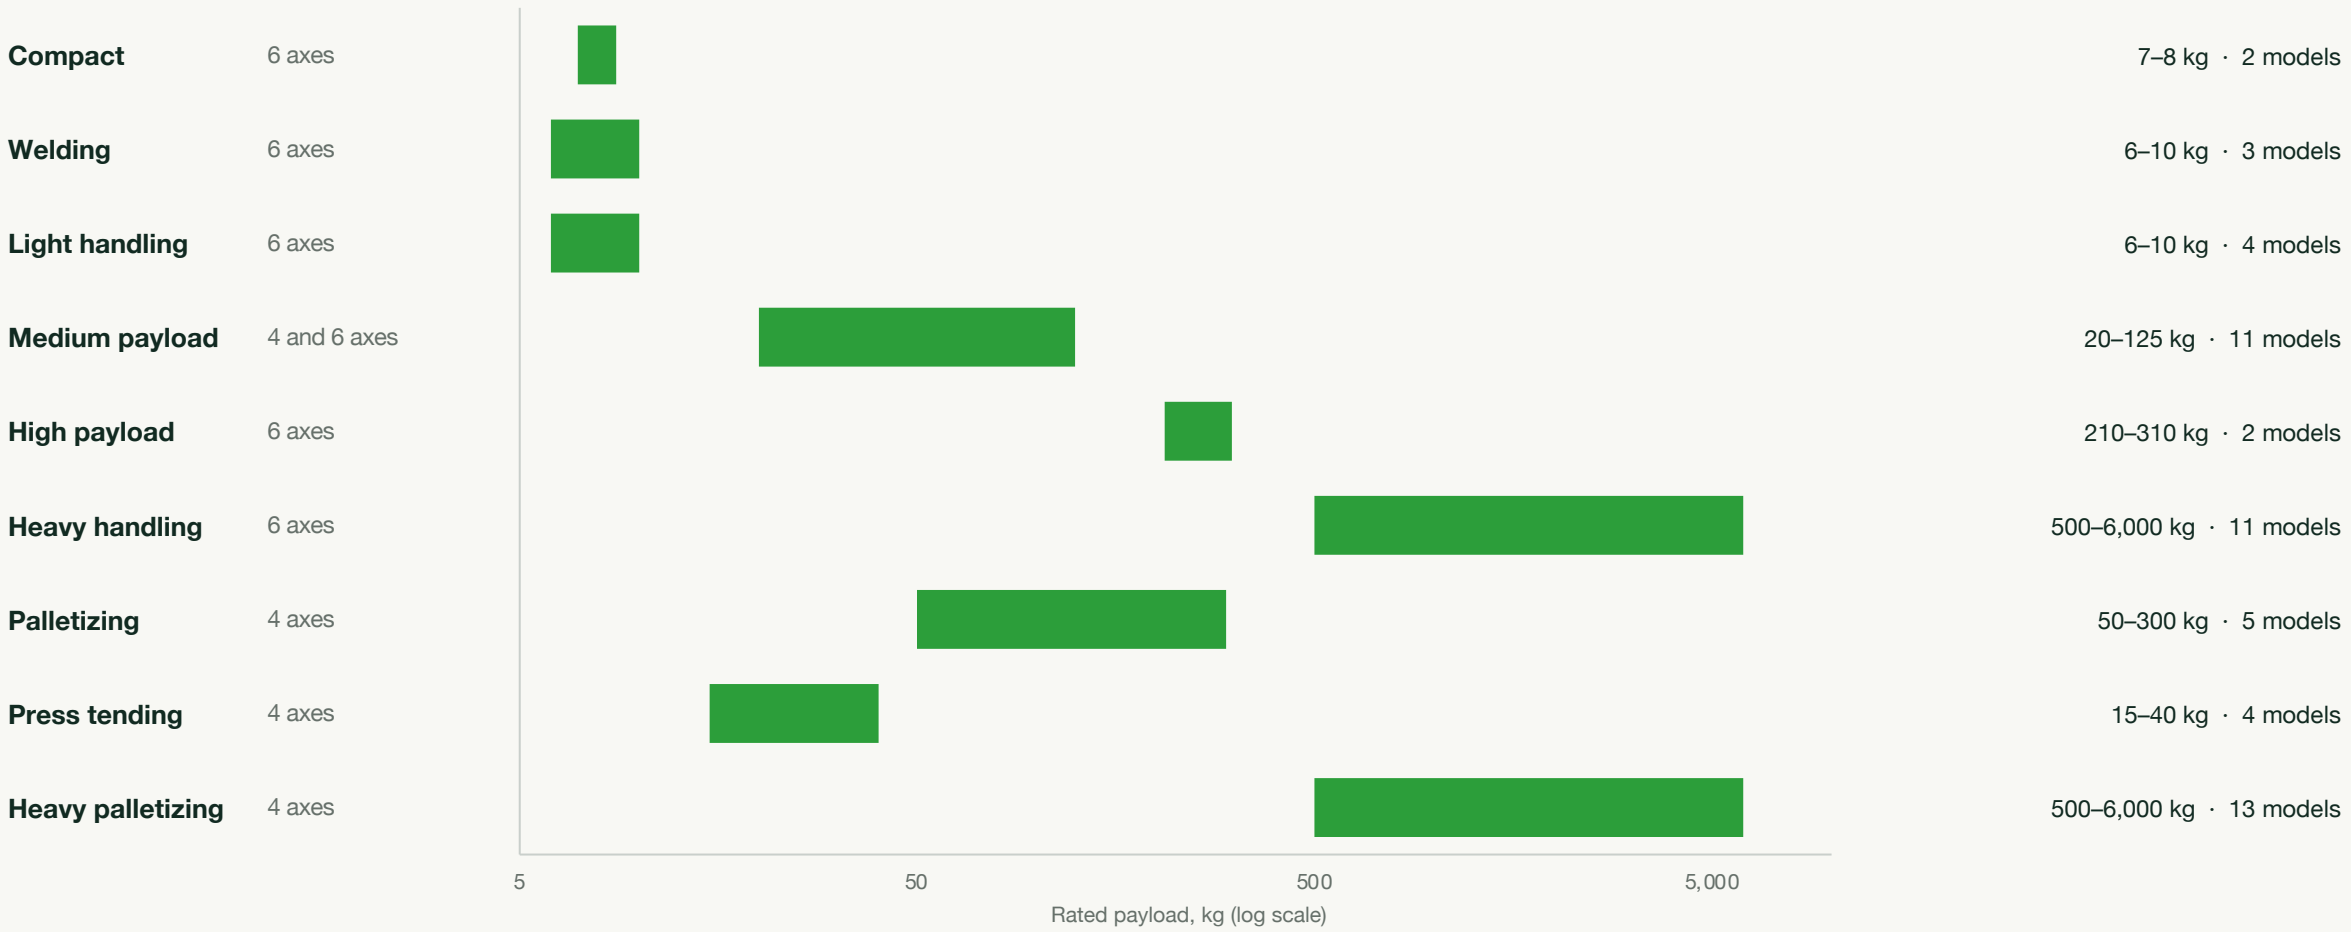

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Payload axis is logarithmic. No model sits between 310 kg and 500 kg.

Five numbers decide which robot fits the job

kg

Payload

Weight at the wrist, including the gripper or torch. Add the tool before you compare.

m

Reach

How far the wrist reaches from the center of the base. It sets the size of the cell.

4 / 6

Axes

Six axes turn the tool in any direction. Four axes keep it level, for fast stacking.

±mm

Repeatability

How closely the robot returns to a taught point. Welding needs tighter values than stacking.

IP

Protection

IP65 keeps out dust and water jets. IP67 on the wrist adds protection against short immersion.

WORKED EXAMPLE

A 12 kg part in a 3 kg gripper, set down 1.6 m from the robot base, tilted on the way.

15 kg

Payload needed: part plus gripper, 12 + 3

1.7 m+

Reach with a margin of about 0.1 m

6 axes

The part must tilt, so a four-axis robot is out

MR20-1740

Smallest fit: 20 kg, 1,740 mm, ±0.05 mm (page 17)

Not sure? Send the part drawing, its weight and the target cycle time. Maknana returns a cell layout, a cycle time and a price.

Sources: ISO 9283 (repeatability definition; the datasheets do not state their test basis); IEC 60529 (IP codes); manufacturer datasheets. Worked example: our arithmetic; Maknana confirms the choice against the wrist load diagram in the application study.

27 common jobs, each matched to the robot family that does it

Job	Family	Axes	Page
Small-part assembly and screwing	Compact	6	8
Picking and packing	Compact	6	8
Light dispensing	Compact	6	8
Arc welding of frames, tanks and steel structures	Welding	6	10
Plasma and laser cutting	Welding	6	10
Assembly beside the weld cell	Welding	6	10
CNC and molding machine tending	Light handling	6	13
Gluing, sealing and finishing	Light handling	6	13
Water-based spraying	Light handling	6	13
Machine tending of heavy parts	Medium payload	6	16
Case and part handling	Medium payload	6	16
Grinding and finishing	Medium payload	6	16
Mold and fixture handling	High payload	6	19
Grinding and sanding of heavy parts	High payload	6	19

Job	Family	Axes	Page
Engine blocks and castings	High payload	6	19
Foundry and steel handling	Heavy handling	6	22
Rail, energy and heavy-equipment parts	Heavy handling	6	22
Loading of large machine tools	Heavy handling	6	22
Cement, fertilizer and polymer sacks	Palletizing	4	25
Water, beverage and date cases	Palletizing	4	25
End-of-line stacking	Palletizing	4	25
Press-to-press transfer	Press tending	4	28
Blank loading and part unloading	Press tending	4	28
Appliance, HVAC and auto parts	Press tending	4	28
Heavy end-of-line stacking	Heavy palletizing	4	31
Coil and billet transfer	Heavy palletizing	4	31
Large-part stacking	Heavy palletizing	4	31

Sources: manufacturer datasheets (applications per model); Maknana application studies. Page = the family's opening page. Medium payload also includes one four-axis column lifter, MR120-1900V.

02



Robots shown are product renderings in Maknana livery.

Compact arms small enough for a machine enclosure or a tight cell

Six-axis arms for small parts, from 7 to 8 kg.

7–8 kg	0.7–1.0 m	2 models
payload	reach	6 axes

Where it works Small-part assembly and screwing · Picking and packing · Light dispensing

MODEL	PAYLOAD	REACH, M
MR7-740C	7 kg	0.74
MR8-960C	8 kg	0.96

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR7-740C mounts on the floor; MR8-960C also mounts on walls and ceilings

Two compact robots for 7–8 kg, with 0.7–1.0 m of reach



Rendering, family look

MR7-740C

Supplied to order

7 kg payload	740 mm reach
±0.04 mm repeatability	50 kg robot weight

Axis	Max speed	Motion range
J1	305 °/s	±171°
J2	280 °/s	+65° / –141°
J3	300 °/s	+170° / –66°
J4	300 °/s	±180°
J5	405 °/s	±119°
J6	600 °/s	±360°

Protection	IP65	Power	1.5 kVA
Mounting	Floor	Ambient	0–45 °C
Base	210 × 235 mm		
Wrist	J4 15 · J5 15 · J6 8 N·m		



Rendering, family look

MR8-960C

Supplied to order

8 kg payload	960 mm reach
±0.05 mm repeatability	70 kg robot weight

Axis	Max speed	Motion range
J1	230 °/s	±165°
J2	230 °/s	+90° / –160°
J3	200 °/s	+148° / –89°
J4	240 °/s	±180°
J5	400 °/s	±119°
J6	600 °/s	±360°

Protection	IP65	Power	1.5 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	280 × 362 mm		
Wrist	J4 15 · J5 15 · J6 8 N·m		

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Wall and angled mounting restrict the J1 range.

03



Robots shown are product renderings in Maknana livery.

A hollow wrist keeps the welding cable inside, so the torch reaches tight joints

Six-axis welding arms. The torch cable runs inside the wrist, so it snags less.

6–10 kg	1.4–2.1 m	3 models
payload	reach	6 axes

Where it works Arc welding of frames, tanks and steel structures · Plasma and laser cutting · Assembly beside the weld cell

MODEL	PAYLOAD	REACH, M
MR6-1400	6 kg	1.44
MR6-2080	6 kg	2.08
MR10-1450W	10 kg	1.45

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36. Models in production in bold and dark green.

MR6-1400 and MR6-2080 are made in Riyadh, with a hollow wrist for the cable

Two welding robots for 6 kg, with 1.4–2.1 m of reach



Rendering, family look

MR6-1400

In production in Riyadh

6 kg payload	1,440 mm reach
±0.05 mm repeatability	150 kg robot weight

Axis	Max speed	Motion range
J1	240 °/s	±170°
J2	240 °/s	+90° / –155°
J3	260 °/s	+169° / –86°
J4	400 °/s	±155°
J5	400 °/s	+134° / –137°
J6	700 °/s	±220°

Protection	IP65	Power	3 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	355 × 355 mm		
Wrist	J4 10 · J5 10 · J6 5.5 N·m		



Rendering, family look

MR6-2080

In production in Riyadh

6 kg payload	2,080 mm reach
±0.08 mm repeatability	280 kg robot weight

Axis	Max speed	Motion range
J1	190 °/s	±170°
J2	190 °/s	+100° / –157°
J3	190 °/s	+90° / –80°
J4	400 °/s	±155°
J5	400 °/s	+134° / –137°
J6	700 °/s	±220°

Protection	IP65	Power	3.8 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	396 × 396 mm		
Wrist	J4 10 · J5 10 · J6 5.5 N·m		

Sources: Maknana MR-Series datasheets (2026). Rounding: page 36. Wall and angled mounting restrict the J1 range.

MR10-1450W carries 10 kg, for heavier torches, and mounts at any angle

One welding robot for 10 kg, with 1.45 m of reach



Rendering, family look

MR10-1450W

Supplied to order

10 kg payload	1,450 mm reach
±0.08 mm repeatability	160 kg robot weight

Axis	Max speed	Motion range
J1	240 °/s	±170°
J2	240 °/s	+90° / –155°
J3	200 °/s	+98° / –82°
J4	200 °/s	±170°
J5	360 °/s	±119°
J6	600 °/s	±220°

Protection	IP65	Power	3.8 kVA
Mounting	Any angle	Ambient	0–45 °C
Base	355 × 355 mm		
Wrist	J4 on request · J5 20 · J6 10 N·m		



Photo: manual MIG/MAG welding

Why weld with a robot

TWI gives typical duty cycles of about 45% for semi-automatic (hand-held) MIG/MAG welding and about 90% for automatic. That is about twice the arc time. The figure for your part comes from a trial.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Wall and angled mounting restrict the J1 range. Text: TWI: typical duty cycles, semi-automatic and automatic arc welding. Photo: manual MIG/MAG welding.

04

Light arms with up to 3.1 m of reach tend machines and move small parts

Long reach for their size, on a small base, so cells fit tight floors.

6–10 kg
payload

1.2–3.1 m
reach

4 models
6 axes

Where it works CNC and molding machine tending · Gluing, sealing and finishing · Water-based spraying



Robots shown are product renderings in Maknana livery.

MODEL	PAYLOAD	REACH, M
MR6-1200	6 kg	1.20
MR10-1650	10 kg	1.65
MR10-2030	10 kg	2.03
MR10-3100	10 kg	3.10

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR10-1650 repeats to ±0.05 mm, for precise tending in a small cell

MR10-1650 leads the family; the table compares all 4 models. A full card for each model is in the full catalog.



Rendering, family look

MR10-1650

Supplied to order

10 kg payload	1,650 mm reach
±0.05 mm repeatability	200 kg robot weight

Axis	Max speed	Motion range
J1	150 °/s	±165°
J2	145 °/s	+75° / –125°
J3	145 °/s	+145° / –75°
J4	300 °/s	±178°
J5	300 °/s	±125°
J6	500 °/s	±720°

Protection	IP65	Power	2.5 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	384 × 384 mm		
Wrist	J4 22 · J5 22 · J6 10 N·m		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR6-1200	6	1,200	0.05	70	IP65
MR10-1650	10	1,650	0.05	200	IP65
MR10-2030	10	2,030	0.05	210	IP65
MR10-3100	10	3,100	0.08	600	IP65

Shaded: the lead model on this page.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it. Wall and angled mounting restrict the J1 range.

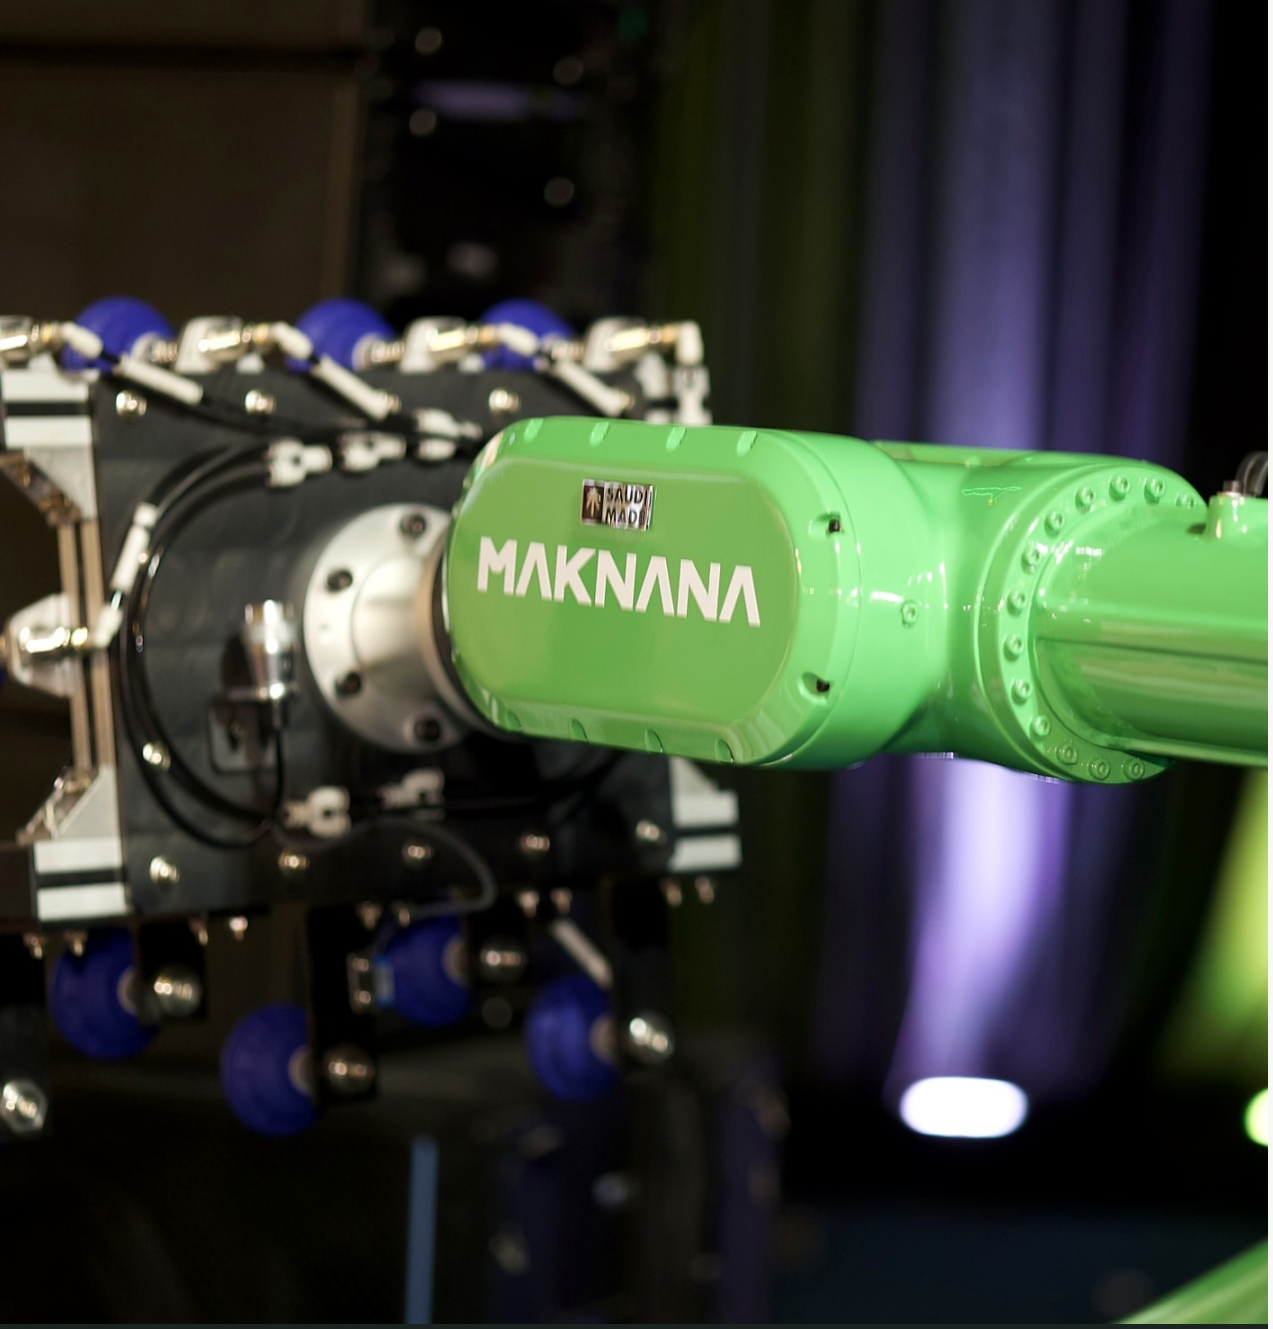


Photo: Maknana robot with a vacuum gripper

Each cell Maknana builds is assessed for risk and guarded before it ships

ISO 12100

Risk assessment of the whole cell

ISO 10218

Robot safety, parts 1 and 2

4 stages

Study, factory test, commissioning, service

Maknana designs the cell around the part: the fixtures, the grippers, the guarding and the controls.

The cell is guarded by fences, interlocked doors, light curtains and emergency stops.

Sources: ISO 12100 (risk assessment); ISO 10218-1 and ISO 10218-2 (robot safety); Maknana delivery method (2026).

05



Robots shown are product renderings in Maknana livery.

Medium-payload arms cover 20 to 125 kg, for tending, handling and finishing

The broadest family: eleven models, including a column-mounted four-axis lifter.

20–125 kg
payload

1.7–3.1 m
reach

11 models
4 and 6 axes

Where it works Machine tending of heavy parts · Case and part handling · Grinding and finishing

MODEL	PAYLOAD	REACH, M
MR20-1740	20 kg	1.74
MR20-2150	20 kg	2.15
MR25-1830	25 kg	1.83
MR25-1890	25 kg	1.89
MR30-1850	30 kg	1.85
MR50-2185	50 kg	2.19
MR80-2600	80 kg	2.60
MR120-1900V	120 kg	1.90
MR120-2270	120 kg	2.27
MR125-3100	125 kg	3.10
MR125-3100D	125 kg	3.10

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36. Models in production in bold and dark green.

MR50-2185 leads eleven medium-payload arms and is made in Riyadh

MR50-2185 leads the family; the table compares all 11 models. A full card for each model is in the full catalog.



Rendering, family look

MR50-2185

In production in Riyadh

50 kg payload	2,185 mm reach
±0.08 mm repeatability	550 kg robot weight

Axis	Max speed	Motion range
J1	109 °/s	±172°
J2	125 °/s	+72° / –140°
J3	140 °/s	+172° / –78°
J4	200 °/s	±360°
J5	210 °/s	+124° / –121°
J6	190 °/s	±360°

Protection	IP65	Power	5 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	630 × 570 mm		
Wrist	J4 185 · J5 185 · J6 126 N·m		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR20-1740	20	1,740	0.05	210	IP65
MR20-2150	20	2,150	0.06	250	IP65
MR25-1830	25	1,830	0.06	230	IP65
MR25-1890	25	1,890	0.06	290	IP65
MR30-1850	30	1,850	0.06	230	IP65
MR50-2185	50	2,185	0.08	550	IP65
MR80-2600	80	2,600	0.08	730	IP65
MR120-1900V	120	1,900	0.06	1,540	IP65
MR120-2270	120	2,270	0.08	720	IP65
MR125-3100	125	3,100	0.06	1,480	IP65
MR125-3100D	125	3,100	0.05	1,110	IP65

Shaded: the lead model on this page. Bold: models in production in Riyadh.

Sources: Maknana MR-Series datasheets (2026); manufacturer datasheets held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it. Wall and angled mounting restrict the J1 range. MR25-1830 and MR120-1900V: Maknana range data (2026).

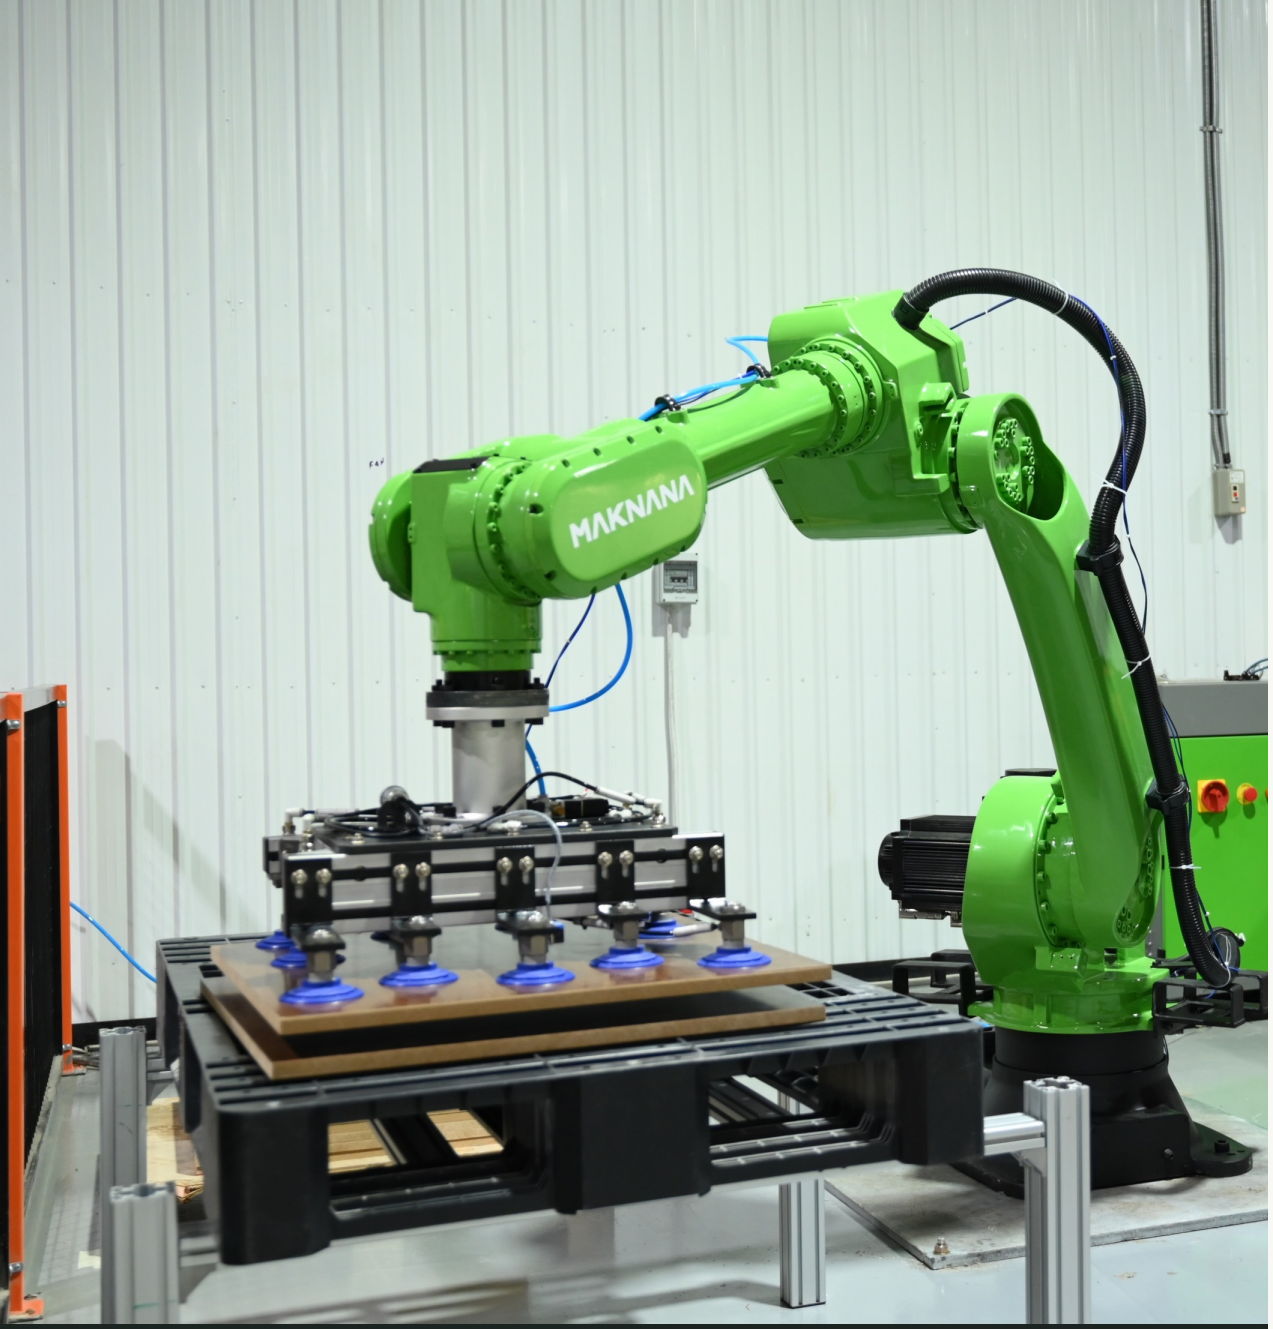


Photo: MR50 palletizing cell, Riyadh facility

MR50-2185, made in Riyadh, carries 50 kg with its gripper included

50 kg

Rated payload at the flange, gripper included

2,185 mm

Reach

±0.08 mm

Repeatability

One of the three models in production in Riyadh. 50 kg rated payload at the flange, including the gripper; bags up to about 25 kg with a light gripper.

Medium-payload family: page 16.

Source: Maknana MR-Series datasheet, MR50-2185 (2026).

06

High-payload arms carry 210 to 310 kg with up to 3.1 m of reach

For heavy fixtures, molds and castings that need a full six-axis turn.



Robots shown are product renderings in Maknana livery.

210–310 kg	2.7–3.1 m	2 models
payload	reach	6 axes

Where it works Mold and fixture handling · Grinding and sanding of heavy parts · Engine blocks and castings

MODEL	PAYLOAD	REACH, M
MR210-2650	210 kg	2.65
MR310-3100	310 kg	3.10

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR210-2650 carries 210 kg to 2.65 m, with a wrist rated to 1,300 N·m

One high-payload robot for 210 kg, with 2.65 m of reach



Rendering, family look

MR210-2650

Supplied to order

210 kg payload	2,650 mm reach
±0.12 mm repeatability	1,460 kg robot weight

Axis	Max speed	Motion range
J1	110 °/s	±180°
J2	80 °/s	+50° / –75°
J3	95 °/s	+90° / –70°
J4	155 °/s	±185°
J5	205 °/s	±120°
J6	300 °/s	±360°

Protection	IP65	Power	7.5 kVA
Mounting	Floor	Ambient	0–45 °C
Base	750 × 520 mm		
Wrist	J4 1,300 · J5 1,300 · J6 700 N·m		

ALSO AVAILABLE

Supplied to order. Full datasheet values with the quotation.

MR310-3100

Six axes, wrist IP67

310 kg payload	3,100 mm reach	±0.06 mm repeatability	1,970 kg robot weight

WITH THE QUOTATION

Speed and motion range for each axis
Wrist moment and inertia, and the load diagram
Work envelope and base drawings
Power, mounting and ambient conditions

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Also available: Maknana range data (2026); datasheet values with the quotation.



Photo: laser cutting on the transformer tank line

APPLICATION | TRANSFORMER TANKS

A transformer tank line raised output by 40%, to 140 tanks a month

100 → 140

Tanks a month (+40%)

12% → 3%

Weld defect rate, as recorded by the customer

8 → 3

8 welders a shift became 3 operators a shift

Customer: a transformer manufacturer. The line: fin forming, laser cutting and bending, robotic welding, blasting, pretreatment, powder coating and curing. Results are for the whole line.

These cells were delivered in 2024–25 on partner robots, before the MR-Series launch in September 2026. MR-Series robots now go into the same cells.

Sources: Maknana company post (2025), from the customer's production records. Percent change: our arithmetic.

07

Heavy handling arms lift loads from half a tonne to 6 tonnes

Floor-mounted six-axis arms for parts that people should never lift: beams, coils, castings and large frames.

500–6,000 kg
payload

2.9–4.6 m
reach

11 models
6 axes



Robots shown are product renderings in Maknana livery.

Where it works Foundry and steel handling · Rail, energy and heavy-equipment parts · Loading of large machine tools

MODEL	PAYLOAD	REACH, M
MR500-3270	500 kg	3.27
MR800-2850	800 kg	2.85
MR1200-3760	1,200 kg	3.76
MR1500-3870	1,500 kg	3.87
MR1800-4600	1,800 kg	4.60
MR2000-4000	2,000 kg	4.00
MR2400-3760	2,400 kg	3.76
MR3000-3760	3,000 kg	3.76
MR4000-4200	4,000 kg	4.20
MR5000-3700	5,000 kg	3.70
MR6000-3280	6,000 kg	3.28

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR1200-3760 carries 1.2 tonnes at ±0.2 mm, the tightest of the heavy arms

MR1200-3760 leads the family; the table compares all 11 models. A full card for each model is in the full catalog.



Rendering, family look

MR1200-3760

Supplied to order

1,200 kg payload	3,760 mm reach
±0.2 mm repeatability	7,170 kg robot weight

Axis	Max speed	Motion range
J1	45 °/s	±180°
J2	30 °/s	+50° / –90°
J3	30 °/s	+20° / –126°
J4	50 °/s	±360°
J5	50 °/s	±115°
J6	70 °/s	±360°

Protection	IP65, wrist IP67	Power	16 kVA
Mounting	Floor	Ambient	0–45 °C
Base	1,180 × 1,180 mm		
Wrist	on request		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR500-3270	500	3,270	0.3	2,780	IP65, wrist IP67
MR800-2850	800	2,850	0.3	2,960	IP65, wrist IP67
MR1200-3760	1,200	3,760	0.2	7,170	IP65, wrist IP67
MR1500-3870	1,500	3,870	0.23	11,200	IP65, wrist IP67
MR1800-4600	1,800	4,600	0.3	17,880	IP65, wrist IP67
MR2000-4000	2,000	4,000	0.3	on request	IP65, wrist IP67
MR2400-3760	2,400	3,760	0.3	on request	IP65, wrist IP67
MR3000-3760	3,000	3,760	0.32	17,660	IP65, wrist IP67
MR4000-4200	4,000	4,200	0.3	19,180	IP65, wrist IP67
MR5000-3700	5,000	3,700	0.3	18,970	IP65, wrist IP67
MR6000-3280	6,000	3,280	0.3	18,690	IP65, wrist IP67

Shaded: the lead model on this page.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it.

A welding cell cut the cycle for a pump base from 15 to 8 minutes

Customer: a pump maker in the Kingdom. The cell: one welding robot and one rotating positioner.

These cells were delivered in 2024–25 on partner robots, before the MR-Series launch in September 2026. MR-Series robots now go into the same cells. Published with the customer's approval.



Photo: a Maknana welding cell of the same type, Riyadh facility

15 → 8

Minutes per pump base

–47%

Cycle time per base

Up to 60

Bases in a 480-minute shift, against 32 at 15 minutes

Sources: Maknana deployment analysis (August 2025); bases per shift and percent change: our arithmetic.

08

Four-axis palletizers stack sacks and cases and keep every layer level

Four axes hold the wrist level, so every layer lands square.

50–300 kg
payload

2.2–3.3 m
reach

5 models
4 axes



Robots shown are product renderings in Maknana livery.

Where it works Cement, fertilizer and polymer sacks · Water, beverage and date cases · End-of-line stacking

MODEL	PAYLOAD	REACH, M
MR50-2220P	50 kg	2.22
MR130-2740P	130 kg	2.74
MR180-3250P	180 kg	3.25
MR210-3200P	210 kg	3.20
MR300-3200P	300 kg	3.20

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR180-3250P reaches 3.25 m, the longest of the palletizers to 300 kg

MR180-3250P leads the family; the table compares all 5 models. A full card for each model is in the full catalog.



Rendering, family look

MR180-3250P

Supplied to order

180 kg payload	3,250 mm reach
±0.25 mm repeatability	1,380 kg robot weight

Axis	Max speed	Motion range
J1	105 °/s	±180°
J2	105 °/s	+45° / –90°
J3	105 °/s	+110° / –75°
J4	260 °/s	±360°

Protection	IP65	Power	6.5 kVA
Mounting	Floor	Ambient	0–45 °C
Base	750 × 520 mm		
Wrist	J4 1,760 N·m		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR50-2220P	50	2,220	0.2	620	IP65
MR130-2740P	130	2,740	0.25	1,160	IP65, wrist IP67
MR180-3250P	180	3,250	0.25	1,380	IP65
MR210-3200P	210	3,200	0.3	1,950	IP65, wrist IP67
MR300-3200P	300	3,200	0.15	1,950	IP65, wrist IP67

Shaded: the lead model on this page.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it.

The gripper counts against the payload, so it is designed with the part

Rated payload at the flange, including the gripper, within the wrist load diagram.

Maknana designs vacuum or finger grippers in the application study, with the fixtures and the guarding.

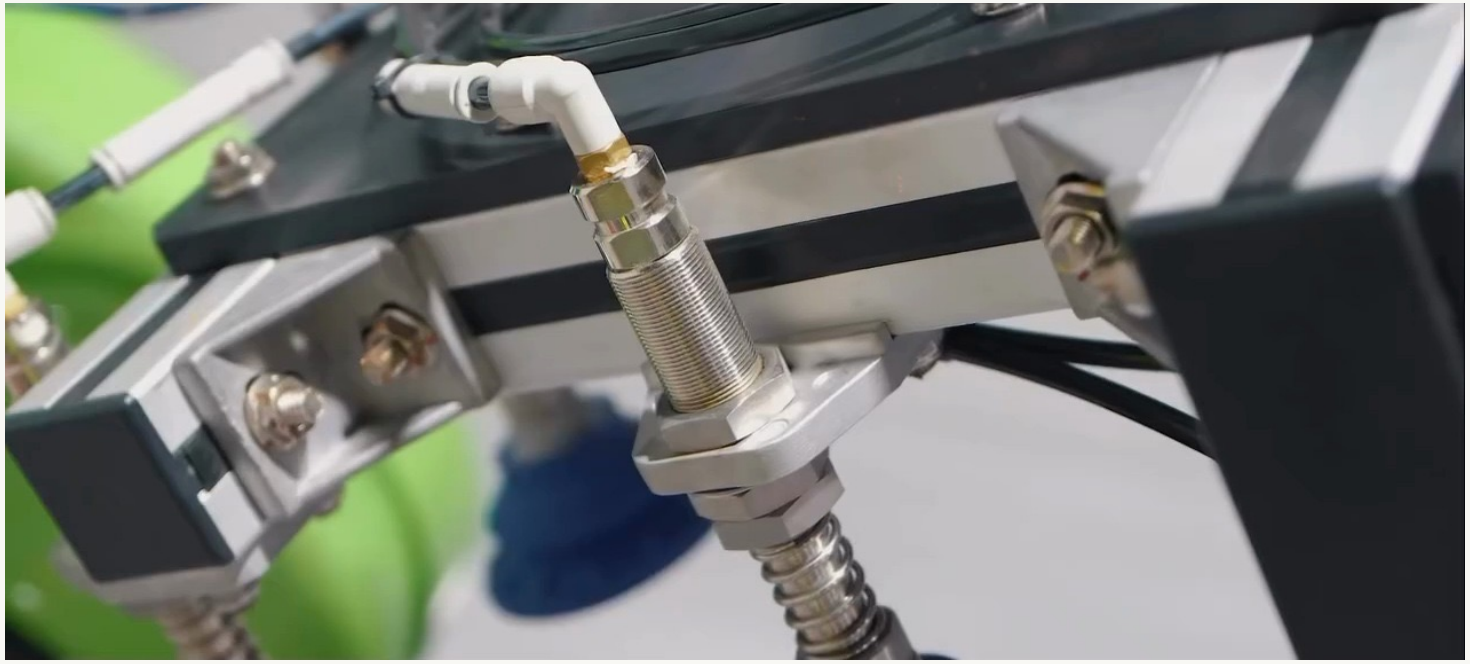


Photo: gripper on a Maknana cell, Riyadh facility

Part + gripper

The weight to compare with the rated payload

Center of gravity

Checked against the wrist load diagram

Vacuum or fingers

Chosen for the part's shape and surface

Sources: manufacturer datasheets (payload definition); Maknana delivery method (2026).

09

Press-tending robots carry blanks from press to press

Four-axis arms built for short, fast transfers on sheet-metal lines.

15–40 kg	1.6–1.9 m	4 models
payload	reach	4 axes

Where it works Press-to-press transfer · Blank loading and part unloading · Appliance, HVAC and auto parts



Robots shown are product renderings in Maknana livery.

MODEL	PAYLOAD	REACH, M
MR15-1610S	15 kg	1.61
MR25-1770S	25 kg	1.77
MR25-1900S	25 kg	1.90
MR40-1900S	40 kg	1.90

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR25-1770S moves 25 kg blanks between presses, at up to 175 °/s

MR25-1770S leads the family; the table compares all 4 models. A full card for each model is in the full catalog.



Rendering, family look

MR25-1770S

Supplied to order

25 kg payload	1,770 mm reach
±0.07 mm repeatability	260 kg robot weight

Axis	Max speed	Motion range
J1	130 °/s	±175°
J2	105 °/s	+48° / –95°
J3	135 °/s	+80° / –75°
J4	175 °/s	±360°

Protection	IP65	Power	3 kVA
Mounting	Floor, wall or ceiling	Ambient	0–45 °C
Base	370 × 370 mm		
Wrist	J4 880 N·m		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR15-1610S	15	1,610	0.06	180	IP65
MR25-1770S	25	1,770	0.07	260	IP65
MR25-1900S	25	1,900	0.08	260	IP65
MR40-1900S	40	1,900	0.07	260	IP65

Shaded: the lead model on this page.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it. Wall and angled mounting restrict the J1 range.



Photo: radiator fins formed on the transformer tank line

One supplier provides the robot, the machine, the integration and the service

Robots

Nine families, 6 kg to 6 tonnes

Machines

CNC machinery supplied in the region

Lines

Forming, cutting, welding and finishing as one line

The transformer tank line combined fin forming, laser cutting and bending, robotic welding, blasting, pretreatment, powder coating and curing.

Sources: Maknana company information (company-stated); customer's production records (2025).

10

Heavy four-axis robots palletize and transfer up to 6 tonnes

Thirteen floor-mounted models for the heaviest end-of-line and transfer jobs.

500–6,000 kg
payload

3.2–4.6 m
reach

13 models
4 axes



Robots shown are product renderings in Maknana livery.

Where it works Heavy end-of-line stacking · Coil and billet transfer · Large-part stacking

MODEL	PAYLOAD	REACH, M
MR500-3180P	500 kg	3.18
MR600-3500P	600 kg	3.50
MR800-3180P	800 kg	3.18
MR800-4000P	800 kg	4.00
MR1200-4360P	1,200 kg	4.36
MR1200-4600P	1,200 kg	4.60
MR1600-3970P	1,600 kg	3.97
MR2000-4090P	2,000 kg	4.09
MR2400-4200P	2,400 kg	4.20
MR3000-4200P	3,000 kg	4.20
MR4000-4600P	4,000 kg	4.60
MR5000-3990P	5,000 kg	3.99
MR6000-3700P	6,000 kg	3.70

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Rounding: page 36.

MR1200-4600P carries 1.2 tonnes as far as 4.6 m

MR1200-4600P leads the family; the table compares all 13 models. A full card for each model is in the full catalog.



Rendering, family look

MR1200-4600P

Supplied to order

1,200 kg payload	4,600 mm reach
±0.5 mm repeatability	7,190 kg robot weight

Axis	Max speed	Motion range
J1	50 °/s	±180°
J2	50 °/s	+50° / –90°
J3	55 °/s	+23° / –115°
J4	115 °/s	±360°

Protection	IP65, wrist IP67	Power	14.5 kVA
Mounting	Floor	Ambient	0–45 °C
Base	1,180 × 1,180 mm		
Wrist	J4 8,820 N·m		

Model	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection
MR500-3180P	500	3,180	0.3	on request	IP65, wrist IP67
MR600-3500P	600	3,500	0.2	on request	IP65, wrist IP67
MR800-3180P	800	3,180	0.5	2,970	IP65, wrist IP67
MR800-4000P	800	4,000	0.3	3,100	IP65, wrist IP67
MR1200-4360P	1,200	4,360	0.5	6,300	IP65, wrist IP67
MR1200-4600P	1,200	4,600	0.5	7,190	IP65, wrist IP67
MR1600-3970P	1,600	3,970	0.8	6,120	IP65, wrist IP67
MR2000-4090P	2,000	4,090	0.8	10,460	IP65, wrist IP67
MR2400-4200P	2,400	4,200	0.8	12,590	IP65, wrist IP67
MR3000-4200P	3,000	4,200	0.8	12,600	IP65, wrist IP67
MR4000-4600P	4,000	4,600	0.9	17,220	IP65, wrist IP67
MR5000-3990P	5,000	3,990	1.0	17,120	IP65, wrist IP67
MR6000-3700P	6,000	3,700	1.0	16,690	IP65, wrist IP67

Shaded: the lead model on this page.

Source: manufacturer datasheets, 2023–2026, held by Maknana. Rounding: page 36. Weight on request where the datasheets disagree or do not give it.

One team in Riyadh commissions, trains, stocks spares and services the robots it supplies



1 Application study

Layout, 3D simulation, cycle time and price before you commit

2 Factory acceptance

The cell runs in Riyadh before it ships

3 Commissioning and training

On site, until the crew runs the cell on its own

4 Spares and service

Riyadh spares stock and a lifecycle service contract

Source: Maknana delivery method (2026). Each gate is signed by the customer before the next stage starts. Photo: Maknana crew, Riyadh facility.

Specification index: robots from 6 kg to 310 kg

Model	Axes	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection	Page
MR7-740C	6	7	740	0.04	50	IP65	9
MR8-960C	6	8	960	0.05	70	IP65	9
MR6-1400	6	6	1,440	0.05	150	IP65	11
MR6-2080	6	6	2,080	0.08	280	IP65	11
MR10-1450W	6	10	1,450	0.08	160	IP65	12
MR6-1200	6	6	1,200	0.05	70	IP65	14
MR10-1650	6	10	1,650	0.05	200	IP65	14
MR10-2030	6	10	2,030	0.05	210	IP65	14
MR10-3100	6	10	3,100	0.08	600	IP65	14

Model	Axes	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection	Page
MR20-1740	6	20	1,740	0.05	210	IP65	17
MR20-2150	6	20	2,150	0.06	250	IP65	17
MR25-1830	6	25	1,830	0.06	230	IP65	17
MR25-1890	6	25	1,890	0.06	290	IP65	17
MR30-1850	6	30	1,850	0.06	230	IP65	17
MR50-2185	6	50	2,185	0.08	550	IP65	17
MR80-2600	6	80	2,600	0.08	730	IP65	17
MR120-1900V	4	120	1,900	0.06	1,540	IP65	17
MR120-2270	6	120	2,270	0.08	720	IP65	17
MR125-3100	6	125	3,100	0.06	1,480	IP65	17
MR125-3100D	6	125	3,100	0.05	1,110	IP65	17
MR210-2650	6	210	2,650	0.12	1,460	IP65	20
MR310-3100	6	310	3,100	0.06	1,970	IP65, wrist IP67	20

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Reach and weight rounded to 10 mm and 10 kg, except the three models in production (in bold). Weight on request where datasheet editions differ. Page = the model's page in this catalog.

Specification index: heavy handling and four-axis robots to 6 tonnes

Model	Axes	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection	Page
MR500-3270	6	500	3,270	0.3	2,780	IP65, wrist IP67	23
MR800-2850	6	800	2,850	0.3	2,960	IP65, wrist IP67	23
MR1200-3760	6	1,200	3,760	0.2	7,170	IP65, wrist IP67	23
MR1500-3870	6	1,500	3,870	0.23	11,200	IP65, wrist IP67	23
MR1800-4600	6	1,800	4,600	0.3	17,880	IP65, wrist IP67	23
MR2000-4000	6	2,000	4,000	0.3	on request	IP65, wrist IP67	23
MR2400-3760	6	2,400	3,760	0.3	on request	IP65, wrist IP67	23
MR3000-3760	6	3,000	3,760	0.32	17,660	IP65, wrist IP67	23
MR4000-4200	6	4,000	4,200	0.3	19,180	IP65, wrist IP67	23
MR5000-3700	6	5,000	3,700	0.3	18,970	IP65, wrist IP67	23
MR6000-3280	6	6,000	3,280	0.3	18,690	IP65, wrist IP67	23
MR50-2220P	4	50	2,220	0.2	620	IP65	26
MR130-2740P	4	130	2,740	0.25	1,160	IP65, wrist IP67	26
MR180-3250P	4	180	3,250	0.25	1,380	IP65	26
MR210-3200P	4	210	3,200	0.3	1,950	IP65, wrist IP67	26
MR300-3200P	4	300	3,200	0.15	1,950	IP65, wrist IP67	26

Model	Axes	Payload, kg	Reach, mm	Repeat., ±mm	Weight, kg	Protection	Page
MR15-1610S	4	15	1,610	0.06	180	IP65	29
MR25-1770S	4	25	1,770	0.07	260	IP65	29
MR25-1900S	4	25	1,900	0.08	260	IP65	29
MR40-1900S	4	40	1,900	0.07	260	IP65	29
MR500-3180P	4	500	3,180	0.3	on request	IP65, wrist IP67	32
MR600-3500P	4	600	3,500	0.2	on request	IP65, wrist IP67	32
MR800-3180P	4	800	3,180	0.5	2,970	IP65, wrist IP67	32
MR800-4000P	4	800	4,000	0.3	3,100	IP65, wrist IP67	32
MR1200-4360P	4	1,200	4,360	0.5	6,300	IP65, wrist IP67	32
MR1200-4600P	4	1,200	4,600	0.5	7,190	IP65, wrist IP67	32
MR1600-3970P	4	1,600	3,970	0.8	6,120	IP65, wrist IP67	32
MR2000-4090P	4	2,000	4,090	0.8	10,460	IP65, wrist IP67	32
MR2400-4200P	4	2,400	4,200	0.8	12,590	IP65, wrist IP67	32
MR3000-4200P	4	3,000	4,200	0.8	12,600	IP65, wrist IP67	32
MR4000-4600P	4	4,000	4,600	0.9	17,220	IP65, wrist IP67	32
MR5000-3990P	4	5,000	3,990	1.0	17,120	IP65, wrist IP67	32
MR6000-3700P	4	6,000	3,700	1.0	16,690	IP65, wrist IP67	32

Sources: manufacturer datasheets, 2023–2026 (current edition), held by Maknana; Maknana MR-Series datasheets (2026). A Maknana datasheet comes with each quotation. Reach and weight rounded to 10 mm and 10 kg. Weight on request where datasheet editions differ. Page = the model's page in this catalog.

Ten terms explain every number in this catalog

Axis (J1–J6)	One joint of the robot. J1 turns the base; J6 turns the tool.
Reach	Distance from the base axis to the wrist center at full stretch.
IP65 / IP67	Protection against dust and water jets / short immersion (IEC 60529).
Wrist moment	The turning force the wrist axes can hold, in N·m; it limits how far the load may sit from the flange.
Cell	Robot plus fixtures, tools, guarding and controls, delivered as one working unit.
Payload	Maximum load at the wrist flange, including the tool, within the load diagram.
Repeatability	Spread of positions when the robot returns to one taught point (as defined in ISO 9283).
Four-axis robot	Keeps the tool level; used for palletizing and press transfer.
Power (kVA)	Supply rating of the robot, not its energy use.
Factory acceptance test	The test run in Riyadh before the cell ships.

How values are rounded. Models in production show Maknana's published values. For the other models: reach and weight to 10 (matching the model code), speeds down to 5 °/s (1 °/s below 50), motion ranges and wrist ratings down to whole units, the more conservative repeatability and protection rating, and the lower speed, where datasheet editions differ; reach and power follow the current edition. Weight or wrist values are "on request" where the datasheets disagree or do not give them.

Sources: ISO 8373 (robot vocabulary); ISO 9283; IEC 60529; manufacturer datasheets held by Maknana.

MAKNANA

Tell us the part and the cycle time. We will show you the cell.



Maknana
Riyadh Second Industrial City, Riyadh, Saudi Arabia
+966 11 450 5977 | info@maknana.sa | maknana.sa

MAKNANA | SAUDI MADE

Robot shown is a product rendering in Maknana livery.