




$$ack_prep = 0$$



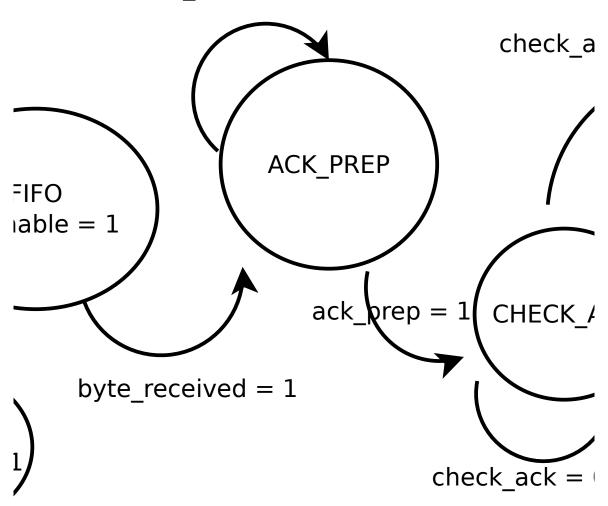

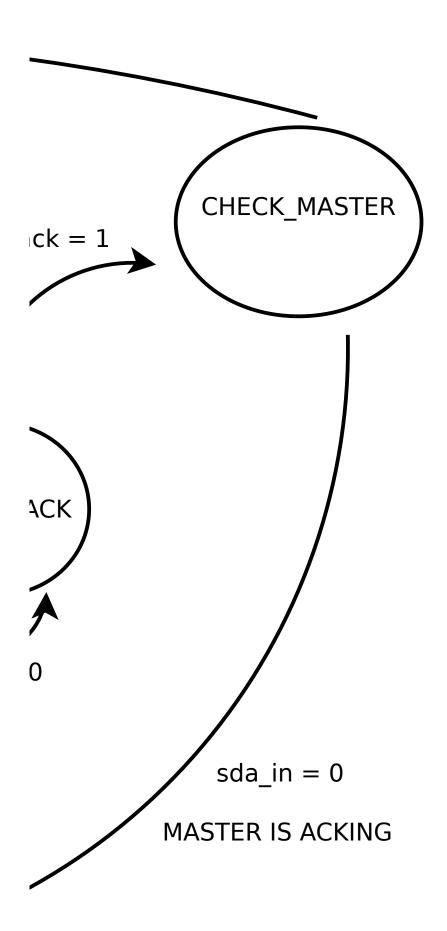

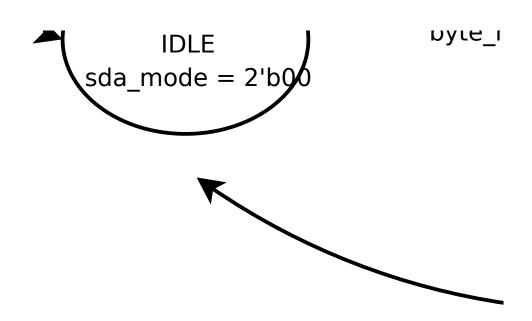

NACK sd_mode = 2'b10

READ_EN read_enable = 1