




Threaded-Stud Bumper

SBR Rubber, 6-32 Thread Size, 1/4" Thread Length, 1/2" OD

\$6.83 per pack of 25


9541K1



| | |
|-----------------------|--------------------------------|
| Style | 2 |
| Mount Type | Threaded Stud |
| System of Measurement | Inch |
| Shape | Round |
| Material | SBR Rubber |
| Thread | |
| Size | 6-32 |
| Length | 1/4" |
| OD | 1/2" |
| Height | 1/4" |
| Counterbore Diameter | 1/4" |
| Temperature Range | -20° to 180° F |
| For Use Outdoors | No |
| Hardness Rating | Hard |
| Hardness | Durometer 70A |
| Nonmarking | Yes |
| Color | Black |
| Stud Material | Steel |
| RoHS | RoHS 3 (2015/863/EU) compliant |

Twist these bumpers into a threaded hole. Often used as feet, spacers, and vibration dampers, they absorb shock to prevent damage to equipment and surfaces. All have a hard or medium-hard rating to withstand high levels of impact. The harder the bumper, the more impact it withstands.

SBR bumpers have good abrasion resistance. They're also nonmarking. They are not for use outdoors.

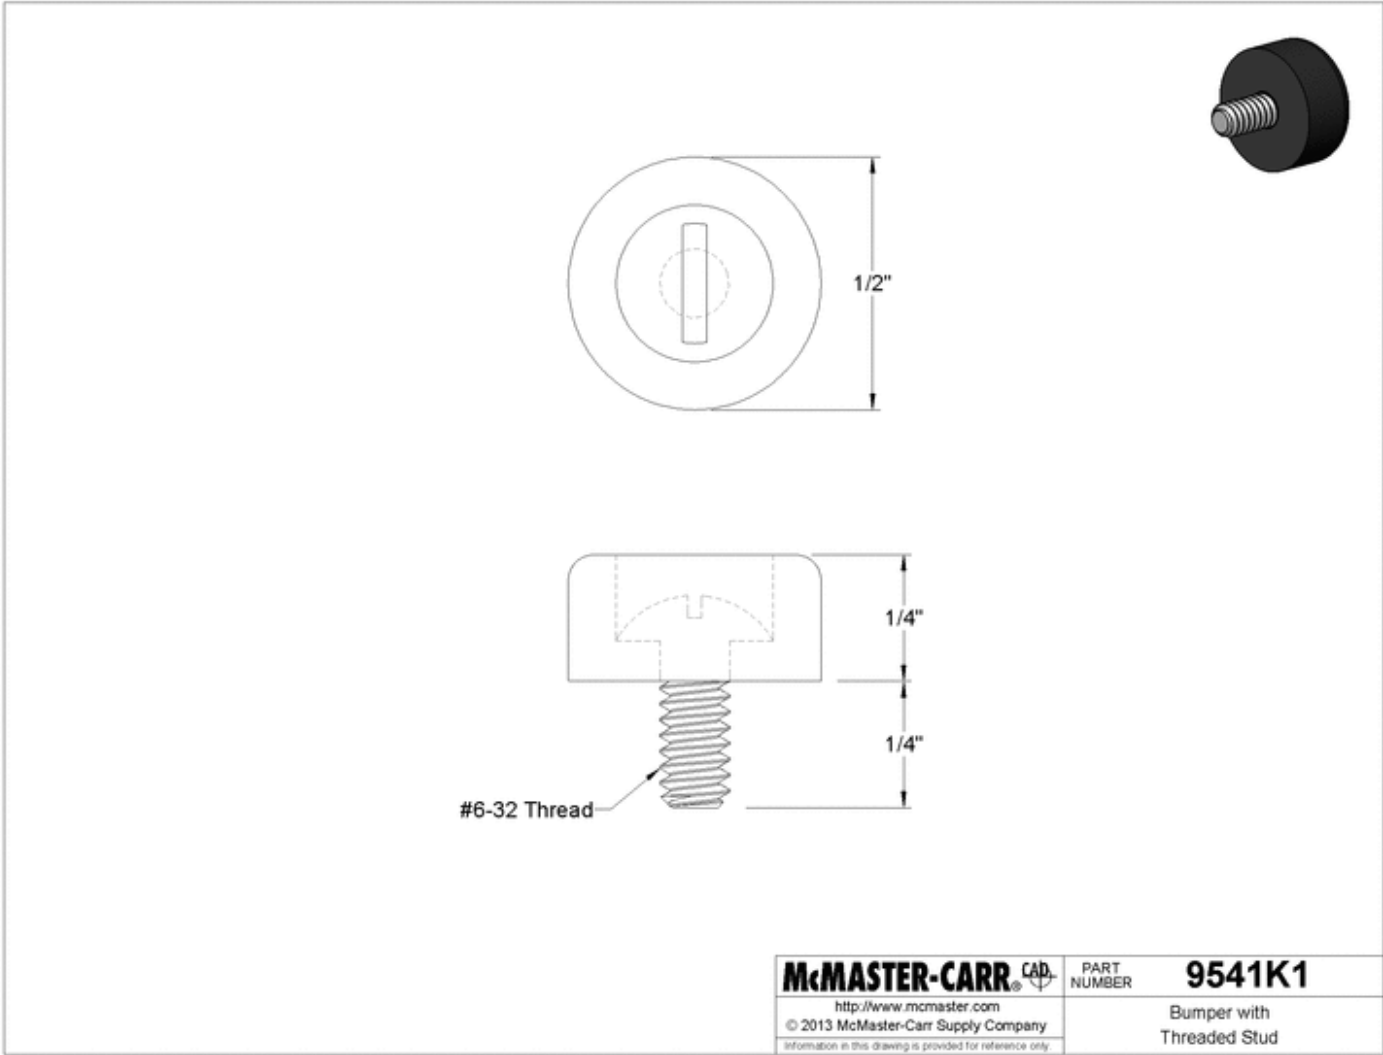

The information in this 3-D model is provided for reference only.