



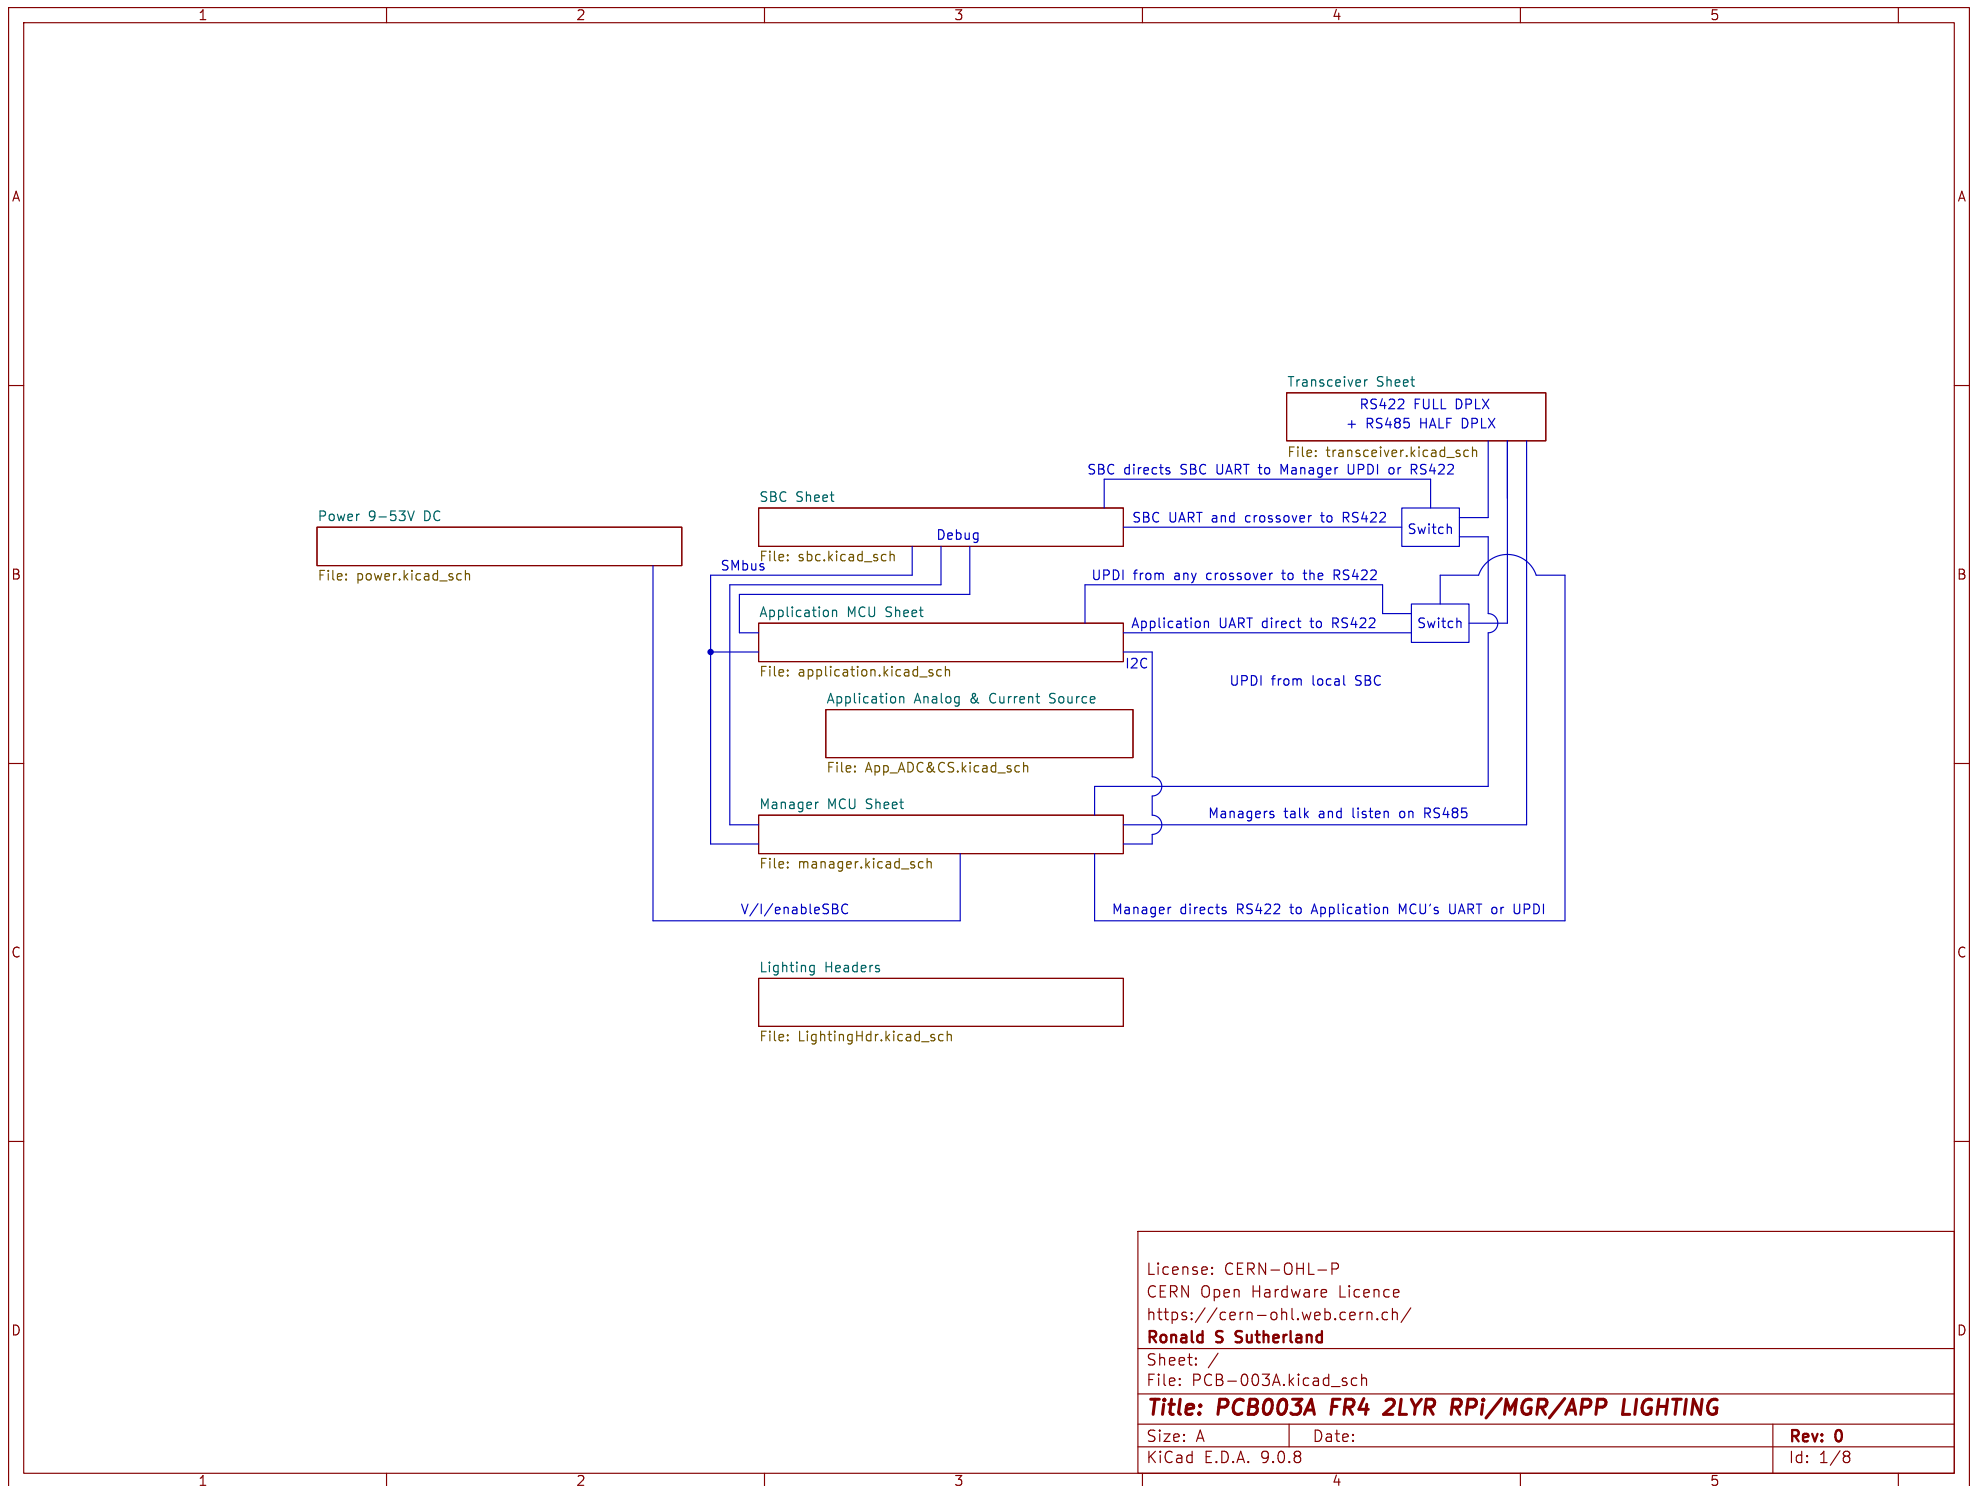
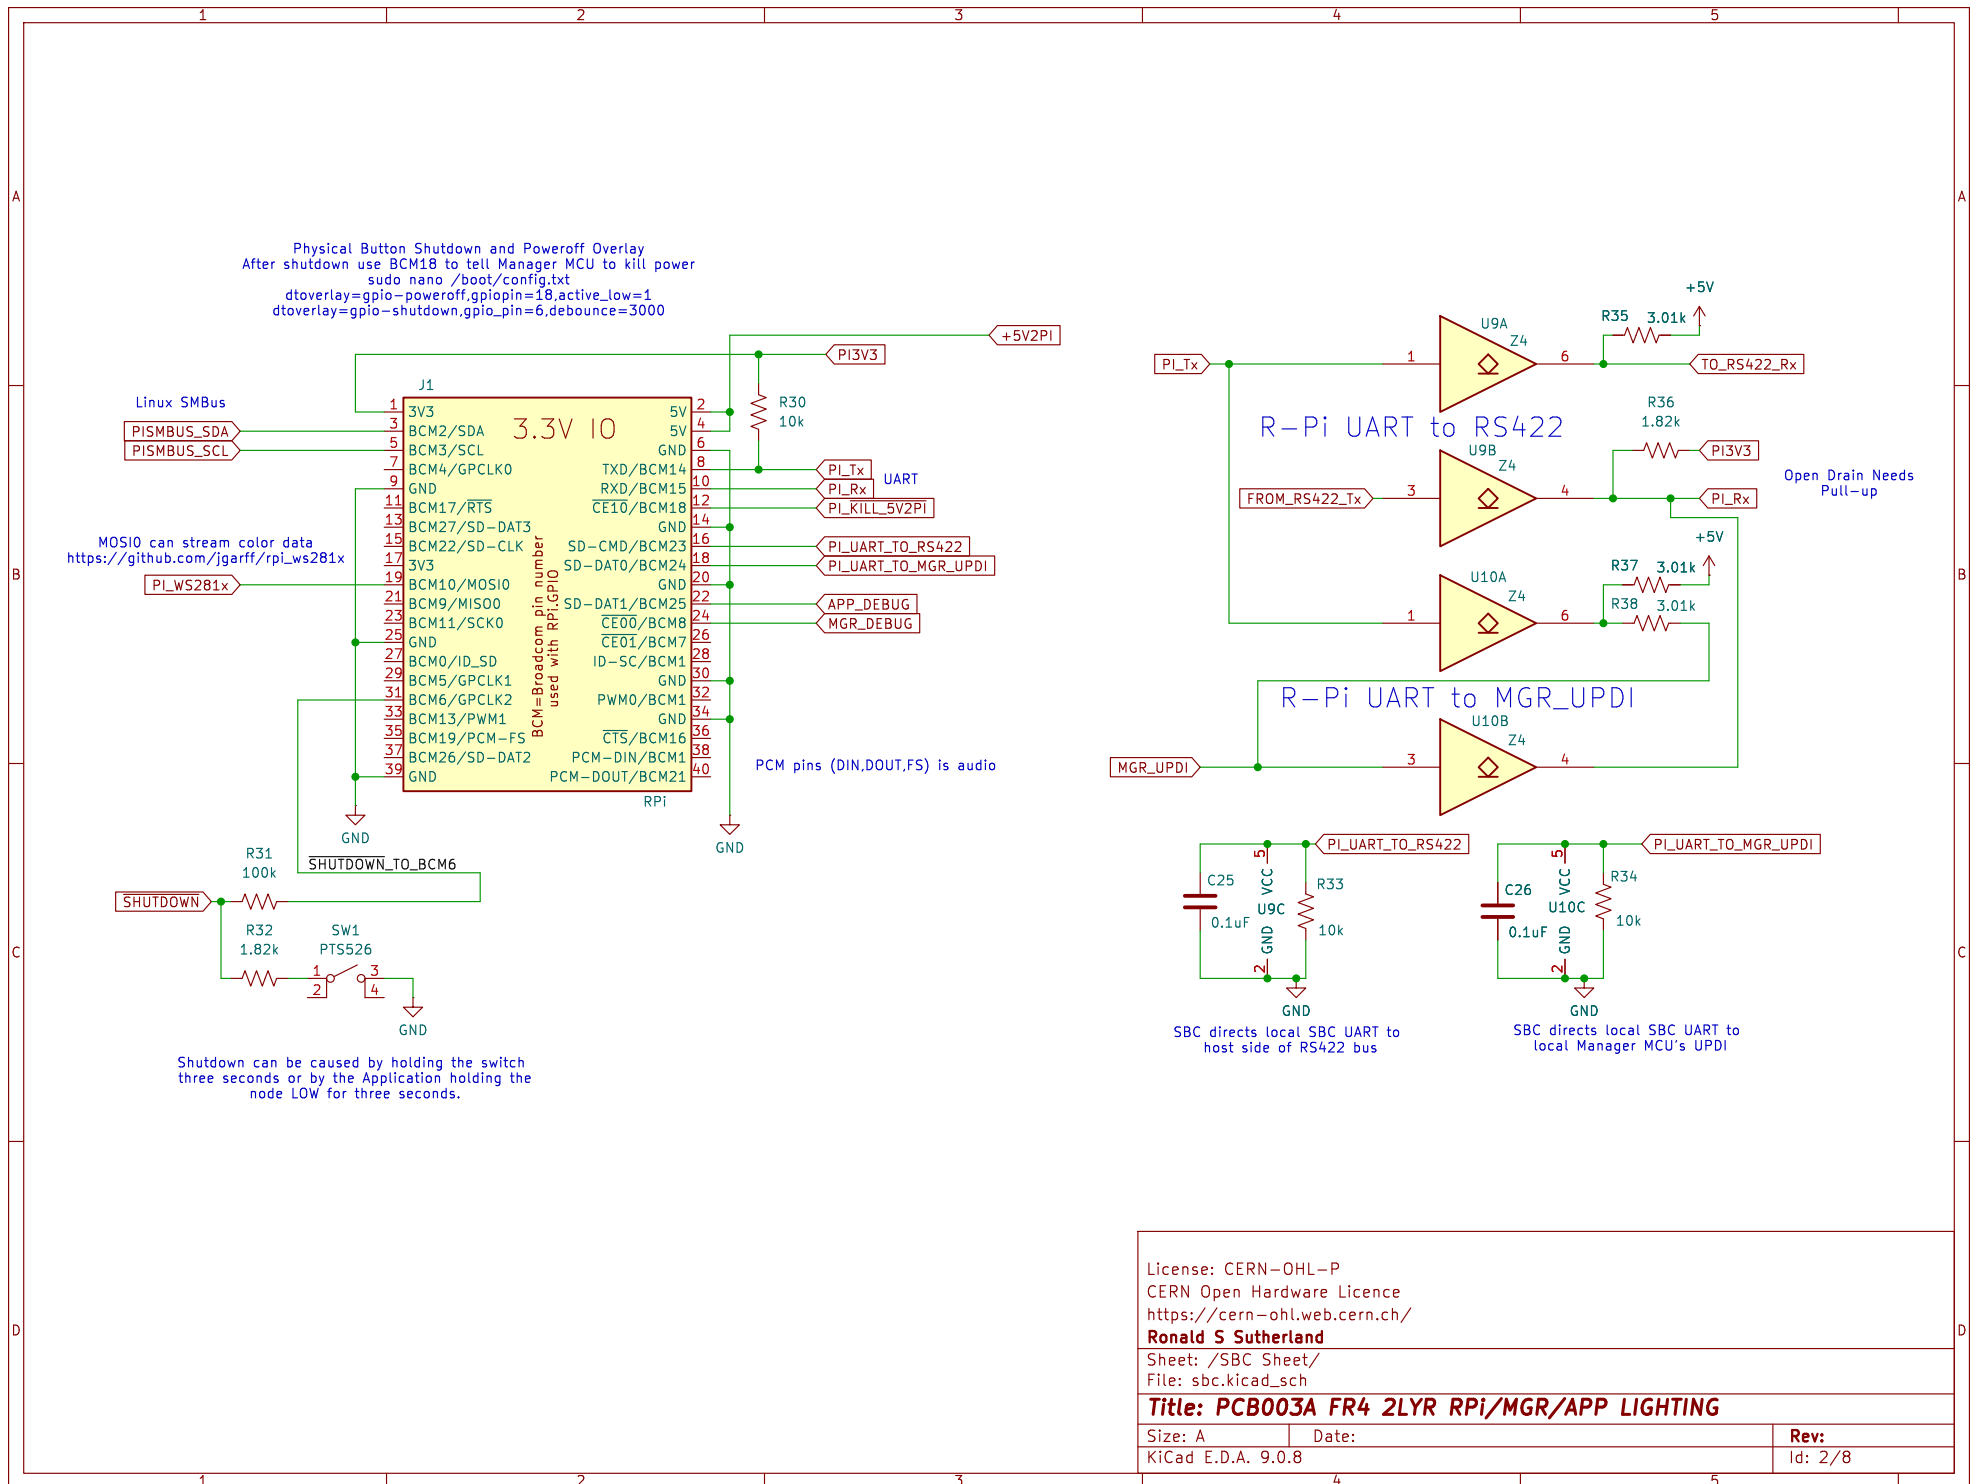
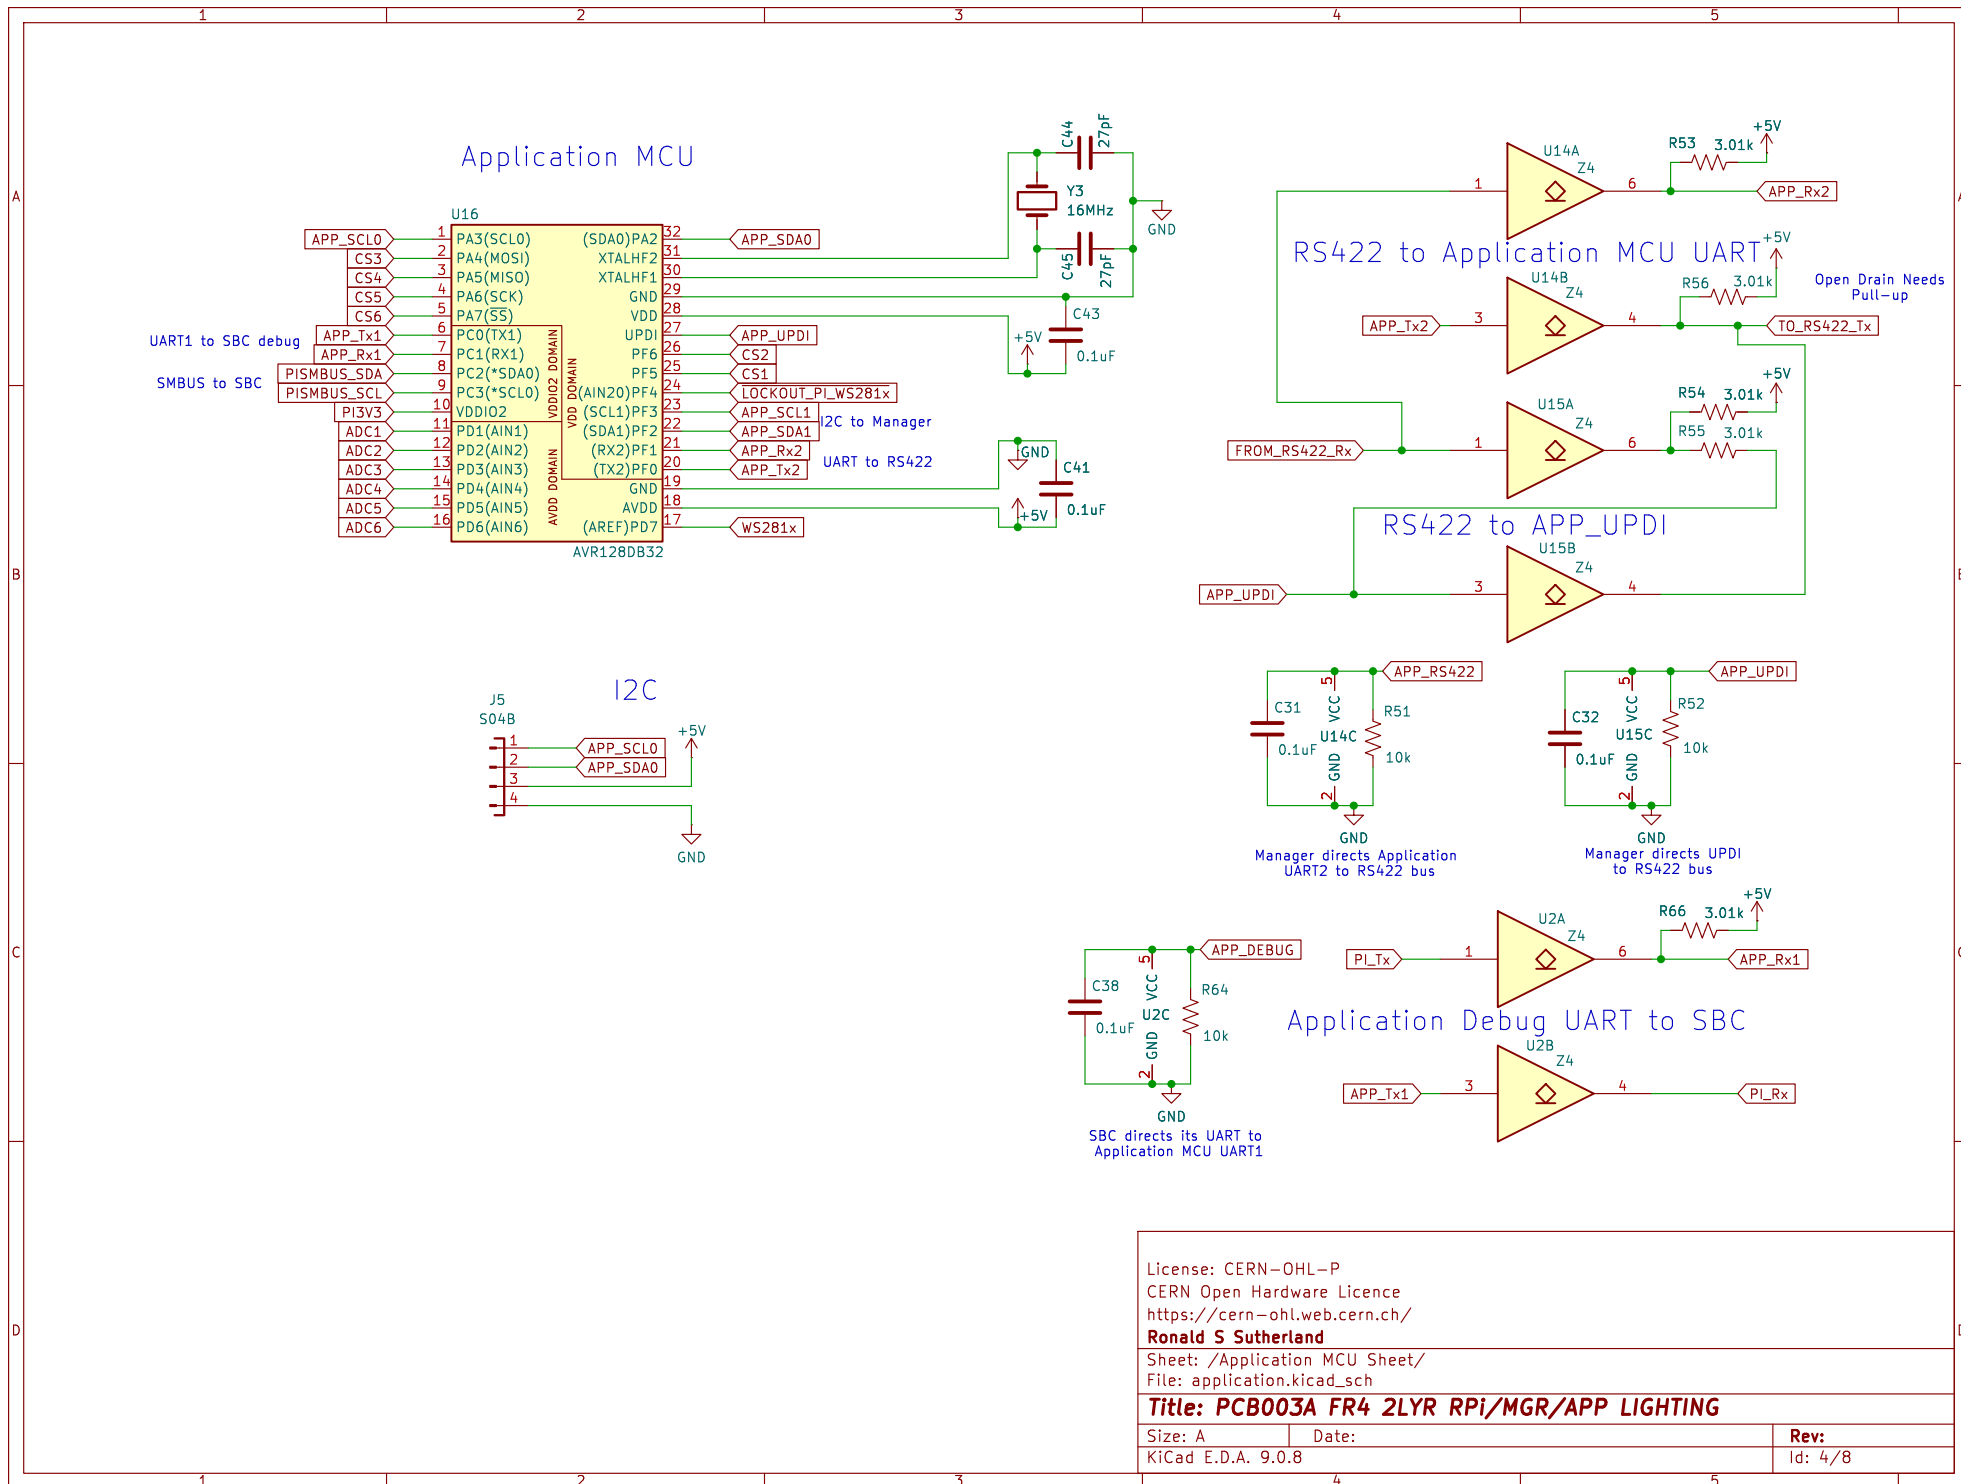
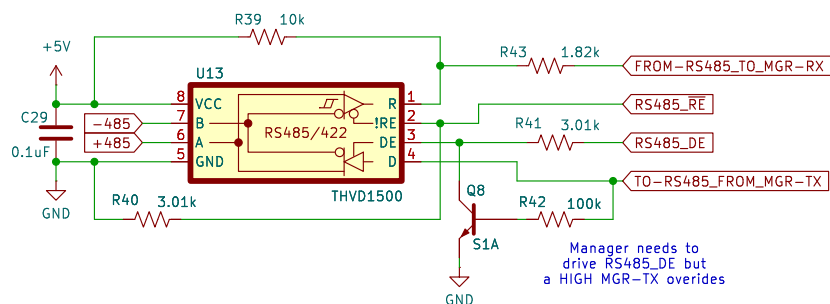


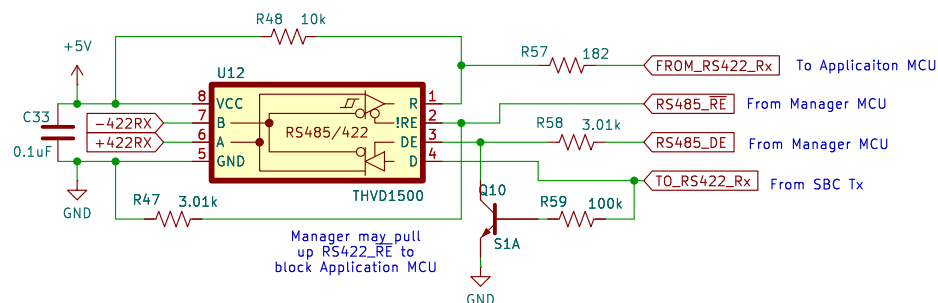

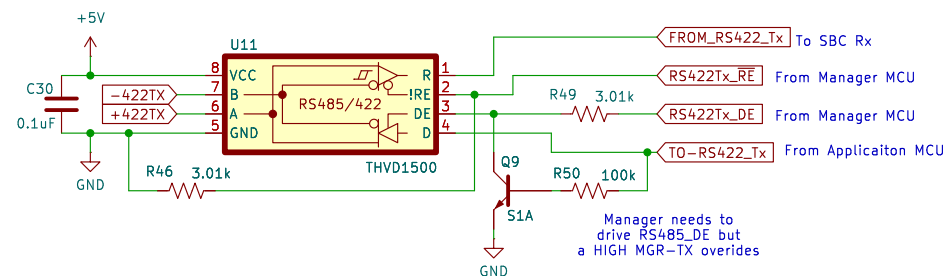

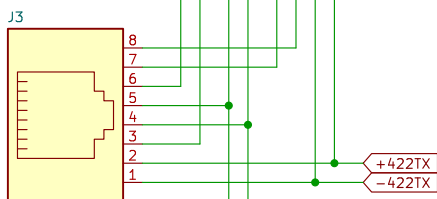

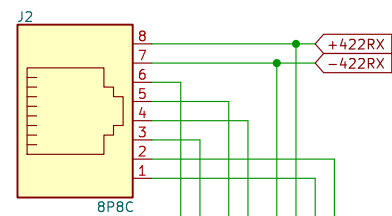

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Transceiver Sheet/
File: transceiver.kicad_sch

Title: PCB003A FR4 2LYR RPi/MGR/APP LIGHTING



Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.8

Id: 6/8

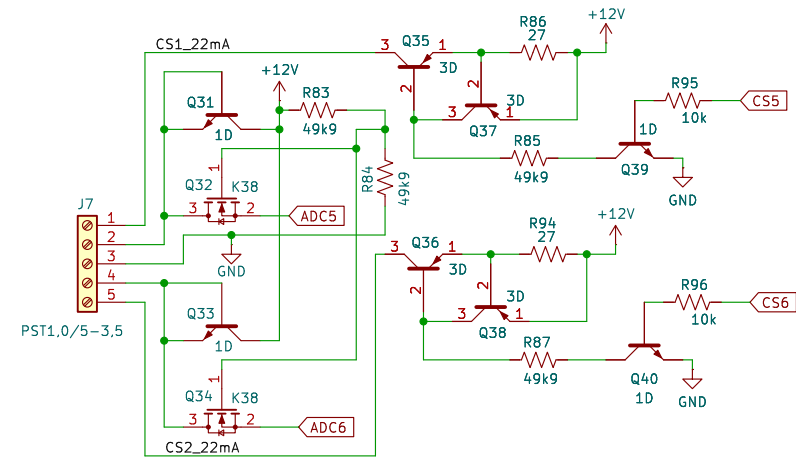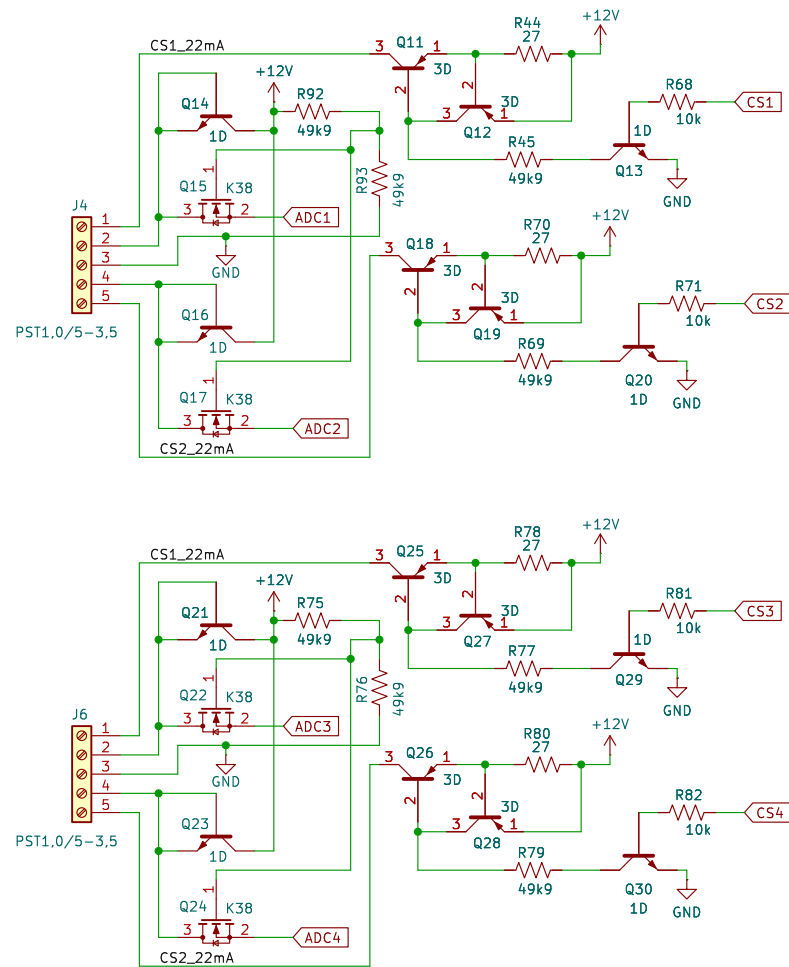

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Application Analog & Current Source/
File: App_ADC&CS.kicad_sch

Title: PCB003A FR4 2LYR RPi/MGR/APP LIGHTING


Size: A4

Date:

KiCad E.D.A. 9.0.8




Rev:

Id: 7/8

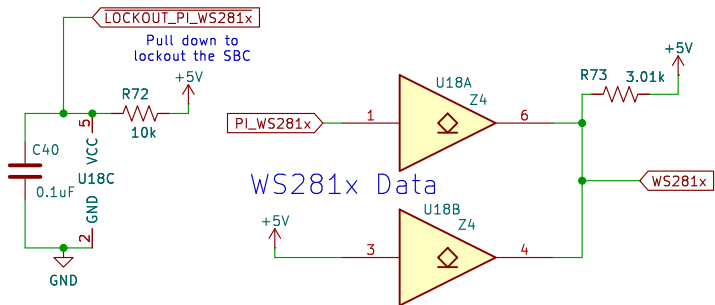


WS281x Data

Invert (not Buffer)

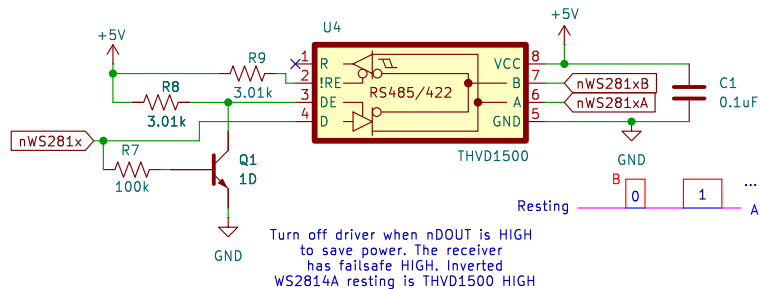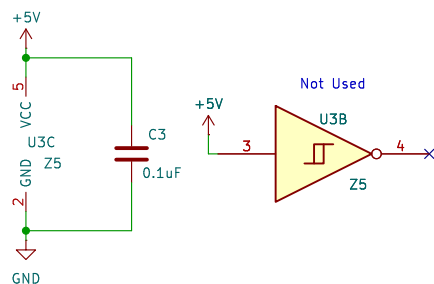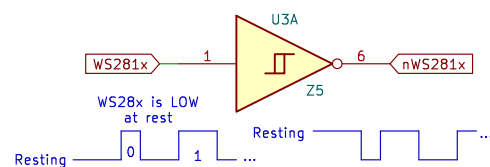

Turn off driver when nDOUT is HIGH to save power. The receiver has failsafe HIGH. Inverted WS2814A resting is THVD1500 HIGH

CAT5/CAT6 is by far the lowest cost, highest quality cabling option. Extend with "RJ45 Inline Couplers" with "POE++ rated" <https://www.truecable.com/products/cat6-waterproof-couplers-shielded>

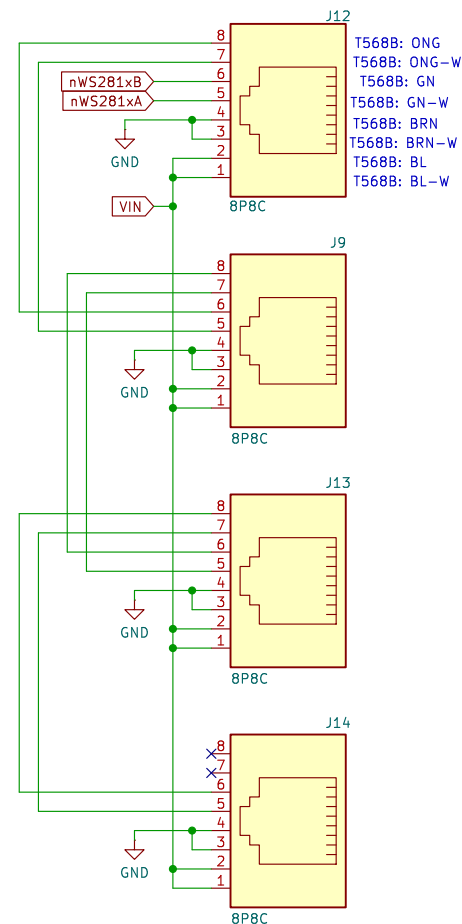

T568B: ONG
T568B: ONG-W
T568B: GN
T568B: GN-W
T568B: BRN
T568B: BRN-W
T568B: BL
T568B: BL-W

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Lighting Headers/
File: LightingHdr.kicad_sch

Title: PCB003A FR4 2LYR RPi/MGR/APP LIGHTING

Size: A4
KiCad E.D.A. 9.0.8

Date:

Rev:
Id: 8/8